

MODELS:

SRW26US / SRW26USG

SmartRack® Wall-Mount Rack Enclosure Cabinets



26 Rack Units



250 lb. Load Rating



Sturdy Steel Construction



Locking Doors & Side Panels



Clear Acrylic Front Window (SRW26USG only)



Hinged Wall Bracket



Standard 19" Rack Width



Convenient Cable Access



Adjustable Mounting Rails



Ventilated for Ample Airflow




Reversible Cabinet




Square/Threaded Hole Mounting

- A** Front Door (Lockable/Removable/Reversible. SRW26US door is perforated; SRW26USG door has a clear acrylic window.)
- B** Adjustable Mounting Rails (4) (Support square and threaded hole mounting options.)
- C** Side Panels (2) (Lockable/Removable)
- D** Hinged Wall Bracket (Lockable/Reversible. Allows the cabinet to swing away from the wall for convenient rear access to equipment and cabling.)
- E** Cable Access Port Covers (4) (Removable)
- F** Ventilation Fan Ports (4) (Support optional SRFANWM fan kit.)
- G** Keys (2)

Also Includes: Owner's manual, cabinet ground screw, pre-installed front door ground wire and rackmount equipment mounting hardware (48 cage nuts, 48 mounting screws, 48 #12-24 screws, 48 washers).

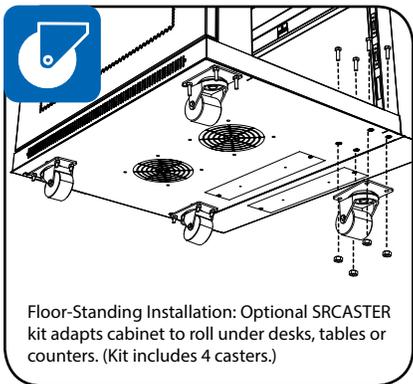

Floor-Standing Installation: Optional SRCASTER kit adapts cabinet to roll under desks, tables or counters. (Kit includes 4 casters.)

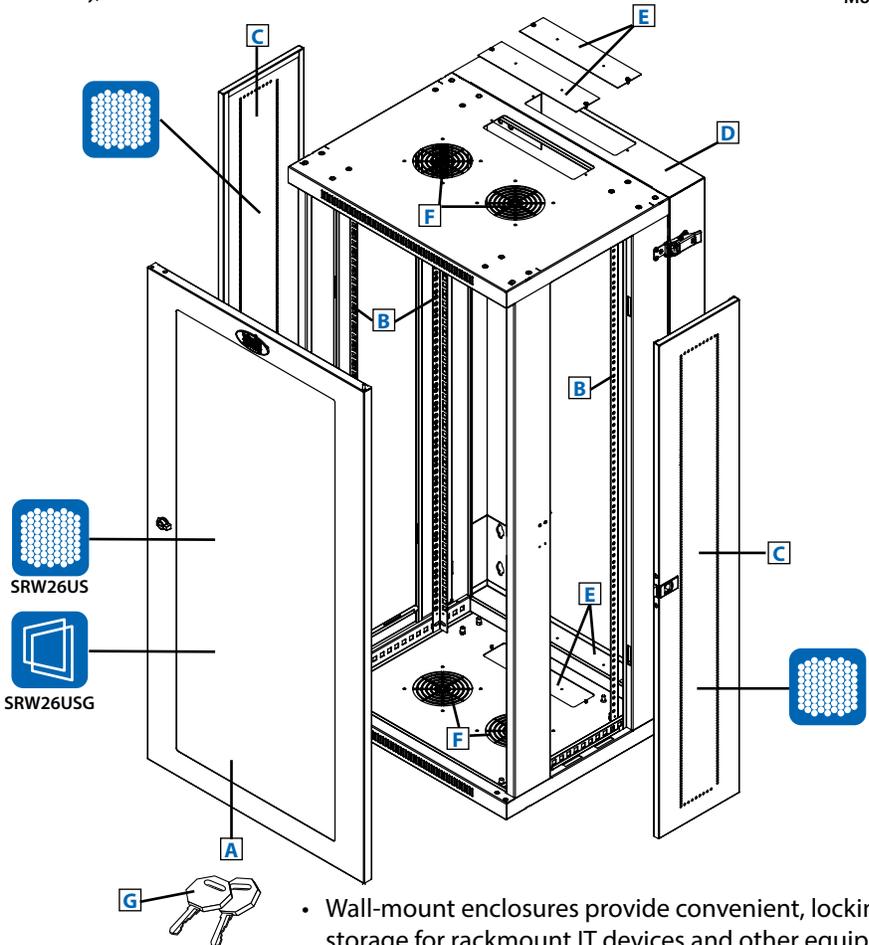

- Wall-mount enclosures provide convenient, locking storage for rackmount IT devices and other equipment that should be off the floor, out of the way and secure
- The cabinet is fully reversible, allowing installers to change door hinges from left to right by simply rotating the unit 180 degrees before mounting
- Hinged wall bracket allows cabinet to swing away from the wall for convenient access to equipment and cabling

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



Specifications

Model	SRW26US / SRW26USG
Rack Spaces	26U
Equipment Mounting Depth	Up to 20.5 in. (521 mm)
Load Rating*	250 lb. (113 kg)
Unit Dimensions [H x W x D]	49.56 x 23.62 x 21.52 in. (1258.7 x 600 x 546.5 mm)
Shipping Dimensions [H x W x D]	55.4 x 25.6 x 23.6 in. (1407.2 x 650.2 x 599.4 mm)
Unit Weight	125 lb. (56.6 kg)
Shipping Weight	140 lb. (63.5 kg)
Standards	Tested to UL/CSA 60950-1, IEC 60297-3-100, RoHS, NOM (Mexico), EIA/ECA-310-E, PCI Compliant, IP20 Protection Rating

* The load rating includes the combined weight of the unit and installed equipment. The unit must be mounted to a stable surface with user-supplied anchors capable of bearing the full load.



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

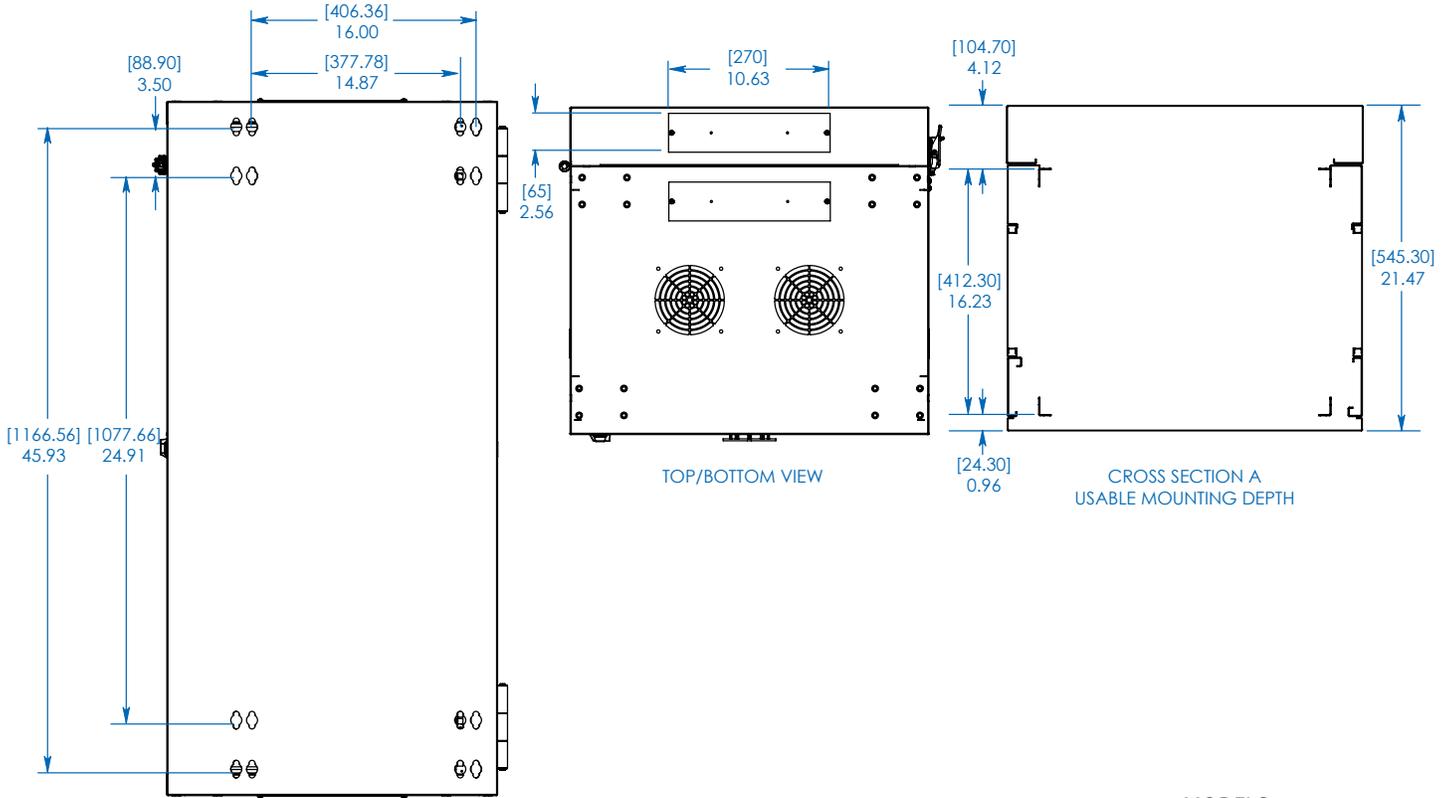
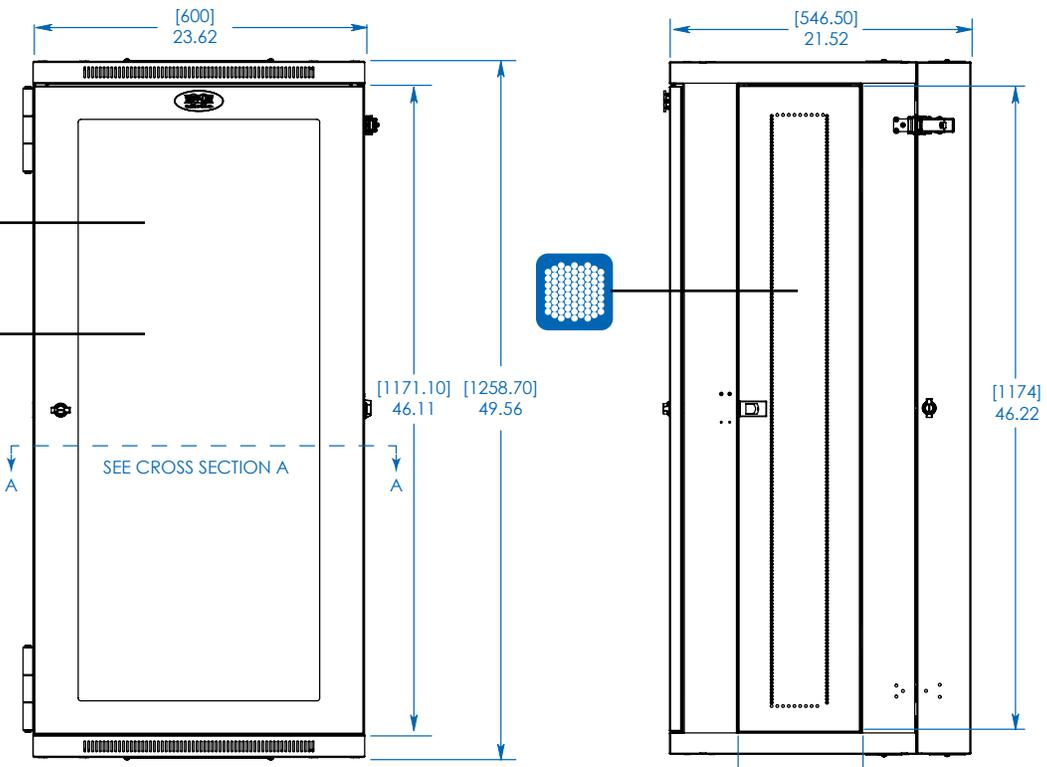


MODELS:
**SRW26US /
SRW26USG**



Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

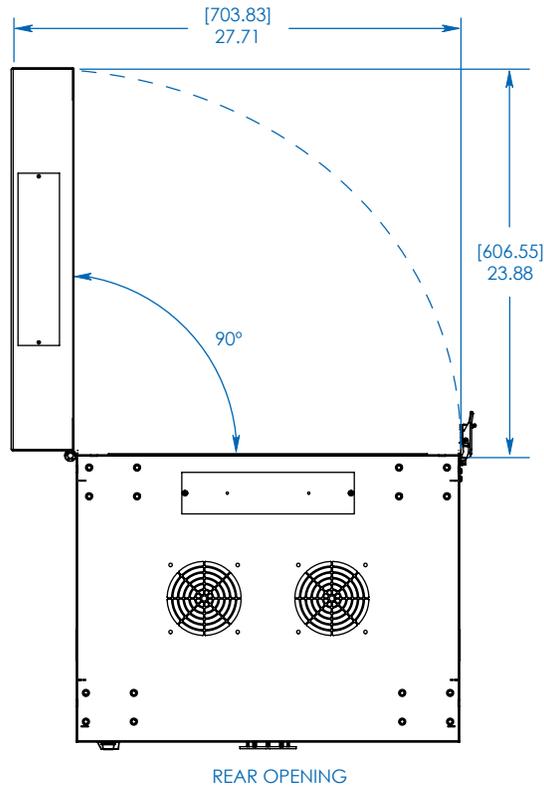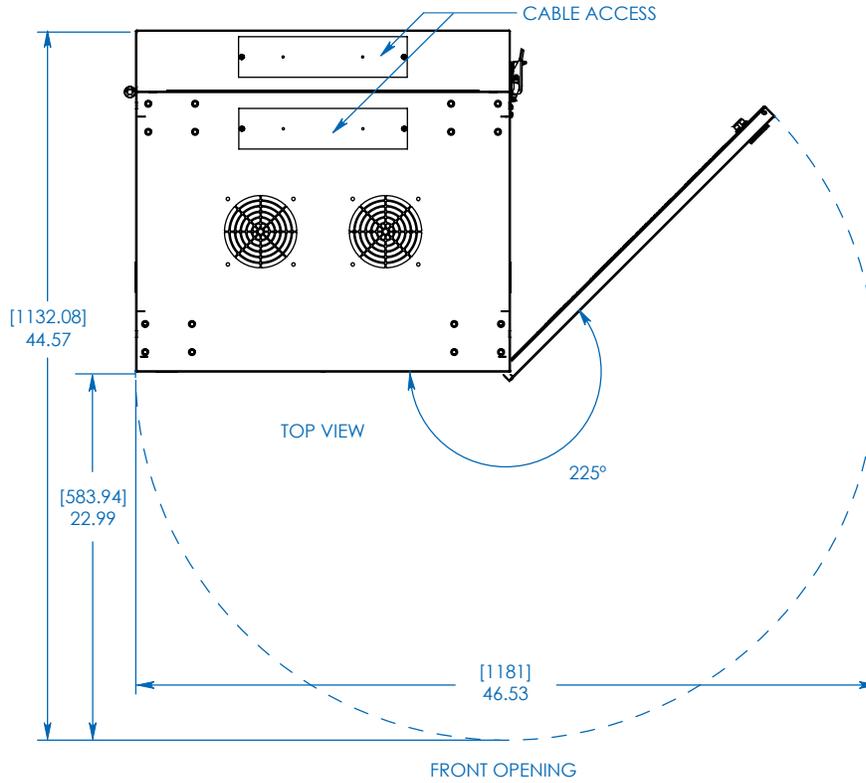

MODELS:
SRW26US /
SRW26USG



1111 W. 35th Street
 Chicago, IL 60609 USA
 773.869.1234
 www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.