

MODEL:

SRW12U13G

SmartRack® Wall-Mount Rack Enclosure Cabinet



12 Rack Units



200 lb Load Rating



Sturdy Steel Construction



Locking Doors & Side Panels



Clear Acrylic Window



Standard 19" Rack Width



Convenient Cable Access



Adjustable Mounting Rails



Ventilated for Ample Airflow




Reversible Cabinet



Square/Threaded Hole Mounting

- A** Front Door with Clear Acrylic Window (Lockable/Removable/Reversible)
- B** Adjustable Mounting Rails (2) (Support square and threaded hole mounting options.)
- C** Side Panels (2) (Lockable/Removable)
- D** Mounting Plate (Removable. Includes mounting hooks for cabinet.)
- E** Cable Access Port Covers (2) (Removable)
- F** Ventilation Fan Ports (4) (Support optional SRFANWM fan kit.)
- G** Keys (2)

Also Includes: Owner's manual, mounting plate screws (3), cabinet ground screw, pre-installed front door ground wire and rackmount equipment mounting hardware (20 cage nuts, 20 M6 x 16mm mounting screws, 20 #12-24 x 5/8" mounting screws, 20 nylon cup washers)

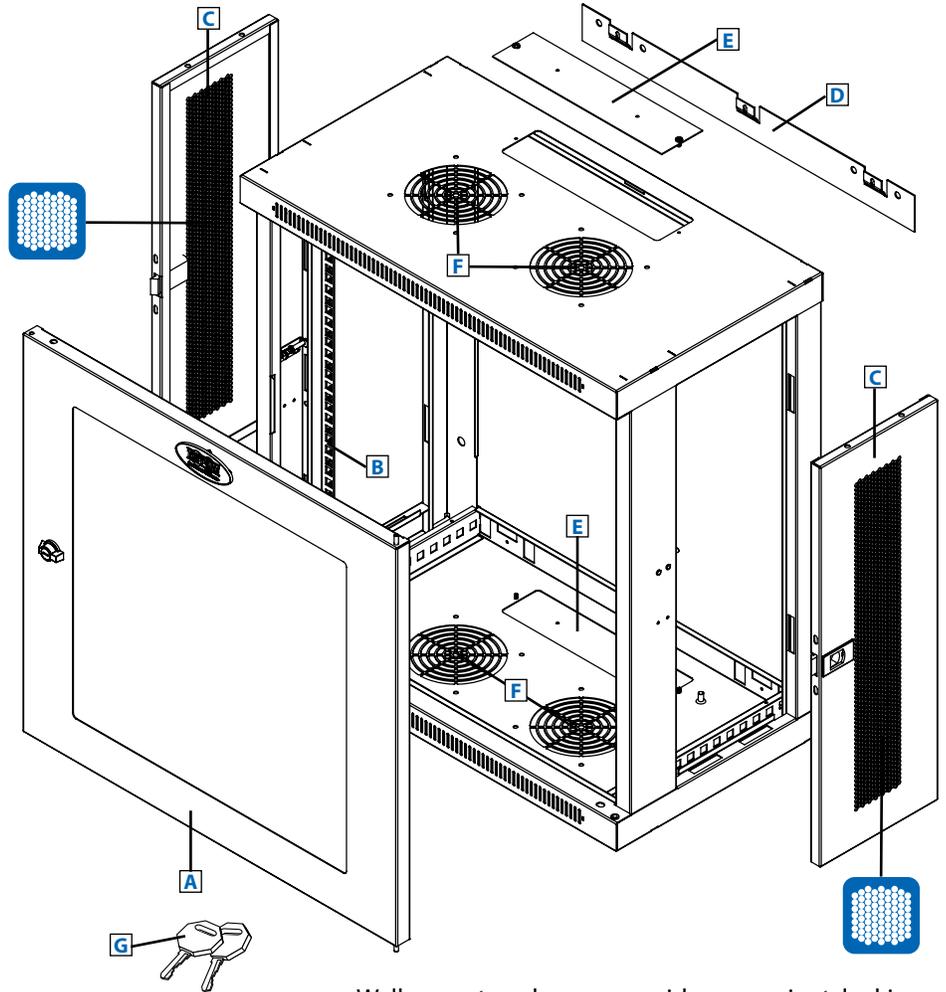

- Wall-mount enclosures provide convenient, locking storage for rackmount IT devices and other equipment that should be off the floor, out of the way and secure
- The cabinet is fully reversible, allowing installers to change door hinges from left to right by simply rotating the unit 180 degrees before mounting

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS




1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

Specifications


Model	SRW12U13G
Rack Spaces	12U
Equipment Mounting Depth	Up to 13 in (330.2 mm)
Load Rating*	200 lb (90.7 kg)
Unit Dimensions (H x W x D)	25.08 x 23.62 x 13 in (637 x 600 x 330.2 mm)
Shipping Dimensions (H x W x D)	27.56 x 25.6 x 15.75 in (700 x 650.2 x 400.1 mm)
Unit Weight	38 lb (17.2 kg)
Shipping Weight	40 lb (18.1 kg)
Standards	Tested to UL 60950-1, IEC 60950-1, RoHS, CE, NOM (Mexico), EIA/ECA-310-E, GOST

* The load rating includes the combined weight of the unit and installed equipment. The unit must be mounted to a stable surface with user-supplied anchors capable of bearing the full load. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.




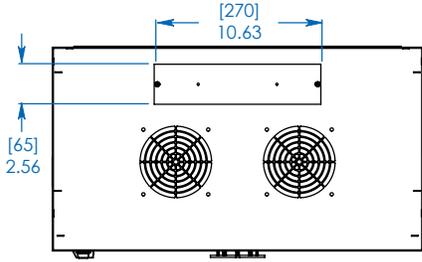


TOP/BOTTOM VIEW

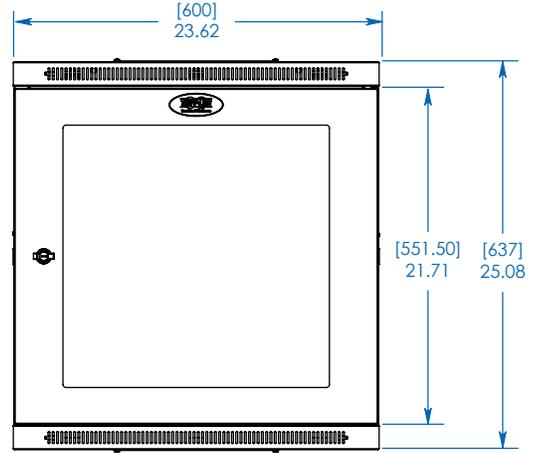


FRONT VIEW

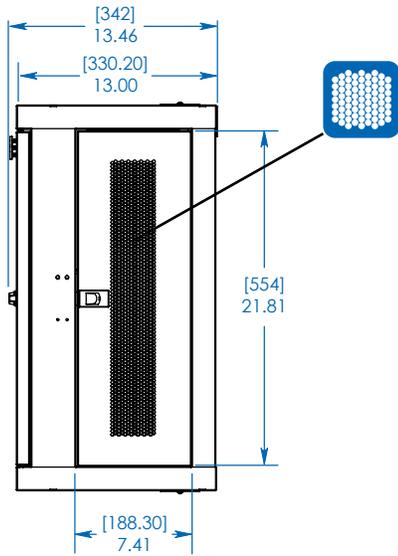

SIDE VIEW

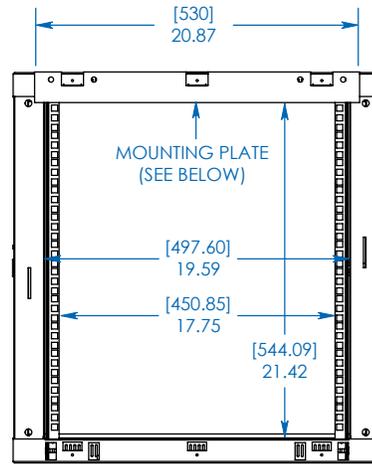


REAR VIEW

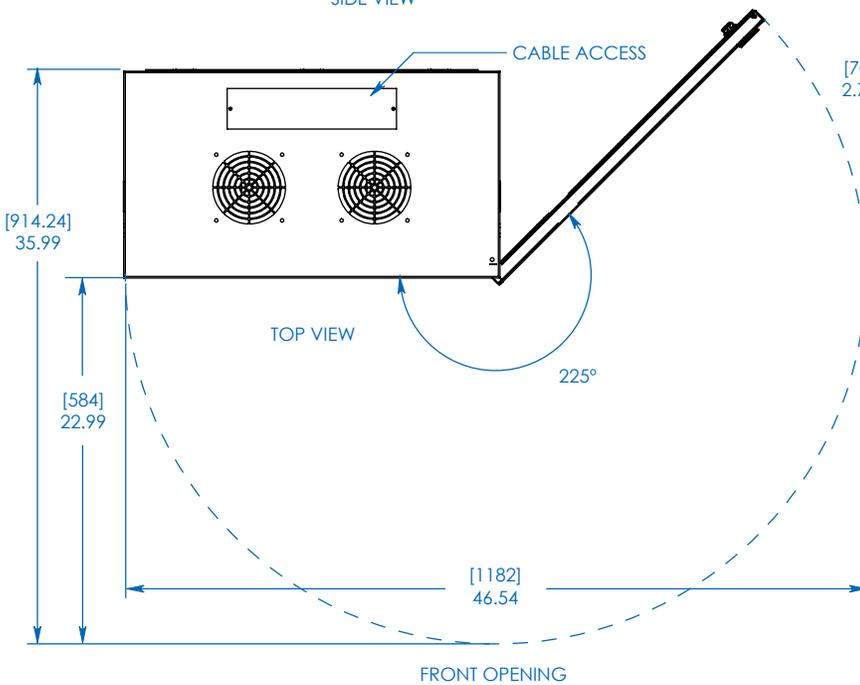

TOP VIEW

FRONT OPENING



MOUNTING PLATE

USER-SUPPLIED
M8 OR 5/16"
BOLTS ANCHOR
PLATE TO WALL

INCLUDED
SCREWS
SECURE
HOOKS TO
CABINET

MODEL:
SRW12U13G



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234

www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.