

MODELS:

# SR45UBMDND / SR45UBMDEXPND

## SmartRack® Mid-Depth Rack Enclosure



45 Rack Units



3000 lb.  
Stationary  
Load Capacity



2250 lb.  
Rolling  
Load Capacity



Heavy-Duty  
Casters



Locking Side  
Panels



Standard 19-inch  
Rack Width



Toolless  
Mounting Slots



Adjustable  
Rails with  
Easy-View  
Depth Index





Integrated  
Baying Tabs



Square Hole  
Mounting

- A** Adjustable Mounting Rails (4)
- B** Adjustable PDU Mounting Rails with Toolless Mounting Slots (2 rails hold up to 4 vertical PDUs.)
- C** Roof Panel (Removable)
- D** Side Panels (4)  
(Lockable/Removable; not included with SR45UBMDEXPND.)
- E** Rolling Casters (4)
- F** Levelers (4)
- G** Keys  
(For side panels.)

Also Includes: Owner's manual,  
2 shipping/stabilizing brackets and rackmount  
equipment mounting hardware (50 cage nuts,  
50 mounting screws, 50 nylon cup washers).

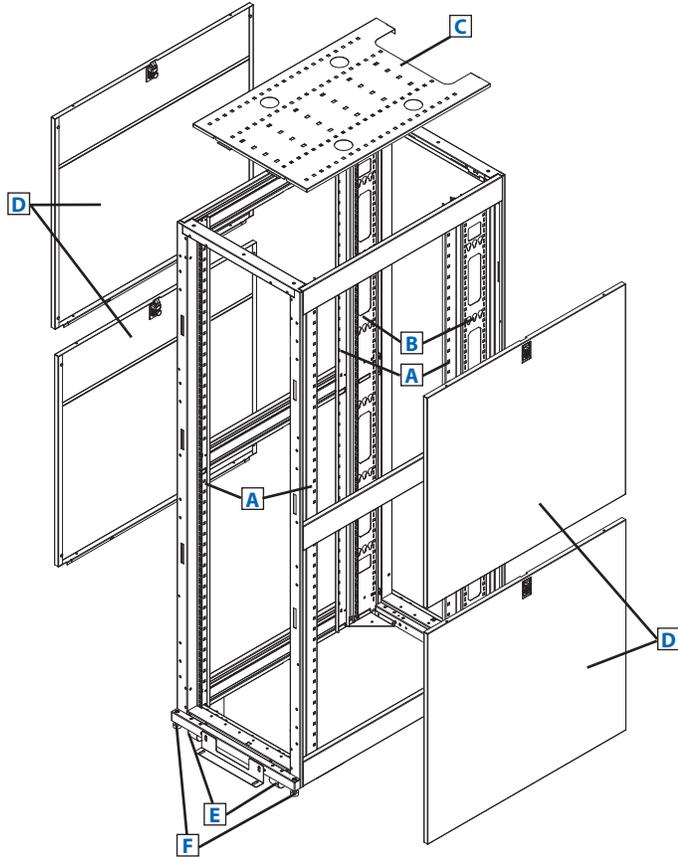

### Specifications

<b>Model</b>	SR45UBMDND
Rack Spaces	45U
Stationary Load Capacity	3000 lb. (1361 kg)
Rolling Load Capacity	2250 lb. (1021 kg)
Unit Dimensions (H x W x D)	83.75 x 23.63 x 36 in. (2127 x 600 x 914 mm)
Shipping Dimensions (H x W x D)	90.3 x 26 x 37.8 in. (2294 x 660 x 960 mm)
Unit Weight	210 lb. (95 kg)
Shipping Weight	260 lb. (118 kg)
Certifications	EIA-310-E, IEC 60297-3-100, UL 60950, RoHS, NOM
<b>Model</b>	SR45UBMDEXPND (Without side panels.)
Unit Weight	140 lb. (63.5 kg)
Shipping Weight	190 lb. (86 kg)

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.






- Enclosures ship fully assembled for rapid deployment, but can be knocked down for easy reassembly in confined spaces
- Modular design optimized for quick configuration and reconfiguration
- Ideal for rackmount server, network and telecom applications

**SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS**



1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234  
www.tripplite.com

Also Available: Shock pallet models with special packaging to facilitate equipment pre-installation and reshipment to final site. Heavy-duty shock pallet holds up to 1250 lb. (568 kg), including the weight of the enclosure and pre-installed equipment. Add "SP1" to model numbers above to order shock pallet models.

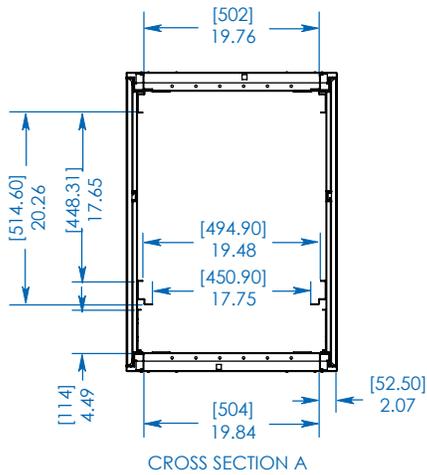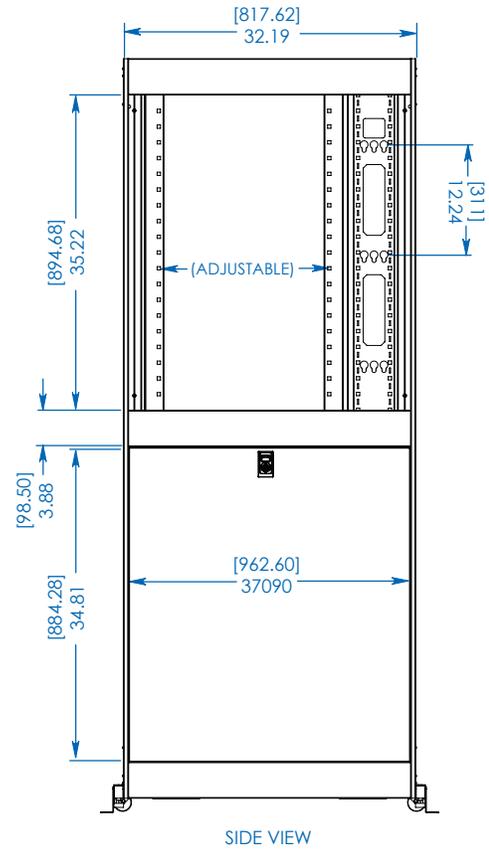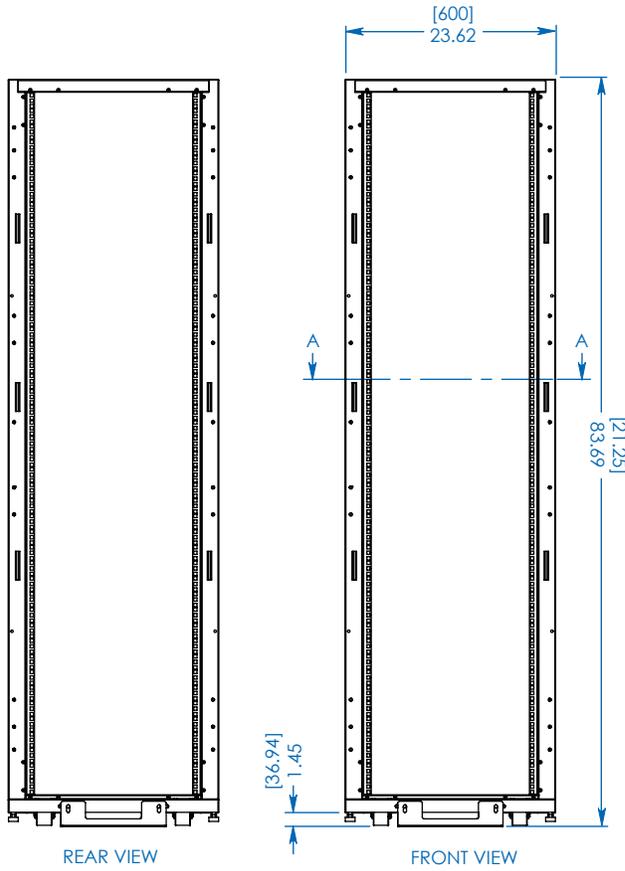


MODELS:  
**SR45UBMDND**  
**SR45UBMDEXPND**




Dimensions: [mm] INCHES


Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

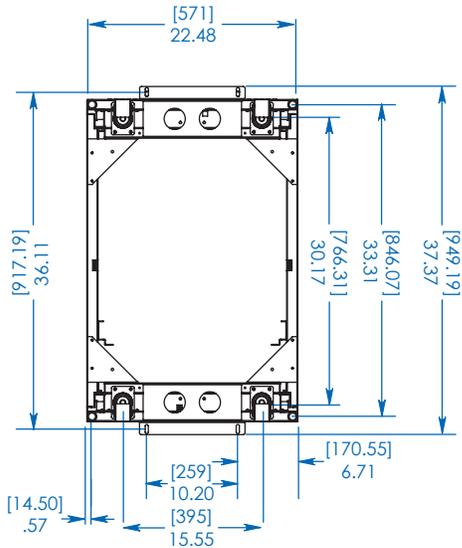

BOTTOM VIEW

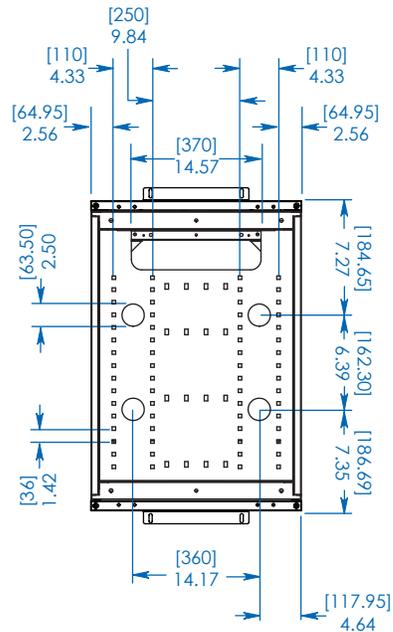

TOP VIEW

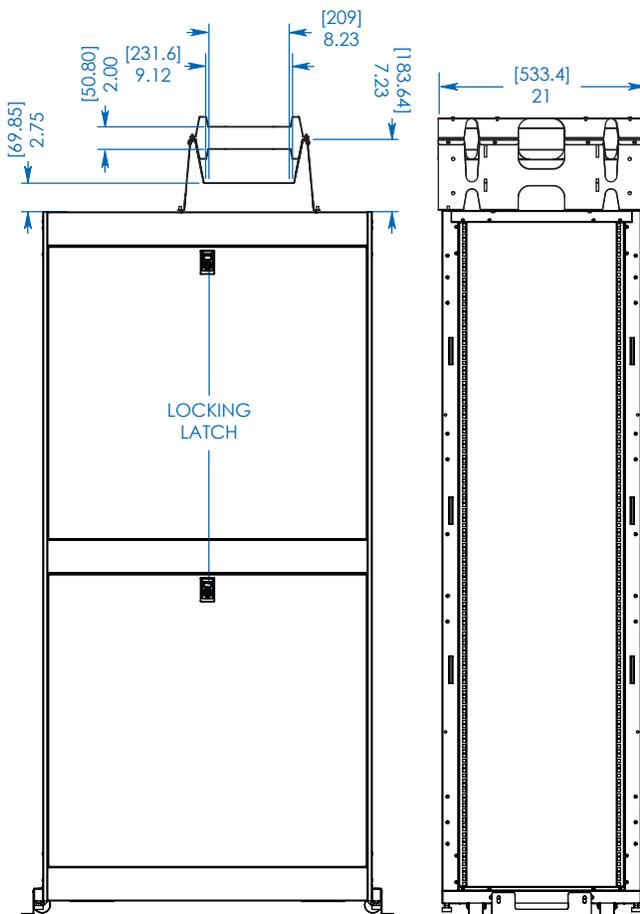

SIDE VIEW

REAR VIEW

FRONT VIEW

OPTIONAL SRCABLETRAY AND SRCABLETRAYEXP CABLE MANAGEMENT ACCESSORIES SHOWN (MOUNTING POSITION ADJUSTS TO ACCOMMODATE A WIDE RANGE OF APPLICATIONS)

MODELS:  
**SR45UBMDND**  
**SR45UBMDEXPND**



1111 W. 35th Street  
 Chicago, IL 60609 USA  
 773.869.1234  
 www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.