

MODEL:

SRW6UWG

SmartRack® Wall-Mount Rack Enclosure Cabinet



6 Rack Units



200 lb.
Load Rating



Sturdy Steel
Construction



Locking Doors
& Side Panels



Clear Acrylic
Window



Standard
19" Rack Width



Convenient
Cable Access




Adjustable
Mounting Rails



Ventilated for
Ample Airflow



Reversible
Cabinet




Square/
Threaded Hole
Mounting

- A** Front Door with Clear Acrylic Window
(Lockable/Removable/Reversible)
- B** Adjustable Mounting Rails (2)
(Support square and threaded hole mounting options.)
- C** Side Panels (2)
(Lockable/Removable)
- D** Mounting Plate
(Removable. Includes mounting hooks
for cabinet.)
- E** Cable Access Port Covers (2)
(Removable)
- F** Ventilation Fan Ports (4)
(Support optional SRFANWM fan kit.)
- G** Keys (2)

Also Includes: Owner's manual, mounting plate screws (3), cabinet ground screw, pre-installed front door ground wire and rack-mount equipment mounting hardware (12 cage nuts, 12 mounting screws, 12 #12-24 screws, 12 nylon cup washers).



Floor-Standing Installation: Optional SRCASTER kit adapts cabinet to roll under desks, tables or counters. (Kit includes 4 casters.)

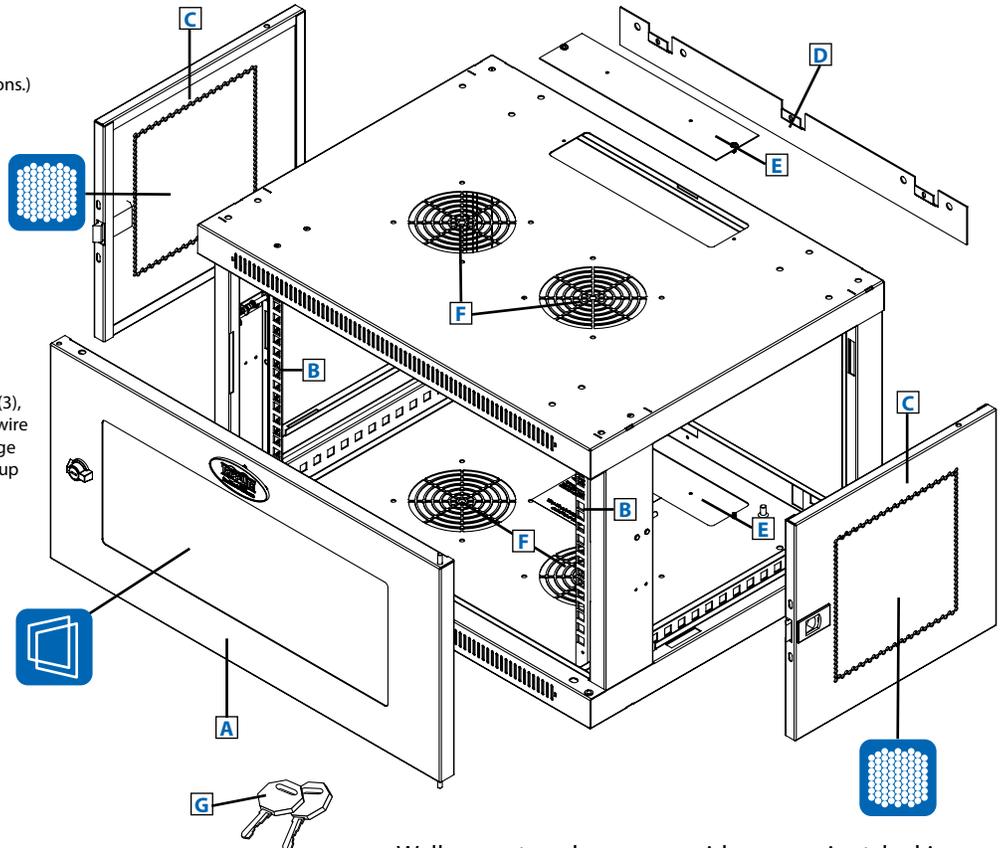

- Wall-mount enclosures provide convenient, locking storage for rack-mount IT devices and other equipment that should be off the floor, out of the way and secure
- The cabinet is fully reversible, allowing installers to change door hinges from left to right by simply rotating the unit 180 degrees before mounting
- Front door with shatter-resistant clear acrylic window allows for easy equipment monitoring
- Durable white powder-coated finish reflects light and heat for lower energy costs

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS




1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

Specifications


Model	SRW6UWG
Rack Spaces	6U
Equipment Mounting Depth	Up to 16.5 in. / 419 mm
Load Rating*	200 lb. / 90.7 kg
Unit Dimensions (H x W x D)	14.5 x 23.5 x 17.5 in. / 368 x 596 x 445 mm
Shipping Dimensions (H x W x D)	17.3 x 25.8 x 19.9 in. / 439 x 655 x 505 mm
Unit Weight	29 lb. / 13 kg
Shipping Weight	33 lb. / 15 kg
Standards	Tested to EIA/ECA-310-E, UL/CSA 60950-1, NOM (Mexico), RoHS

* The load rating includes the combined weight of the unit and installed equipment. The unit must be mounted to a stable surface with user-supplied anchors capable of bearing the full load.




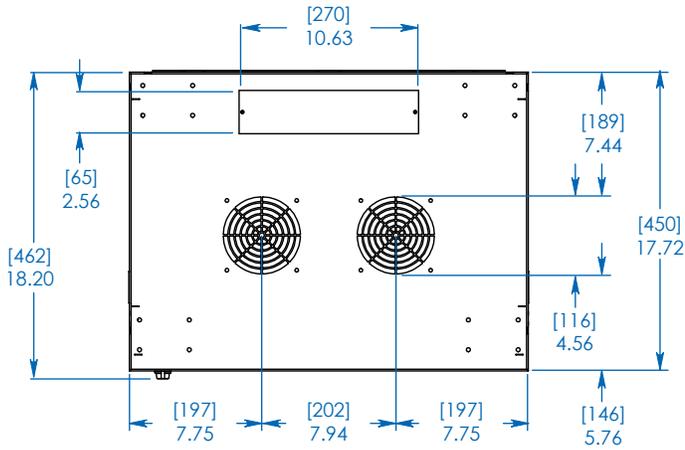


TOP/BOTTOM VIEW

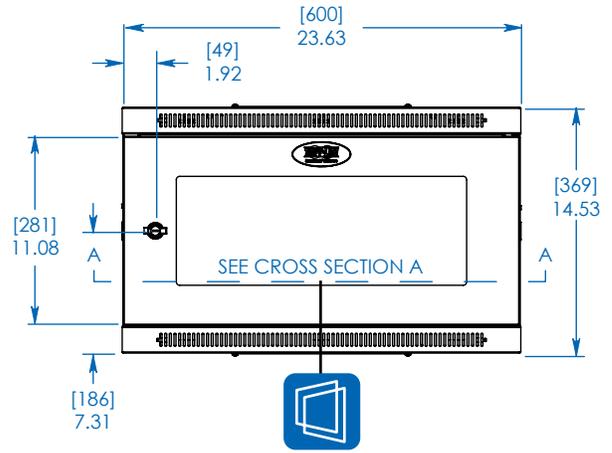


FRONT VIEW

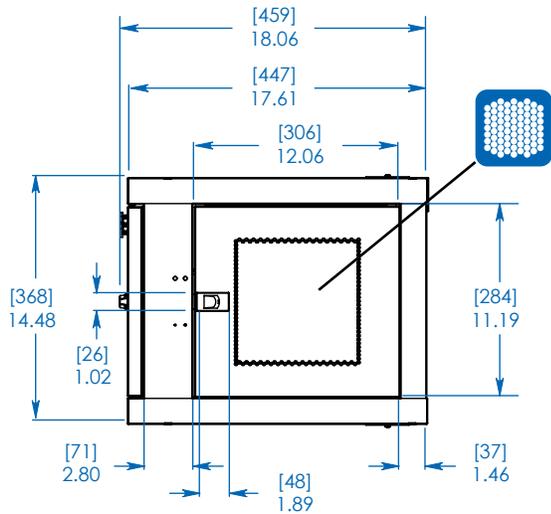

SIDE VIEW

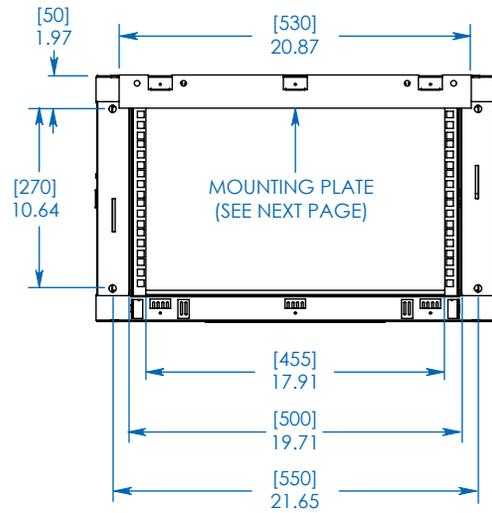

REAR VIEW (FRONT DOOR NOT SHOWN)


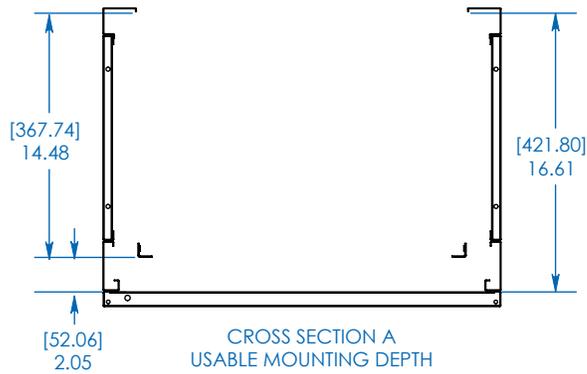


CROSS SECTION A
USABLE MOUNTING DEPTH

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:
SRW6UWG
TRIPP·LITE

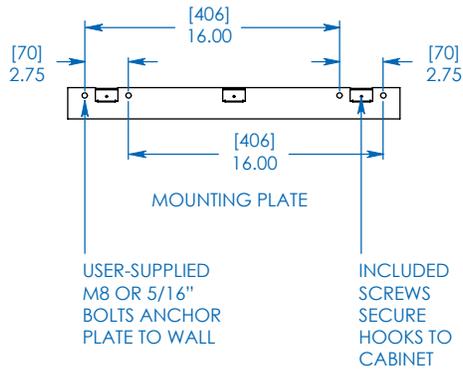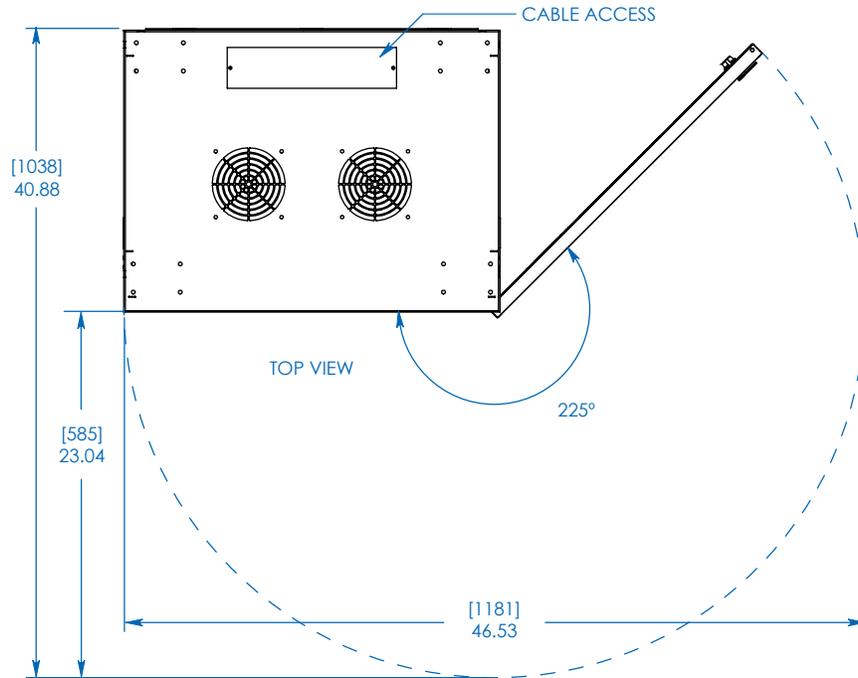

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:
SRW6UWG
TRIPP·LITE

1111 W. 35th Street
 Chicago, IL 60609 USA
 773.869.1234
 www.tripplite.com