


# USB Type-C Connector

## CX Series

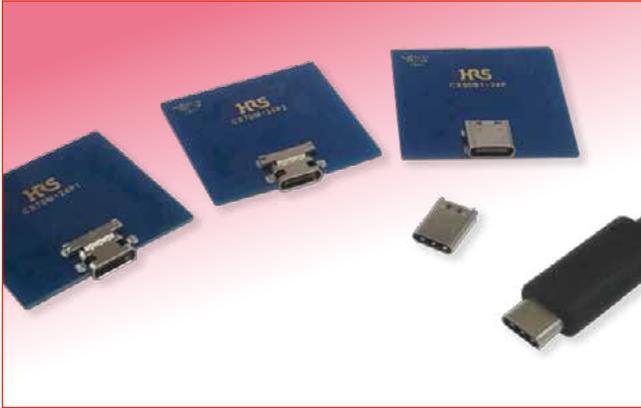

Note: Please contact us for TID acquisition status of each product.

### Overview

The CX series connector conforms to the next-generation USB standard "USB Type-C™". It is expected to be widely adopted as a standard interface in various devices in the consumer, industrial machinery and automobile market.

※"USB Type-C™" is a registered trademark of USB Implementers Forum, INC

### Features

#### 1. Easy mating due to the reversible form factor

The symmetrical design eliminates concern for backward insertion. You simply insert the plug in either directions.

#### 2. Conforms to the USB type-C standard

#### 3. USB 3.1 Gen2, 10Gbps high speed transmission

USB Type-C can transfer the data twice as fast compared to the conventional USB 3.0(5Gbps), 10Gbps(Max.)

Also, if alternate mode is applied, it becomes possible to meet various video transmission standards such as MHL and Display Port.

#### 4. Clear tactile click (Excellent Retention)

CX series has a superior "click feel" when mating and is designed to prevent incomplete mating.

#### 5. Design with superior mechanical strength

#### 6. Plug: Slim overmold design

#### 7. Many varieties

Hybrid type (Mid-mount) : Easy for solder reworking  
Double-row SMT(Top-mount) : Excellent for high-speed transmission

#### 8. RoHS compliant, halogen-free product

CX series is halogen-free product.  
(Maximum content of Br, Cl and Br+Cl total are 900ppm, 900ppm and 1500ppm, respectively.)

Mid-mount



Top-mount



## ■ Product Specifications

Ratings	Rated Current	1.25A (Pin No. A1, A4, A9, A12, B1, B4, B9, B12) 0.25A(Others)	Rated Voltage	AC 20V
			Operating Temp. Range	-30°C ~ +85°C (Note 1)
			Storage Temp. Range	-10°C ~ +60°C

Items	Specifications	Conditions
1. Contact resistance	40mΩ max.	Measured at 100mA (DC or 1000Hz)
2. Withstand voltage	No flashover or breakdown	100V AC / 1min.
3. Durability	Contact resistance : Increase by 10mΩ or less from the initial value	10,000 mating cycles
4. Overall insertion / Extraction forces	Insertion : 5~ 20N, Extraction : 8~ 20N	Measured with applicable connector

Note 1: Includes temperature rise caused by current flow.

Note 2: The above specifications are representative of this series.

Hirose does not guarantee specified performance when mating with other manufacturers' parts.

## ■ Materials / Finish

### ● Receptacle

Parts	Materials	Color/Finish
Insulator	LCP or Polyamide	Black/UL94V-0
Contact	Copper alloy	Mating part : Nickel-palladium plating + Gold flash plating Mounting part : Gold flash plating
Ground-plate	Stainless steel	-
Mid plate	Stainless steel	Nickel plating
Shell	Stainless steel	Nickel plating

### ● Plug

Parts	Materials	Color/Finish
Insulator	LCP or Polyamide	Black/UL94V-0
Contact	Copper alloy	Mating part : Nickel-palladium plating + Gold flash plating Mounting part : Gold flash plating
Lock spring	Stainless steel	Nickel plating
Ground spring	Stainless steel	Nickel plating
Shield	Stainless steel	Nickel plating

※ This is a halogen-free product.

(Maximum content of Br, Cl and Br+Cl total are 900ppm and 1500ppm, respectively.)

Note: The above data is representative of this series. Data may vary according to specifications.

## Product Number Structure

Refer to the chart below when determining the product specifications from the product number.  
Please select from the product numbers listed in this catalog when placing orders.

### ● Receptacle

**CX 90 \* \* - \*\* \* \***  
 ① ② ③ ④ ⑤ ⑥ ⑦

### ● Plug

**CX 60 \*\* \* - UNIT**  
 ① ② ⑤ ⑥ ⑧

**CX 60 - SLDA**  
 ① ② ⑧

① Series name		CX
② Mounting type	60 70 90	Paddle Card (PCB wire soldering) Right angle Hybrid (SMT+DIP) Right angle SMT
③ Board mounting Style (Receptacle)	B M Blank	Top-mount Mid-mount None
④ No. of serial		None or 1, 2, 3, ... (CX90 Series only)
⑤ No. of contact		24
⑥ Contact type	P S	Receptacle (Male contacts) Plug (Female contacts)
⑦ No. of serial		None or 1,2,3,... (CX70 Series only)
⑧ Plug components	UNIT SLDA	Plug unit Plug shell

## Product Variation

	Mounting Type	Product Name	3D Image	Size W x H x D (mm)	Page
Receptacle	Hybrid (SMT+DIP) Mid-mount	CX70M-24P1		11.40x3.66x8.35	5 page
		CX70M-24P2		11.40x3.66x7.95	5 page
	Double-row (SMT) Top-mount	CX90B1-24P		8.94x3.14x8.15	6 page
Plug	Paddle Card (PCB wire soldering)	Unit : CX60-24S-UNIT  Plug Shell : CX60-SLDA		8.25x2.40x11.10	6~7 page



## ■ Receptacle

### ● Hybrid Type Mid-mount - Length 8.35mm



Part No.	HRS No.	Packaging
CX70M-24P1	480-0304-0 00	1,500pcs/Reel

### ◆ Recommended PCB layout(component side)

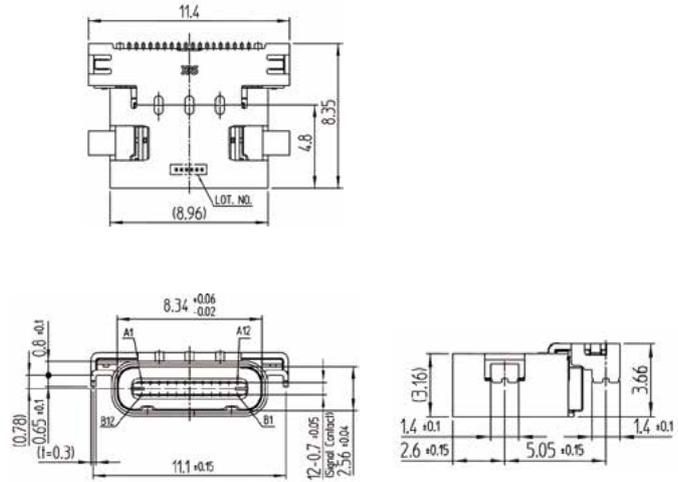
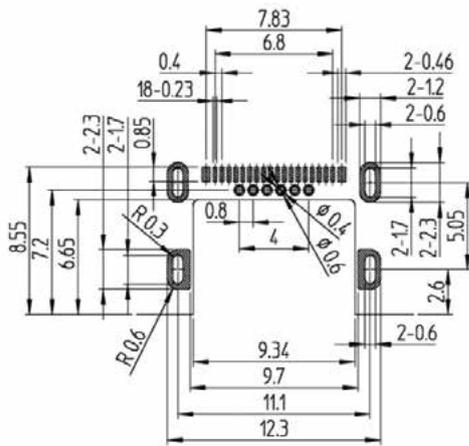


### ● Hybrid Type Mid-mount - Length 7.95mm



Part No.	HRS No.	Packaging
CX70M-24P2	480-0329-0 00	1,500pcs/Reel

### ◆ Recommended PCB layout(component side)



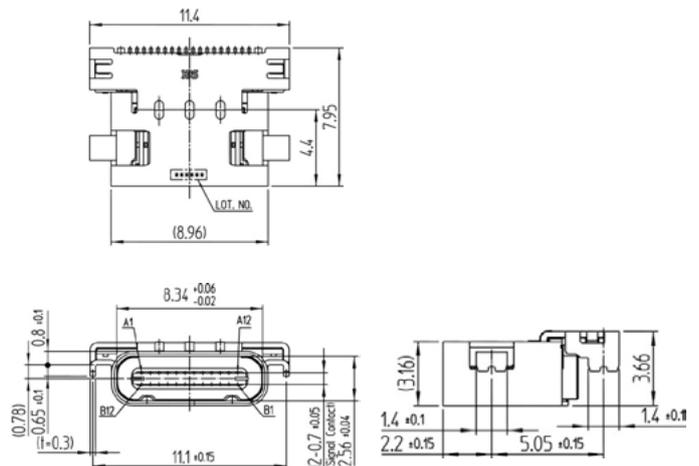
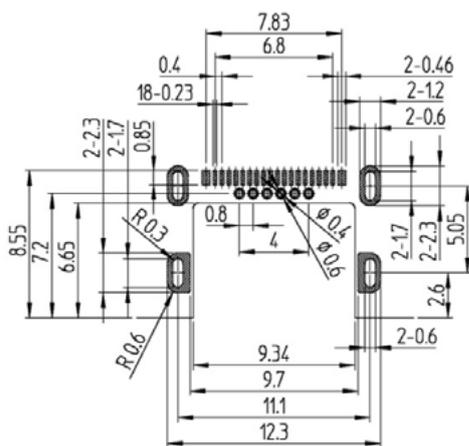


**Receptacle**

● Double-row type [Top-mount]



Part No.	HRS No.	Packaging
CX90B1-24P	480-0497-0 00	1,500pcs/Reel

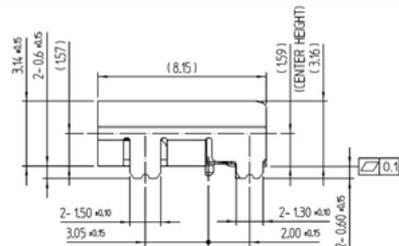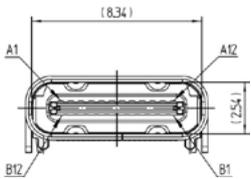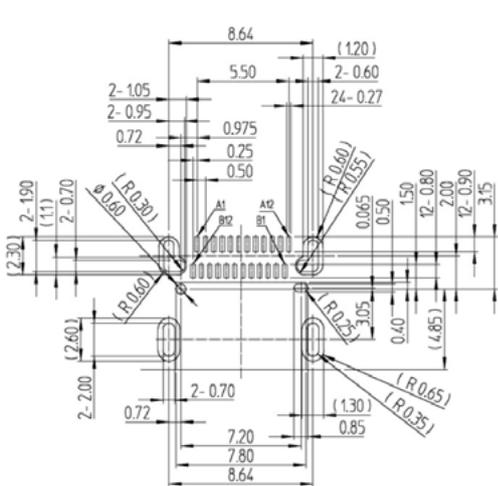

**Plug**





● Plug unit



Part No.	HRS No.	Packaging
CX60-24S-UNIT	480-0465-0-00	150pcs/Pack

Note : Cable assembly instructions are separately available.




◆ Recommended PCB layout(component side)

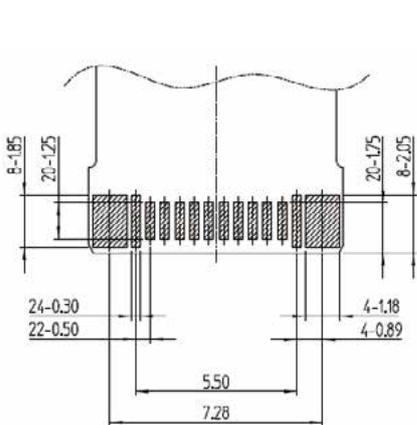

● Plug Shell




Part No.	HRS No.	Packaging	Cable diameter
CX60-SLDA	TBD	3,000pcs/Reel	Φ4.8

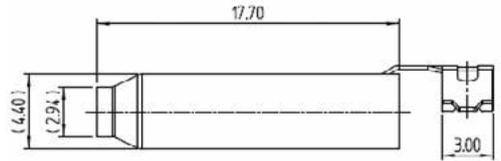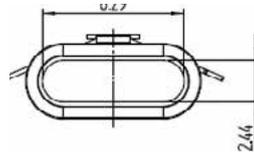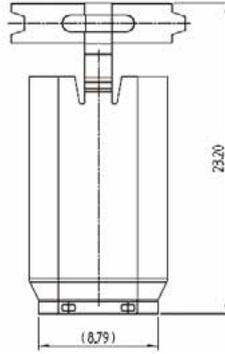


Parts	Plug assembly image
<p>[CX60-24S-UNIT]</p>	<p>[Assembled UNIT and SLDA]</p>
<p>[CX60-SLDA]</p>	<p>[Plug harness]</p>

◆ Packaging Specification(JIS C 0806-3 compliant)

● Emboss Carrier Tape Dimensions

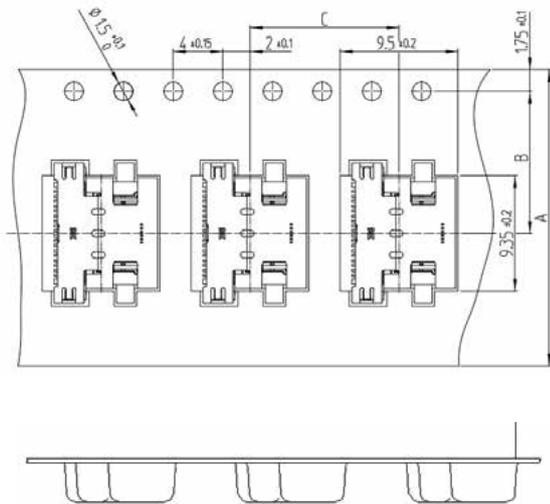


● Reel Dimensions

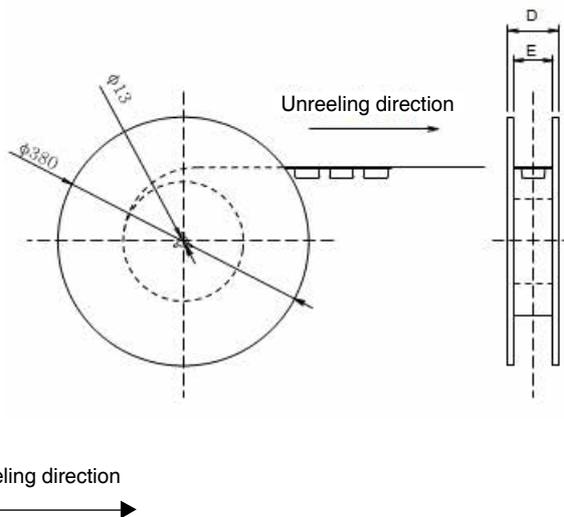

Part No.	A	B	C
CX70M-24P1	24	11.5	12
CX70M-24P2	24	11.5	12
CX90B1-24P	24	11.5	12

Part No.	D	E
CX70M-24P1	30	26
CX70M-24P2	30	26
CX90B1-24P	30	26

◆ Receptacle Recommended Solder Temperature Profile

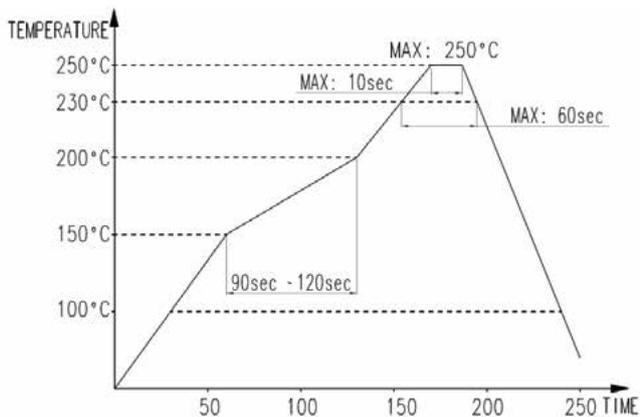

The temperature profile is based on the left conditions. In individual applications the actual temperature may vary, depending on solder paste type, volume/thickness and board size/thickness. Contact your solder paste and equipment manufacturer for specific recommendations.

Note 1 : Reflow is allowed up to 2times with the same conditions.

Please allow the parts to return to the ambient temperature before the second run is started.

Note 2 : The measured temperature is the temperature of the PCB surface around the connector leads.

◆ Precautions

1. Please handle connectors with care. Excessive external force may damage the connectors.
2. To extract the plug, hold the plug body itself and remove it straight away from the receptacle. Do not pull on the cable to extract the plug as this may damage the connector.
3. Due to the assembly process there may be some abrasions on the surface of the receptacle. This will not have a negative impact on the performance of the product.
4. Due to external variances, the plating appearance on the surface of the receptacles may differ from lot to lot. This difference will not affect the performance of this product.

