
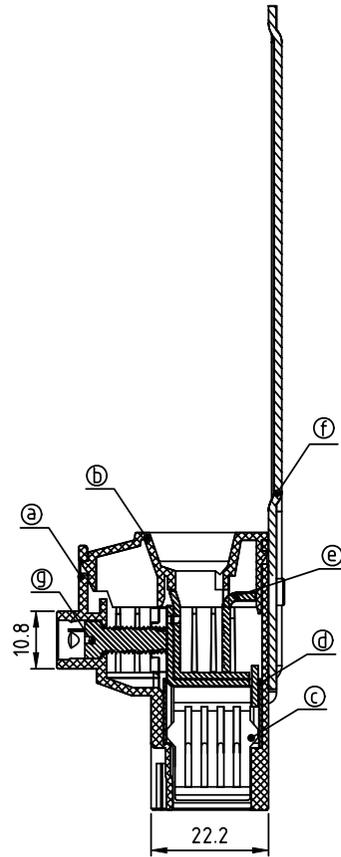


PRODUCT NUMBER	PITCH
KX04C1x200J0G	15.00 mm

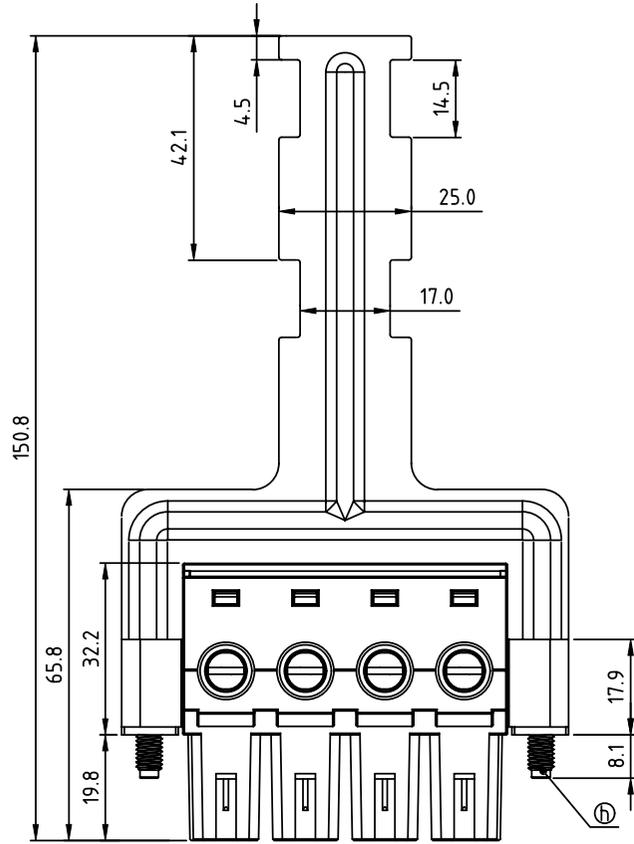


Material:

- Item (a) Terminal housing: Thermoplastic (UL94V-0)
- Item (b) Terminal cover: Thermoplastic (UL94V-0)
- Item (c) Female contact: Copper. Tin plated
- Item (d) Wire guard : Stainless Steel
- Item (e) Clamp: Steel, Zinc plated
- Item (f) Handle: Steel t=1.5mm, Zinc plated
- Item (g) Terminal screw: Steel, Zinc plating"-slot type,M5
- Item (h) With flange screw: Steel, Zinc plating"*pozi type,M5

Electrical:

- cULus
- Voltage rating: 600 V
- Current rating: 115 A
- Wire range:
- Solid wire(AWG): 2-20
- Stranded wire(AWG): 2-20
- Torque(Lb-In): 36.5
- Screw: M5
- Wire strip length: 19-20mm
- Withstanding Voltage: 2.2 KV
- Operating temperature: -40°C to +115°C
- Safety Approval:

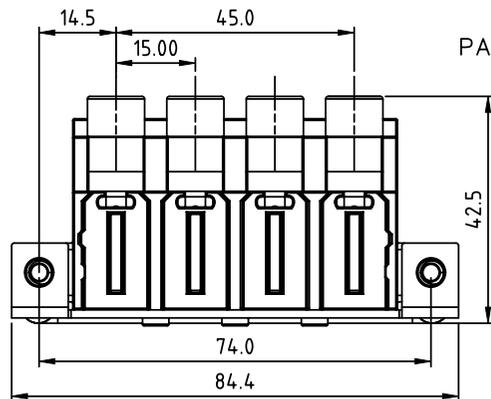

PART NO.: KX 04 C 1 x 2 00J0 G

- | | | |
|---|-------------------|-----------------|
| | Color | RoHS compliant |
| 0 | Black (RAL9005) | (lead<4%) |
| 2 | Red (RAL3001/D) | In copper Alloy |
| 3 | Orange(RAL2011/P) | |
| 4 | Yellow(RAL1018/A) | |
| 5 | Green(RAL6018/T) | |
| 6 | Blue (RAL5015/A) | |
| 8 | Grey(RAL7035/D) | |
| 9 | White(RAL1102) | |
| C | Green(RAL6018/U) | |

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection	product family
tr		tolerances unless otherwise specified			TERMINAL BLOCK
ecn	no	dr	date	MM	title
				scale	TERMINAL BLOCK
					PLUGGABLE PLUG, WITH FLANGE AND HANDLE
					sheet 1 of 1 size
					dwg no
					KX04C1x200J0G
					A4
					type
					CUSTOMER Drawing
sheet index	revision	A			
	sheet	1			