

## SUMMARY

### # Wires

Low	2
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	0S
Termination type	Male crimp
IP rating	50
Cable Ø	5.30 - 6.20 mm
Matching parts	ERA.0S.302.CYM
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FFA*: Straight plug with oversize cable collet
Keying	
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	K62: 5.3 - 6.2 mm
Variant	

### Performance

Configuration	0S.302 : 2 Low Voltage
Insulator	Y: PEEK for crimp contacts
Rated Current	10 Amps

### Specifications

Contact Type: Crimp  
Vtest: 1100 V (AC), 1600 V (DC)


### Others

Endurance (Shell): 5000 mating cycles

Temp (min / max): -55° C / +250° C  
 Humidity (max): <=95% [at 60 deg C /140 F]  
 Vibration: 15 g [10 Hz - 2000 Hz]  
 Shock Resistance: 100 g [ 6 ms]  
 Salt Spray Corrosion: >144 hr  
 Climatological Category: 50/175/21  
 Shielding (min): 75 dB (10 MHz)  
 Shielding (min): 40 dB (1 GHz)  
 IP Rating: 50

## DRAWINGS

### Draws

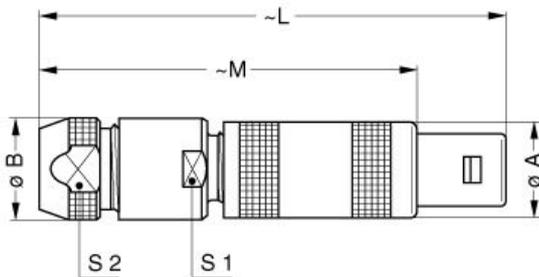

### Dimensions

	A	B	L	M	S1	S2
mm.	9	10	45.5	35.5	9	8.5
in.	0,35	0,39	1,79	1,40	0,35	0,33

## RECOMMENDED BY LEMO

### Tools

Crimp Tool: DPC.91.701.V  
 Crimp settings: AWG/Selector = 20-22-24/6-5-5  
 Positionner: DCE.91.090.BVC  
 Extractor: DCF.91.090.2LT  
 Replacement contact: FGG.0B.560.ZZC / EGG.0B.660.ZZM  
 Spanner wrench: DCD.05.005.PA065

### Cables

102 080	PVC	Grey	
120 184	PVC	Black	