




PRINT P/N & DATE CODE (SEE NOTE 4)

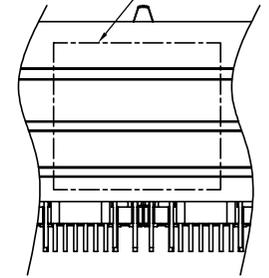

BACK VIEW

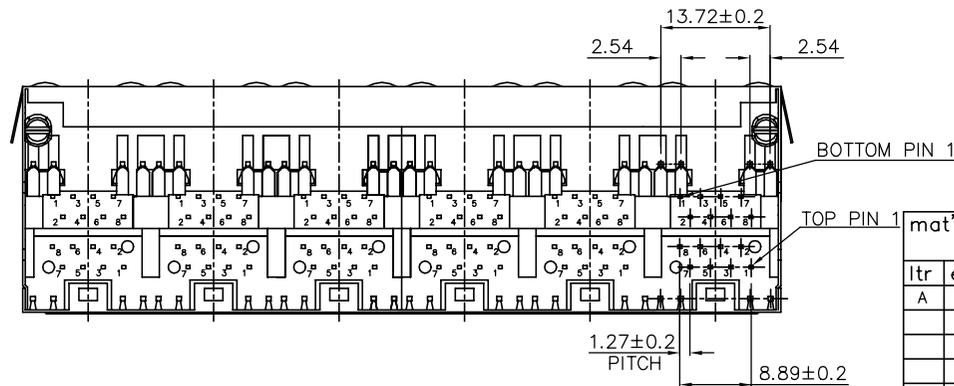

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection	product family GANGED MJACK
ltr	ecn no	dr	date	tolerances unless otherwise specified	
A		WL	11/04/11	angles	title CAT 3 MULTIPORT STACKED 2x6 WITH SHIELD, W/LED
				X.X ± 0.25	scale
				X.XX ± 0.13	
				X.XXX ± 0.05	
		dr	WENDY CHEN	05/11/11	dwg no
		enr	WENDY CHEN	05/11/11	sheet 1 of 3
		chr	WENDY CHEN	05/11/11	size
		appd	GARY HSIEH	05/11/11	10118078
					A4
sheet index	revision sheet	A	A	A	type CUSTOMER Drawing
		1	2	3	

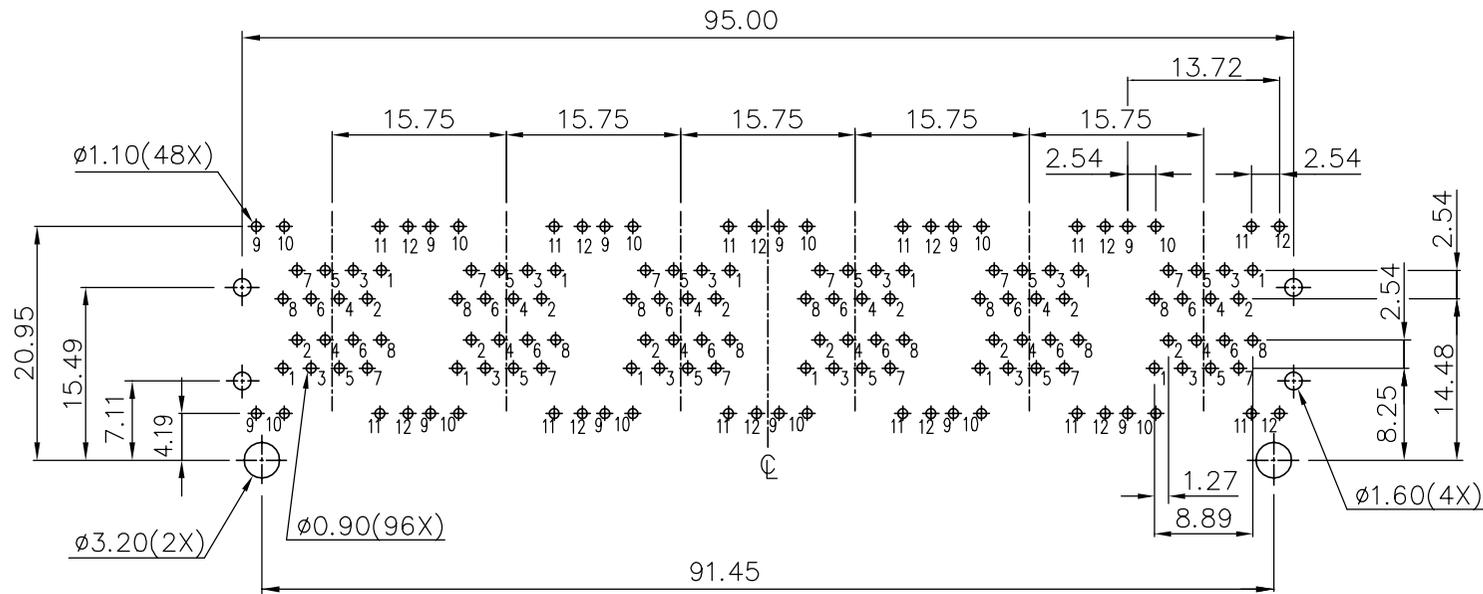

RECOMMENDED PCB LAYOUT
 RECOMMENDED PCB THICKNESS: 1.6mm
 TOLERANCE: ±0.05 (TOP VIEW)



mat'l. code		surface ASME Y14.5		tolerance ASME Y14.5		projection 		product family GANGED MJACK	
ltr	ecn no	dr	date	tolerances unless otherwise specified				title CAT 3 MULTIPORT STACKED 2x6 WITH SHIELD, W/LED	
A				angles	X.X±0.25	MM [INCH]		dwg no 10118078	
				X*±1*	X.XXX±0.05	scale		sheet 2 of 3 size A4	
				dr	WENDY CHEN 05/11/11			type CUSTOMER Drawing	
				enr	WENDY CHEN 05/11/11				
				chr	WENDY CHEN 05/11/11				
				appd	GARY HSIEH 05/11/11				
sheet index	revision sheet								

NOTE:

1. MATERIAL:
TOP HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL94V-0, COLOR: BLACK.
BOTTOM HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL94V-0, COLOR: BLACK.
CONTACTS: COPPER ALLOY.
SHIELD: COPPER ALLOY.
LED SOLDER TAIL: STEEL.
2. FINISH:
CONTACTS: 50u" MIN. NICKEL UNDER PLATED OVER ALL.
SELECTIVE GOLD PLATED ON CONTACT AREA,
1u" GOLD PLATED ON SOLDER TAIL.
LED SOLDER TAIL: 100u" MIN. BRIGHT TIN OVER
50u" NICKEL UNDER PLATED.
SHIELD: 20u" MIN. NICKEL OVER ALL.
3. LASER MARK FCI LOGO ON THE TOP OF SHIELD.
4. "DATE CODE" DESCRIPTION:


XX	XX	
		WEEK
—	—	YEAR (EX. : 10--2010)
5. PRODUCT PERFORMANCE PER SPEC. : GS-12-0990.
6. PACKING SPEC. : GS-14-2170.
7. THIS PRODUCT MEETS THE EUROPEAN UNION DIRECTIVE AS DESCRIBED IN GS-22-008.
8. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A CIRCUIT BOARD.

9. PART NUMBER DESCRIPTION:

- 10118078-X X X X X X X LF
- LEAD FREE
 - 0 : RESERVED (NOT USED)
 - PACKAGING
 - 1 : TRAY
 - OPTIONAL BACK SHIELD TAB
 - 0 : WITHOUT BACK SHIELD TAB
 - OPTIONAL RIGHT / LEFT SHIELD TAB
 - B : SHIELD TAB WITHOUT INNER SHIELD
 - OPTIONAL PANEL GROUND
 - 0 : WITHOUT PANEL GROUND
 - 3 : TOP/RIGHT/LEFT 3 SIDES WITH PANEL GROUND
 - LED COLOR
 - 1 : LED1: GREEN / LED2: YELLOW
 - 2 : LED1: YELLOW / LED2: GREEN
 - 3 : LED1: GREEN / LED2: GREEN
 - CONTACT AREA PLATING
 - 1 : 15u" GOLD PLATING
 - 2 : 30u" GOLD PLATING
 - 5 : 1u" GOLD FLASH PLATING



10118078-XX0XXXXLF
(WITHOUT PANEL GROUND)

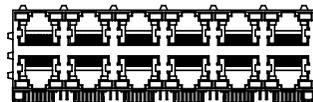

10118078-XX3XXXXLF
(3 SIDES PANEL GROUND)

mat'l. code		surface ASME Y14.5 ✓	tolerance ASME Y14.5	projection ⊕	product family GANGED MJACK
ltr	ecn no	dr	date	tolerances unless otherwise specified	title CAT 3 MULTIPOST STACKED 2x6 WITH SHIELD, W/LED
A				angles X.X±0.25 X.XX±0.13 X*±1*	
				scale MM [INCH]	dwg no 10118078 sheet 3 of 3 size A4
				dr WENDY CHEN 05/11/11 enr WENDY CHEN 05/11/11 chr WENDY CHEN 05/11/11 appd GARY HSIEH 05/11/11	
sheet index	revision sheet				type CUSTOMER Drawing