



2.92mm Series

Coaxial Adapters Up to 40GHz

◆ Features

1. Low V.S.W.R. & Insertion loss
2. Frequency range : Up to 40GHz
3. Compliant with MIL-STD-348B standard
4. RoHS compliant



◆ Varieties

● Female – Male




Product Name	HRS No.
HK-A-PJ	338-0097-0

● Female – Female

Product Name	HRS No.
HK-A-JJ	338-0098-0

● Male – Male

Product Name	HRS No.
HK-A-PP	338-0099-0

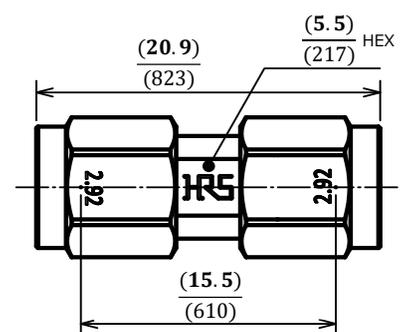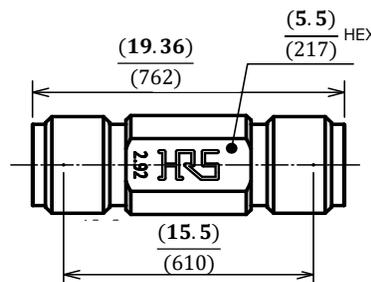
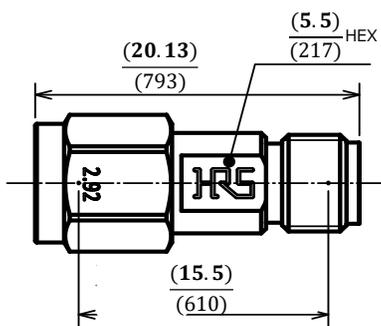


Unit: $\frac{\text{mm}}{\text{inch}}$

◆ Specifications

Contact Resistance	Center : 8mΩ Max Outer : 4mΩ Max
Withstanding Voltage	500V AC for 1 min.
Insulation Resistance	1,000MΩ Min. (500V DC)
Durability	1,000 cycles
Characteristic Impedance	50Ω
V.S.W.R.	1.1Max. : 0 – 18GHz
	1.15Max. : 18 – 26.5GHz
	1.2Max. : 26.5 – 40GHz

◆ High Frequency Performance (Typical)

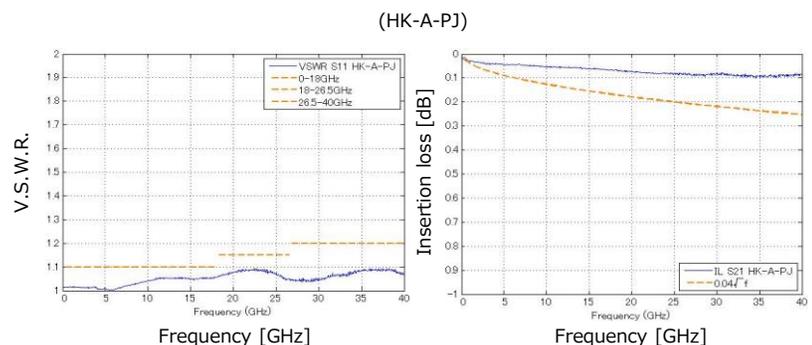

◆ Applications

Optical and wireless communication transmission equipment, measuring instruments and other high frequency devices

Specifications herein are subject to change without notice. Please contact Hirose for the latest specifications, drawings and availabilities.