

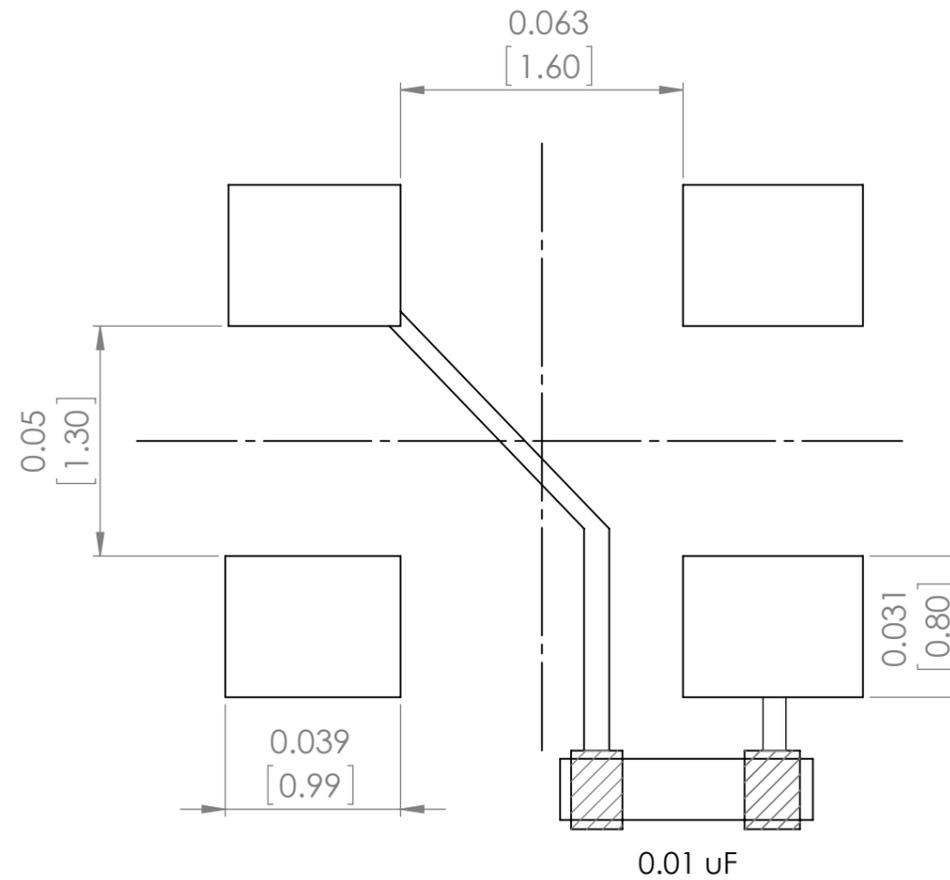
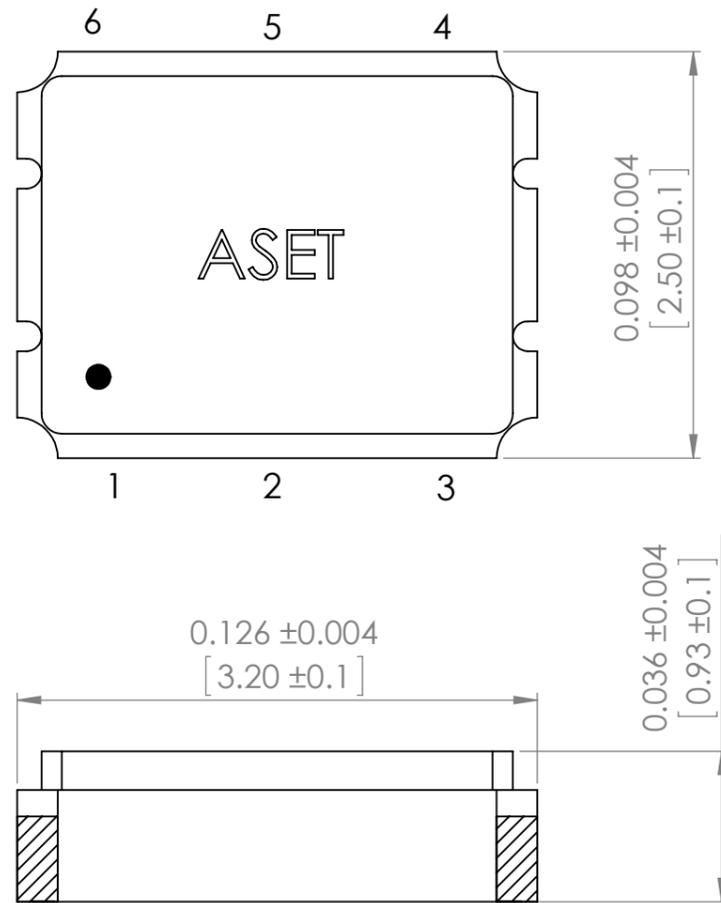


Recommended land pattern

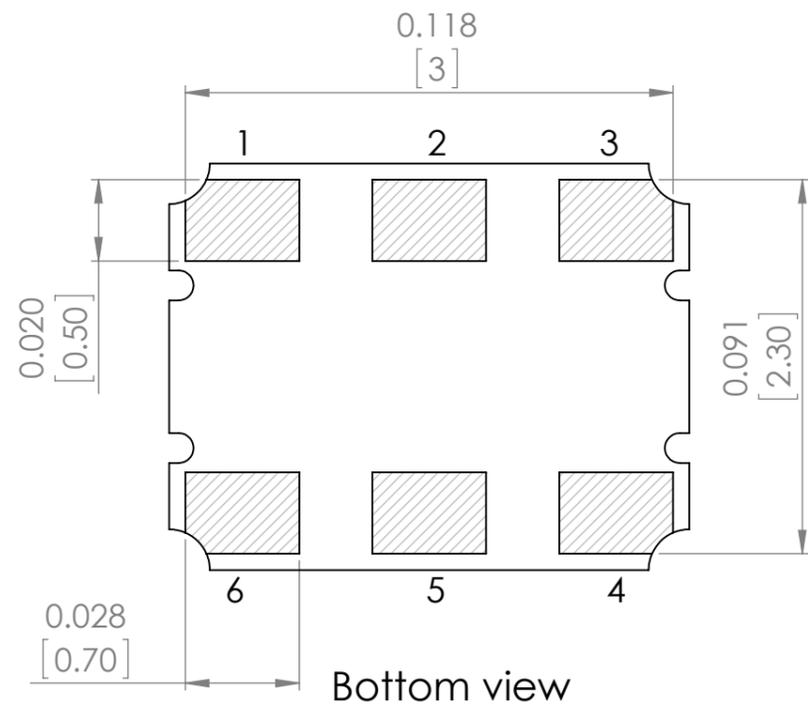


PIN	FUNCTION
1	OE
2	N.C.
3	GND
4	OUTPUT
5	N.C.
6	V _{dd}

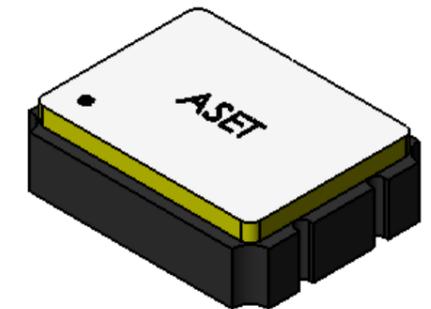

Resist layer is required on the path for the by-pass capacitor

Note 1: It is the Recommended To use approximately 0.01 µF by pass capacitor between PIN 3 and 6.

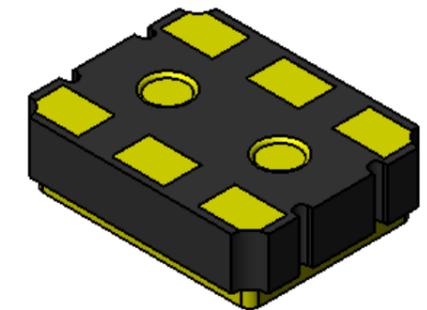

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCH(MM) SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:				FINISH:		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION	
DRAWN SAAZVAT				SIGNATURE		DATE		30332 Esperanza, Rancho Santa margarita, California 92688		-	
CHK'D XXXXXX								TITLE: TIGHT STABILITY INDUSTRIAL GRADE CRYSTAL OSCILLATOR			
APPV'D								DWG NO.		A3	
MFG								SCALE:23:1		SHEET 1 OF 1	
Q.A						MATERIAL:		ASET			
						WEIGHT:					