

MODELS:

# SRW15US / SRW15USG

## SmartRack® Wall-Mount Rack Enclosure Cabinets



15 Rack Units



200 lb.  
Load Rating



Sturdy Steel  
Construction



Locking Doors  
& Side Panels



Clear Acrylic  
Window  
(SRW15USG only)



Standard  
19" Rack Width



Convenient  
Cable Access



Adjustable  
Mounting Rails



Ventilated for  
Ample Airflow




Reversible  
Cabinet




Square/  
Threaded Hole  
Mounting

- A** Front Door  
(Lockable/Removable/Reversible.  
SRW15US door is perforated;  
SRW15USG door has a clear acrylic window.)
- B** Adjustable Mounting Rails (4)  
(Support square and threaded hole mounting options.)
- C** Side Panels (2)  
(Lockable/Removable)
- D** Hinged Wall Bracket  
(Lockable/Reversible)
- E** Cable Access Port Covers (4)  
(Removable)
- F** Ventilation Fan Ports (4)  
(Support optional SRFANWM fan kit.)
- G** Keys (2)

Also Includes: Owner's manual, mounting plate screws (3), cabinet ground screw, pre-installed front door ground wire and rackmount equipment mounting hardware (20 cage nuts, 20 M6 x 16mm mounting screws, 20 #12-24 x 5/8" mounting screws, 20 nylon cup washers)

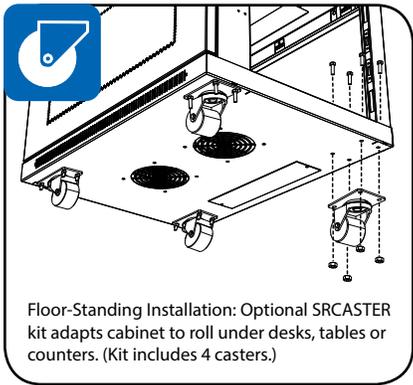

Floor-Standing Installation: Optional SRCASTER kit adapts cabinet to roll under desks, tables or counters. (Kit includes 4 casters.)

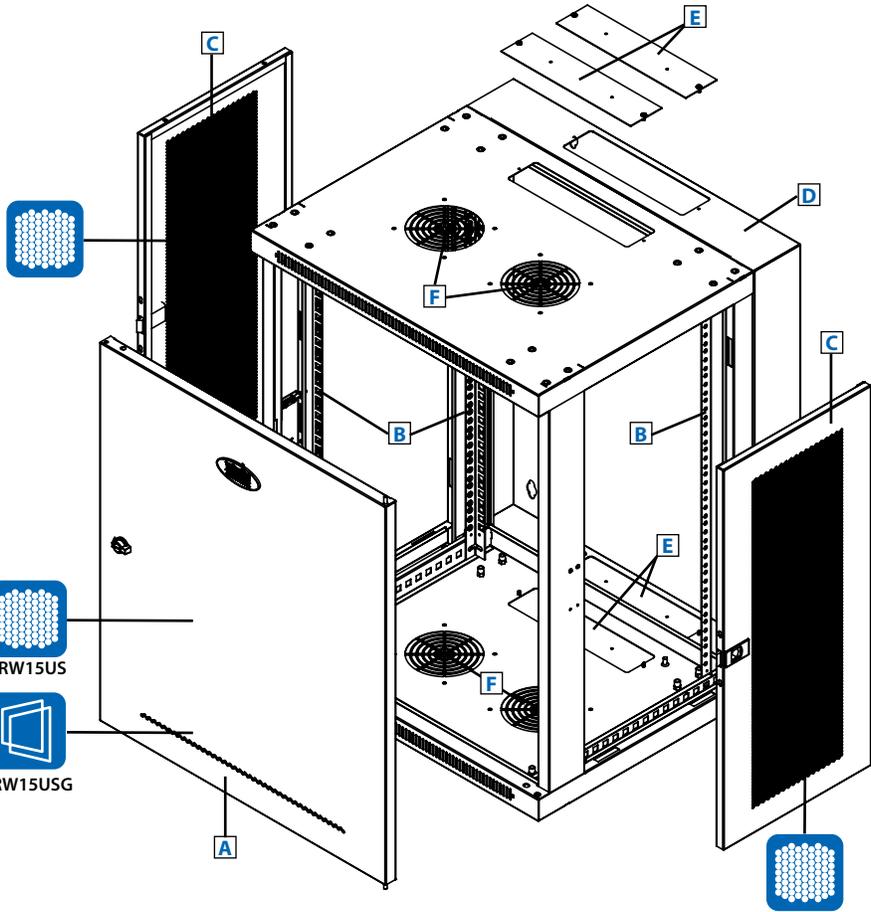

- Wall-mount enclosures provide convenient, locking storage for rackmount IT devices and other equipment that should be off the floor, out of the way and secure
- The cabinet is fully reversible, allowing installers to change door hinges from left to right by simply rotating the unit 180 degrees before mounting
- Hinged wall bracket allows cabinet to swing away from the wall for convenient access to equipment and cabling.

**SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS**



1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234  
www.tripplite.com

### Specifications

Models	SRW15US / SRW15USG
Rack Spaces	15U
Equipment Mounting Depth	Up to 20.5 in. (520.7 mm)
Load Rating*	200 lb. (91 kg)
Unit Dimensions [H x W x D]	30.33 x 23.62 x 21.57 in. (770 x 600 x 548 mm)
Shipping Dimensions [H x W x D]	33.07 x 26.38 x 24.1 in. (840 x 670 x 612 mm)
Unit Weight	88.2 lb. (40 kg)
Shipping Weight	96 lb. (43.5 kg)
Standards	Tested to UL/CSA 60950-1, IEC 60297-3-100, RoHS, NOM (Mexico), EIA/ECA-310-E, GOST; PCI Compliant, IP20 Protection Rating

\* The load rating includes the combined weight of the unit and installed equipment. The unit must be mounted to a stable surface with user-supplied anchors capable of bearing the full load.







SRW15US




SRW15USG

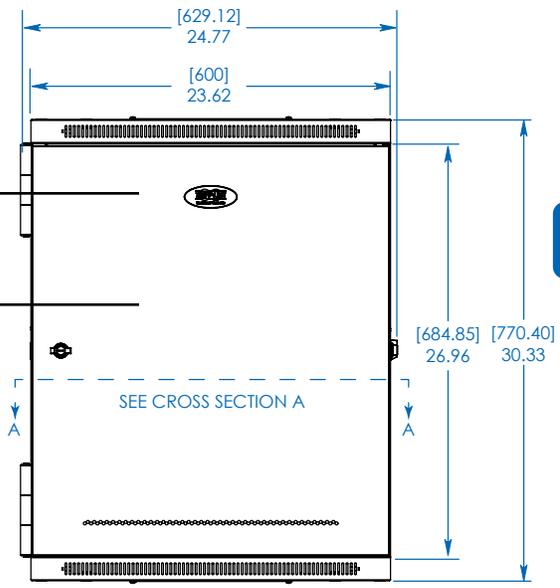


FRONT VIEW

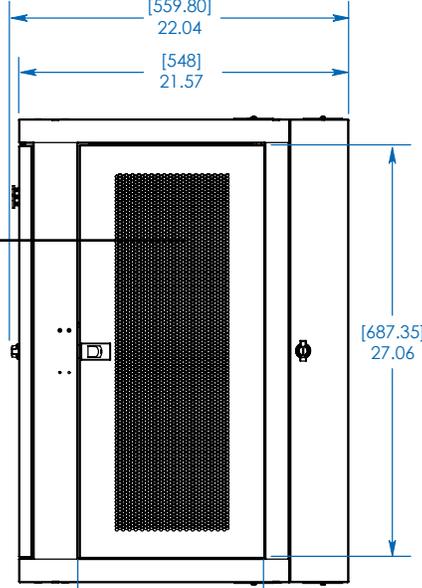


SIDE VIEW

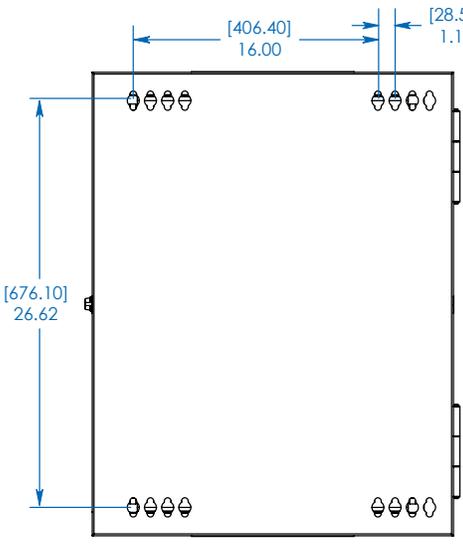

REAR VIEW

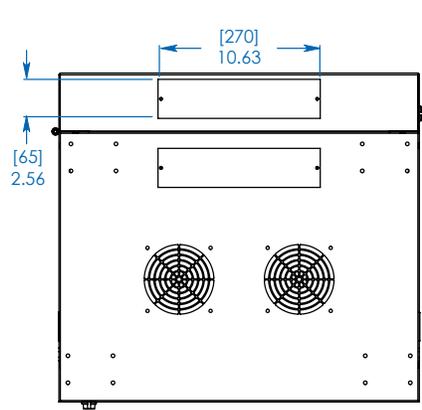

TOP/BOTTOM VIEW

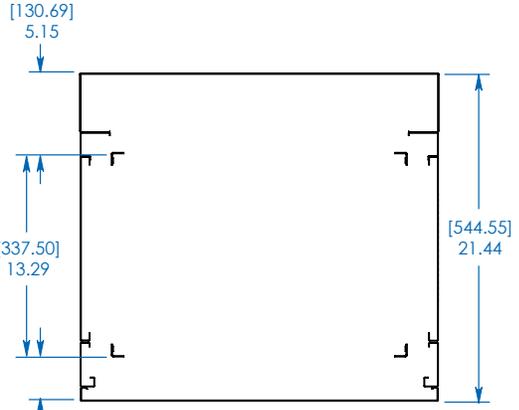


CROSS SECTION A  
USABLE MOUNTING DEPTH

MODELS:  
**SRW15US / SRW15USG**



Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

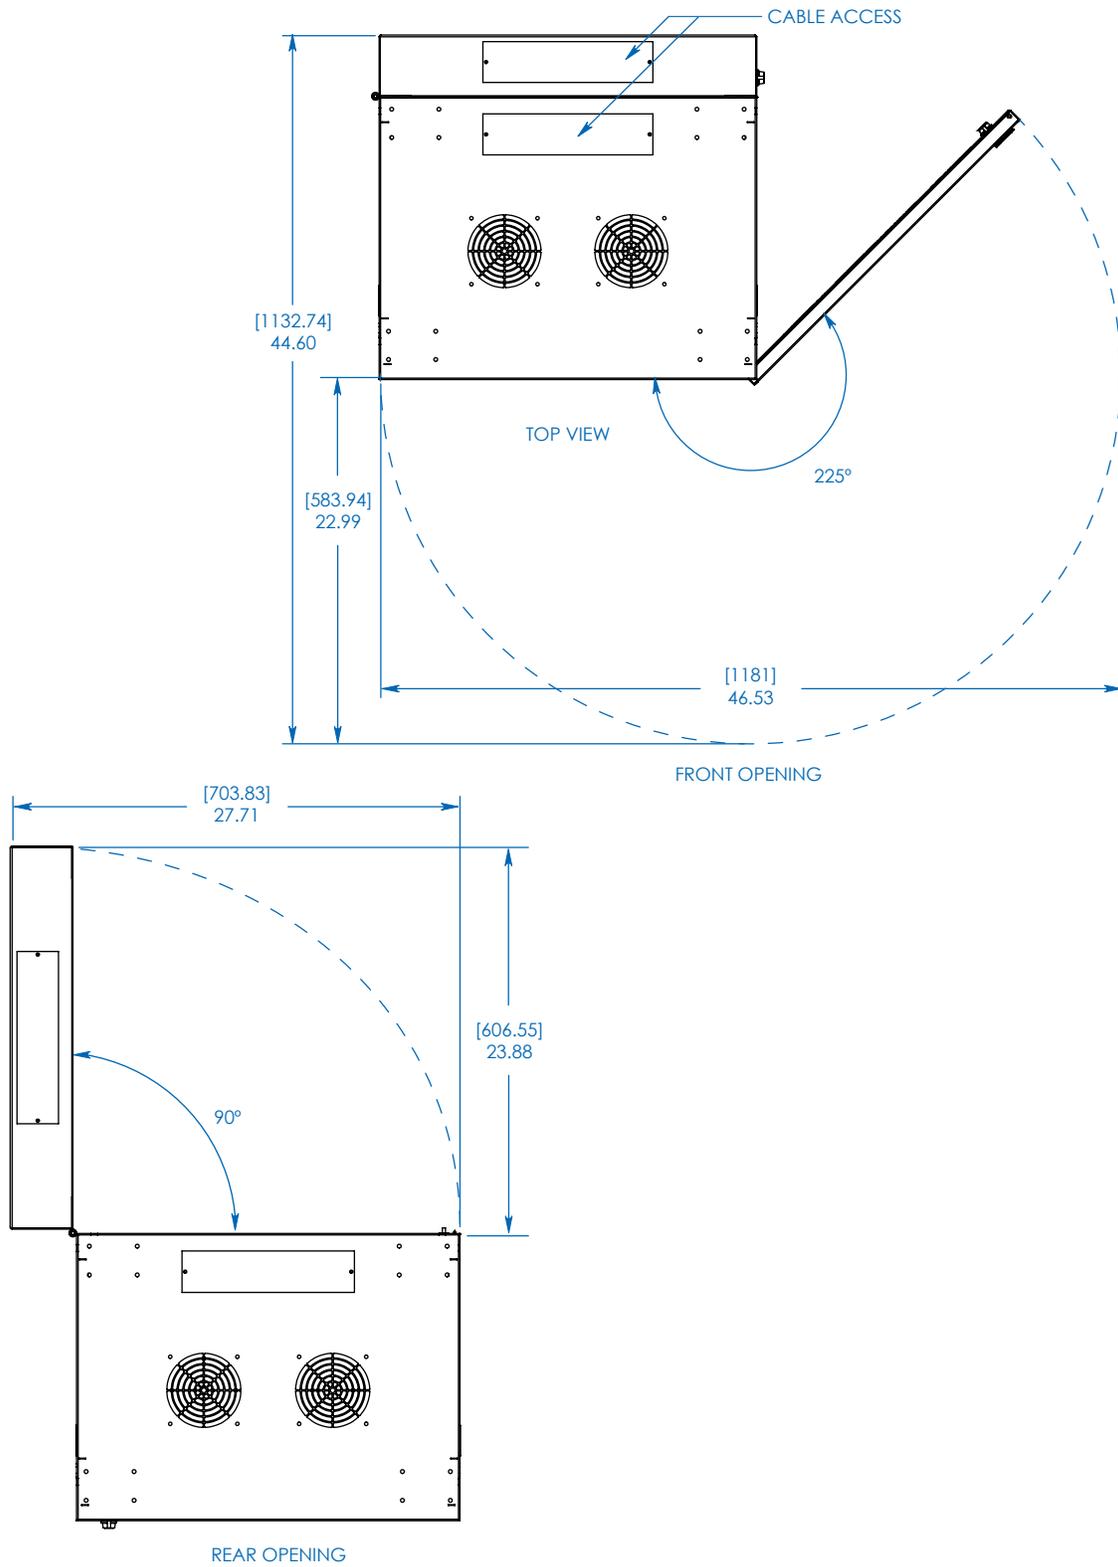

MODELS:  
**SRW15US / SRW15USG**



1111 W. 35th Street  
 Chicago, IL 60609 USA  
 773.869.1234  
 www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.