

Housing - HC-D 25-TFL-72/O1STM25S - 1645273

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON sleeve housing D25, for single locking latch, height 72 mm, without support 1x M25, lateral conductor exit

The illustration shows the version
HC-D 25-TFL-72/O1STM25G

Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 913106
GTIN	4017918913106
Weight per Piece (excluding packing)	201.740 g
Custom tariff number	85389099
Country of origin	Germany

Technical data

Dimensions

Height	72 mm
Width	36 mm
Length	79.5 mm

Ambient conditions

Degree of protection of housing (IP)	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

General

Note	For contact inserts HC-D25, A16
Size	D25

Housing - HC-D 25-TFL-72/O1STM25S - 1645273

Technical data

General


Housing type	Sleeve housing
Locking type	for single locking latch
No. of cable outlets	1
Cable exit	lateral
Screw connection	none
Type of the screw connection	1x M25
Housing material	Aluminum die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

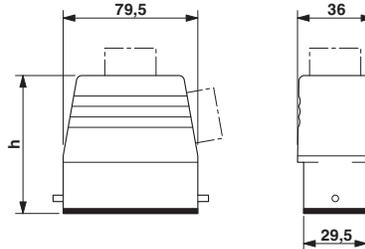

Approvals

Approvals

Approvals

EAC / GL

Ex Approvals

Approval details

EAC 7500651.22.01.00246

Housing - HC-D 25-TFL-72/O1STM25S - 1645273

Approvals

GL <http://www.gl-group.com/newbuilding/approvals/index.html> 6196614
