PatchRunner ™ High Capacity Horizontal Cable Managers

specifications

The high capacity horizontal cable managers shall be a front only design capable of managing copper and fiber cables on any 19" EIA cabinet or rack. These managers shall be constructed with a steel frame and molded plastic fingers. The manager shall retain cables in a horizontal pathway while providing .350" (9mm) bend radii between each finger and at each end finger. The high capacity managers shall have a telescoping projection from the rack mounting face of 4.4" (112mm) to 7.6" (193mm) and an open back for pass through from the front to the back of the rack. A metal, hinged cover that opens 110 degrees either up or down allows full access to the cable pathway and shall be standard on these managers. These managers will be capable of being installed on top of each other in a rack without the opening and the closing of the covers interfering with the other manager.



technical information

Part Number	RU	Height in (mm)	Width in (mm)	Depth* in (mm)
PEHF2	2	3.5 (89)	18.9 (480)	9.8 (250)
PEHF3	3	5.2 (133)	18.9 (480)	9.8 (250)
PEHF4	4	7.0 (177)	18.9 (480)	9.8 (250)

^{*}Projection from rack mounting face can vary from 4.4" (112mm) to 7.6" (193mm).

key features and benefits

Deep channel opening	Manage more cables in less RU spaces	
Telescoping projection	Prevents capacity reduction when transitioning from the vertical manager to the horizontal by aligning the fingers	
Finger spacing	Wide front finger openings easily accommodate Category 6A and Category 6 copper cables speeding installation and reducing maintenance costs	
Dual hinged cover	Metal door opens 110 degrees to the top or bottom to provide complete access to the horizontal pathway without having to remove the cover	
Full radius finger with uniform cross-section	Maintains cable radii and allows cable retainer to be used for bundle retention or segregation	

applications

Panduit® PatchRunner™ High Capacity
Horizontal Cable Managers provide an efficient
way to manage high performance copper,
fiber optic, or coaxial cables on any 19" rack
or cabinet. Telescoping projection allows
alignment with numerous vertical managers
to maximize cable capacity. Fixed bend
radius fingers organize and protect patch
cords as they exit patch panels and as they
transition into the vertical pathway. All of

these features combine to provide the user with a horizontal cable management solution that simplifies cable routing in a finished professional appearance. When used with Panduit patch panels, patch cords, vertical cable managers, and racks, the user receives a total system that satisfies functional and aesthetic requirements for data centers and telecommunications rooms.



SPECIFICATION SHEET

PatchRunner™ High Capacity Horizontal Cable Managers

2 RU manager front only: 3 RU manager

PEHF2

front only: 4 RU manager front only: PEHF3 PEHF4

PatchRunner" High Capacity Vertical Cable Managers for 19" and 23" Wide Racks – 7 Foot

Dual-Sided

6" wide: PEV6[^] 8" wide: PEV8^ 10" wide: PEV10^ 12" wide: PEV12^ Single Sided 6" wide: PEVF6[^] 8" wide: PEVF8^ 10" wide: PEVF10[^] 12" wide: PEVF12[^]

PatchRunner[™] 2 Vertical Cable Managers with Doors – 7 Foot

6"W, front and rear: 6"W, front only:

PR2VD06^

8"W, front

PR2VFD06[^]

and rear: 8"W, front only: 10"W, front PR2VD08^ PR2VFD08^

and rear: 10"W, front only: PR2VD10^ PR2VFD10^

12"W, front and rear: 12"W, front only:

PR2VD12^ PR2VFD12^

Panduit Racks

2 post rack 7' with threaded rails, 3" deep:

R2P^

2 post rack 7' with threaded rails, 6" deep:

R2P6S^

4 post racks 7' 30" depth with #12-24 threaded rails:

R4P*^

4 post racks 7' 23" depth with #12-24 threaded rails:

R4P23*^

4 post racks 7' 36" depth with #12-24 threaded rails: 4 post racks 7' 42"

R4P36*^

depth with #12-24 threaded rails:

R4P42*^

Accessory


Snap-on finger cable retainer:

WR5E-X

*Add "CN" for cage nut rails

^Add suffix 96 to the end of the part
number for 8' part numbers.

PatchRunner™ High Capacity Horizontal Cable Managers

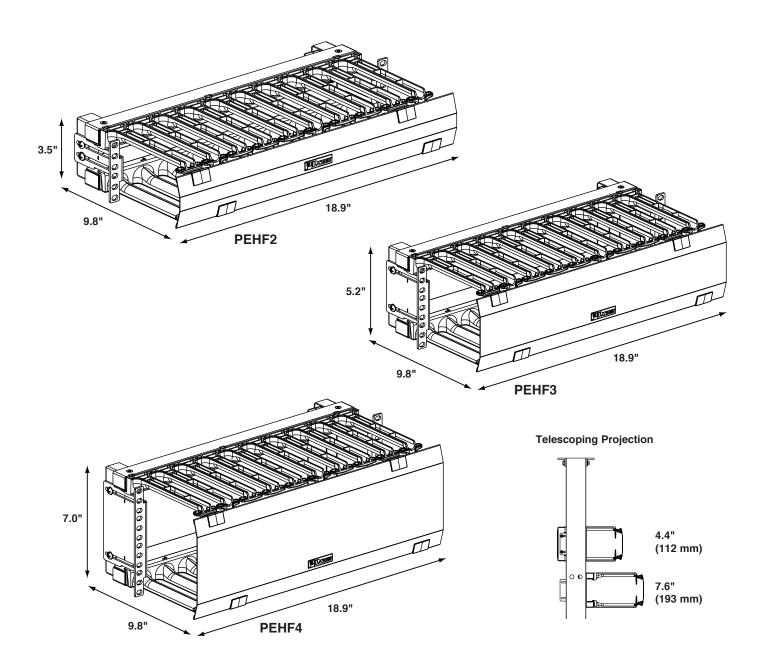

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA Phone: 800.777.3300 PANDUIT EUROPE LTD. London, UK cs-emea@panduit.com Phone: 44.20.8601.7200 PANDUIT SINGAPORE PTE. LTD. Republic of Singapore cs-ap@panduit.com Phone: 65.6305.7575

PANDUIT JAPAN Tokyo, Japan cs-japan@panduit.com Phone: 81.3.6863.6000 PANDUIT LATIN AMERICA Guadalajara, Mexico cs-la@panduit.com Phone: 52.33.3777.6000 PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia cs-aus@panduit.com Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty





Contact Customer Service by email: cs@panduit.com or by phone: 800.777.3300 and reference RKSP165



