

MODEL:

# PDUMH15HVATNET

## Single-Phase Switched Rack-Mount ATS PDU



200-240V  
Single-Phase  
Input/Output



High Voltage  
Input/Output



Automatic  
Transfer  
Switch



10 Switched  
Outlets



2-2.4kW  
Load Capacity



Network  
Interface



1U Horizontal  
Rack-Mount



2 C14 Inlets

**A** C13 Switched Outlets (x10)

**B** C14 Inlets (x2)

**C** 12 ft. Detachable C13 to C14 Input Power Cord (x2)

**D** Rack-Mounting Brackets (Removable)

**E** Factory Configuration Port

**F** Grounding Lug

**G** Network Interface

**H** RJ45 Ethernet Jack


**I** Manual Configuration Port

**J** Environmental Monitoring Port

**K** SNMP Reset Button


**L** Digital Load Meter

REAR VIEW

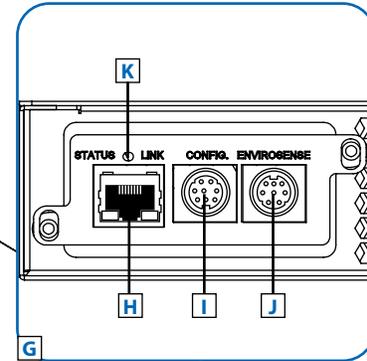

Also Includes:  
Owner's manual,  
vertical mounting  
brackets (2), C14 plug  
lock inserts (10), configuration  
cable and mounting hardware.

FRONT VIEW



- Distributes 2-2.4kW single-phase redundant power for devices with non-redundant power supply configurations
- Automatic transfer switching within 2-5 ms
- Digital load meter for real-time output current monitoring
- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

**SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS**




1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234  
www.tripplite.com




### Specifications

Model	PDUMH15HVATNET
Voltage	200-240V (Single-Phase Input/Output)
Frequency	50 / 60 Hz
Load Capacity	2-2.4kW
Input Cord Inlets	C14 (x2)
Input Cord Lengths	12 ft. [3.6 m] (x2)
Outlets	10 C13 (Switched)
Primary Mounting Option	1U Horizontal
Unit Weight & Dimensions	10.41 lb / 1.71 x 17.33 x 14.45 (HxWxD in inches) 4.72 kg / 43.5 x 440 x 367 (HxWxD in mm)
Standards	Tested to CE, UL / CSA 60950-1 (USA, Canada), FCC Class A (Emissions), NOM (Mexico); RoHS, EAC and TAA Compliant

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

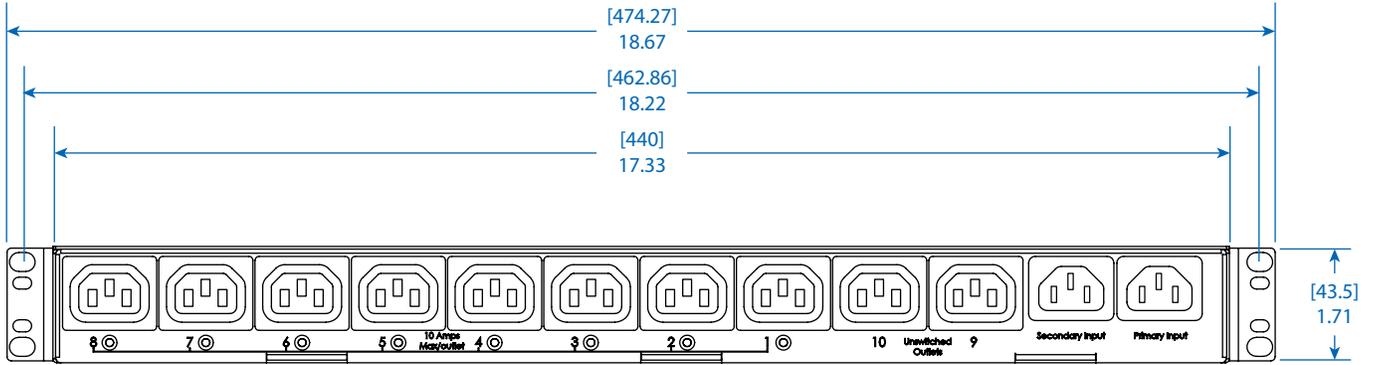

FRONT VIEW

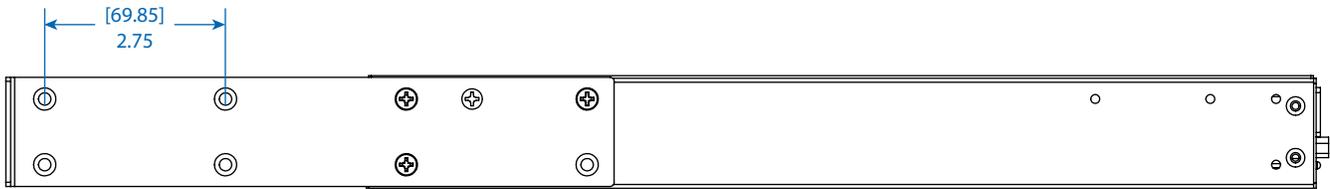

SIDE VIEW



REAR VIEW

Dimensions: [mm] INCHES


Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:  
**PDUMH15HVATNET**



1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234

[www.tripplite.com](http://www.tripplite.com)

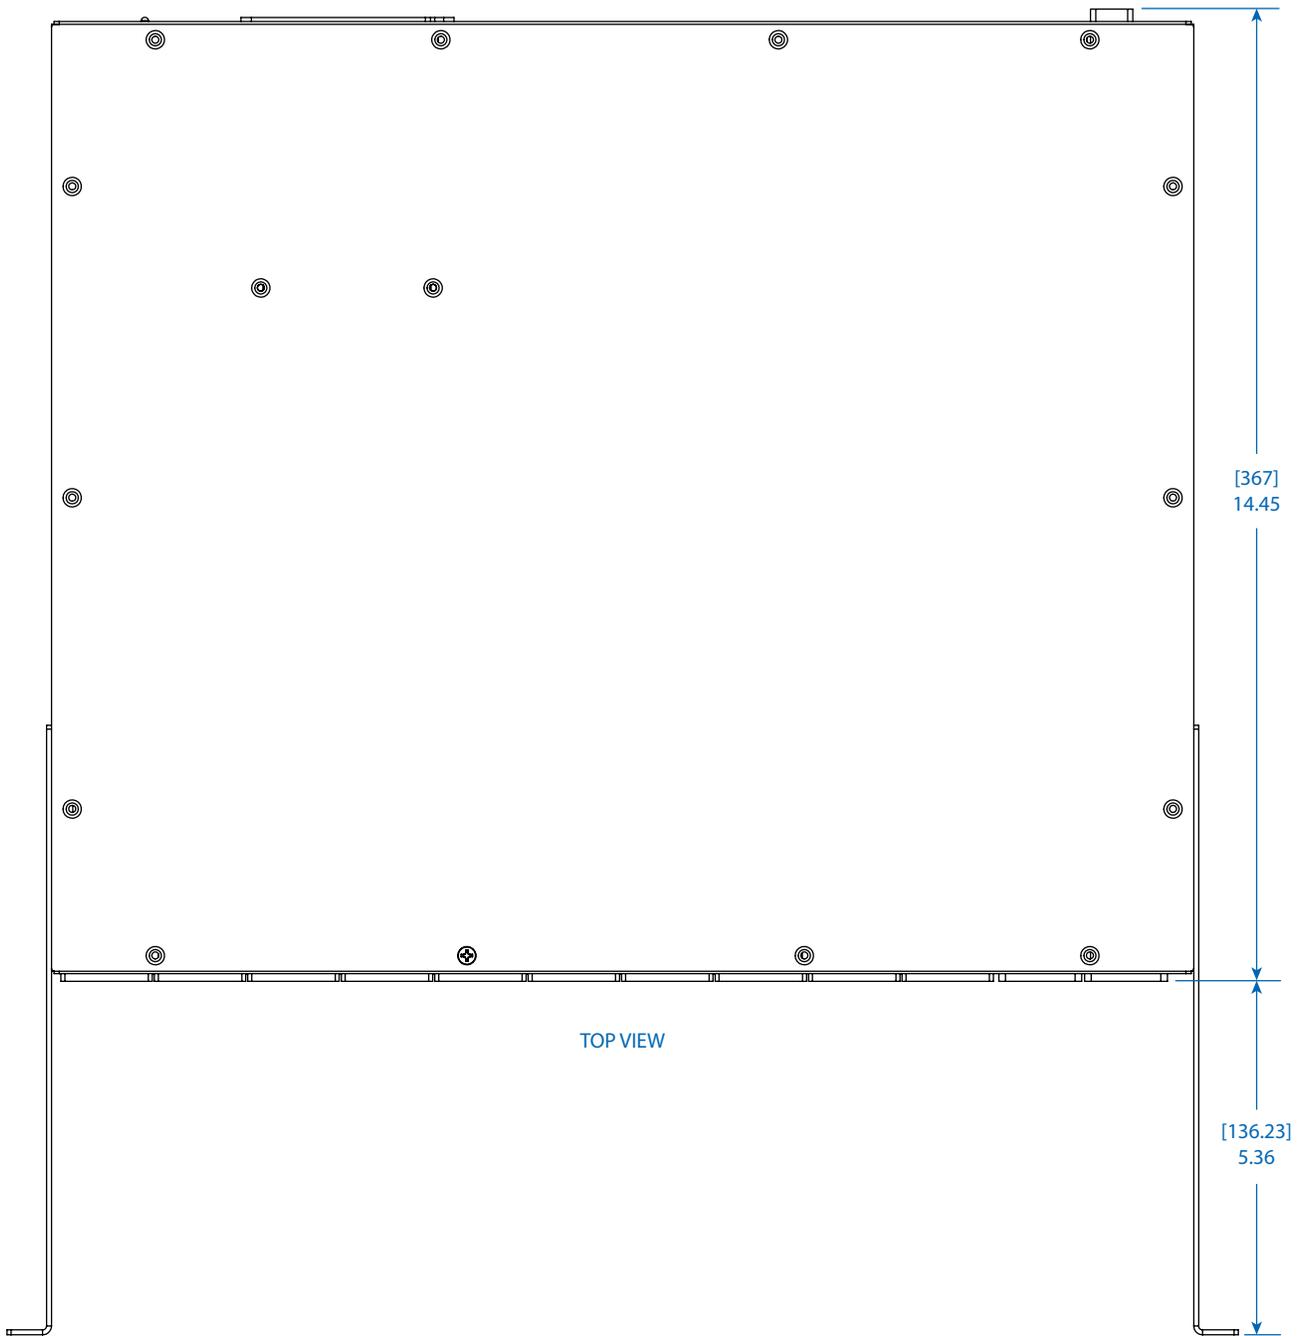

TOP VIEW

[367]  
14.45

[136.23]  
5.36

MODEL:  
**PDUMH15HVATNET**



1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.