MODEL:

## SR18UB

## SmartRack® Premium Rack Enclosure











EIA/ECA 310-E





Adjustable



Airflow Exceeds



Square Hole



18 Rack Units 1000 lb. Stationary **Load Rating** 

1000 lb. Rolling **Load Rating** 



Heavy-Duty Casters



& Side Panels

Standard 19-inch Equipment

Mounting Slots

Rails with **Easy-View Depth Index** 

Server OEM Requirements

Integrated **Baying Tabs** 



A Locking/Reversible Front Door

**B** Locking/Reversible Back Door

C Horizontal Rails

**D** Vertical Mounting Rails

**E** Vents

F Cable Access Panel


**G** Locking/Removable Side Panels


**H** Heavy-Duty Casters

■ Heavy-Duty Levelers

■ Keys (For doors and side panels)

Also Includes: Owner's manual and rackmount equipment mounting hardware (42 cage nuts, 42 mounting screws, 42 nylon cup washers)

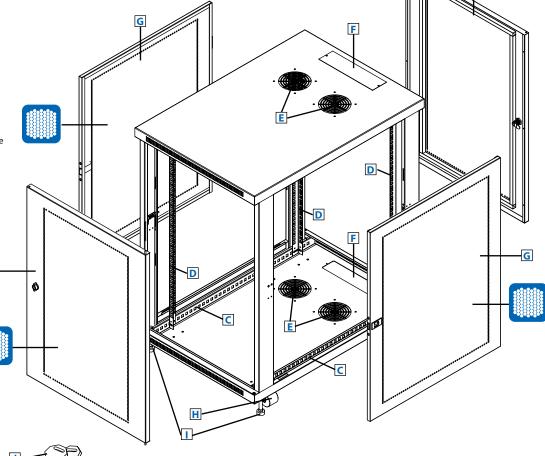



• Ideal for rack-mount server, network and telecom applications



A










## SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS




1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

Specifications $\smile$	RoHS
Model	SR18UB
Rack Spaces	18U
Stationary Load Rating	1000 lb. (454 kg)
Rolling Load Rating	1000 lb. (454 kg)
Unit Dimensions [H x W x D]	35.6 x 23.62 x 33.5 in. (904.2 x 600.2 x 850.9 mm)
Shipping Dimensions [H x W x D]	41.61 x 25.6 x 35.03 in. (1056.9 x 650.2 x 889.8 mm)
Unit Weight / Shipping Weight	105 lb. (47.63 kg) / 123 lb. (55.79 kg)
Standards	Tested to UL 60950, EIA-310-E, NOM and RoHS standards

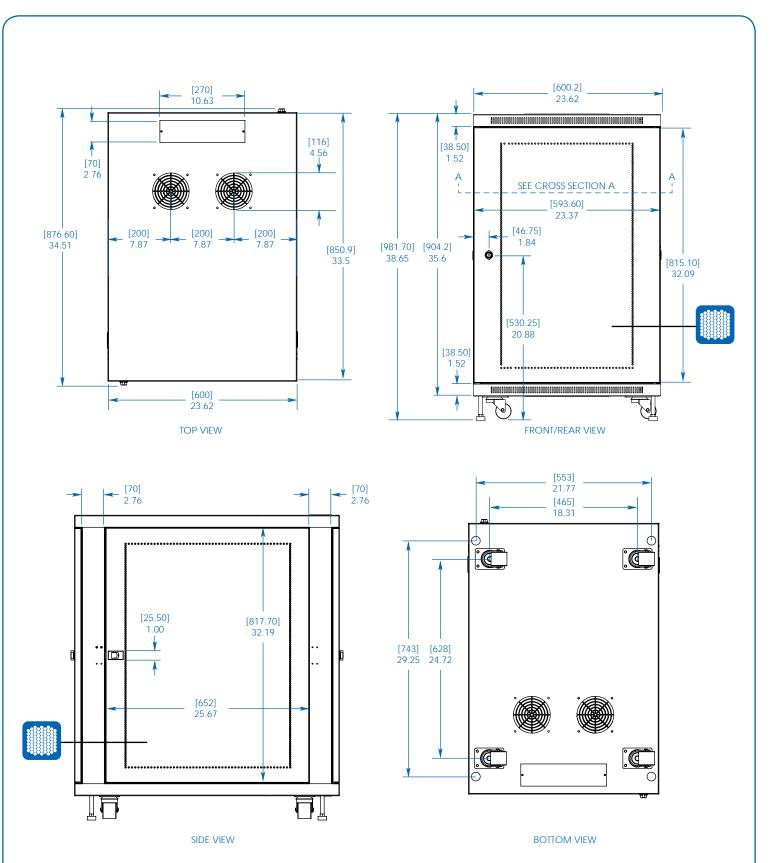



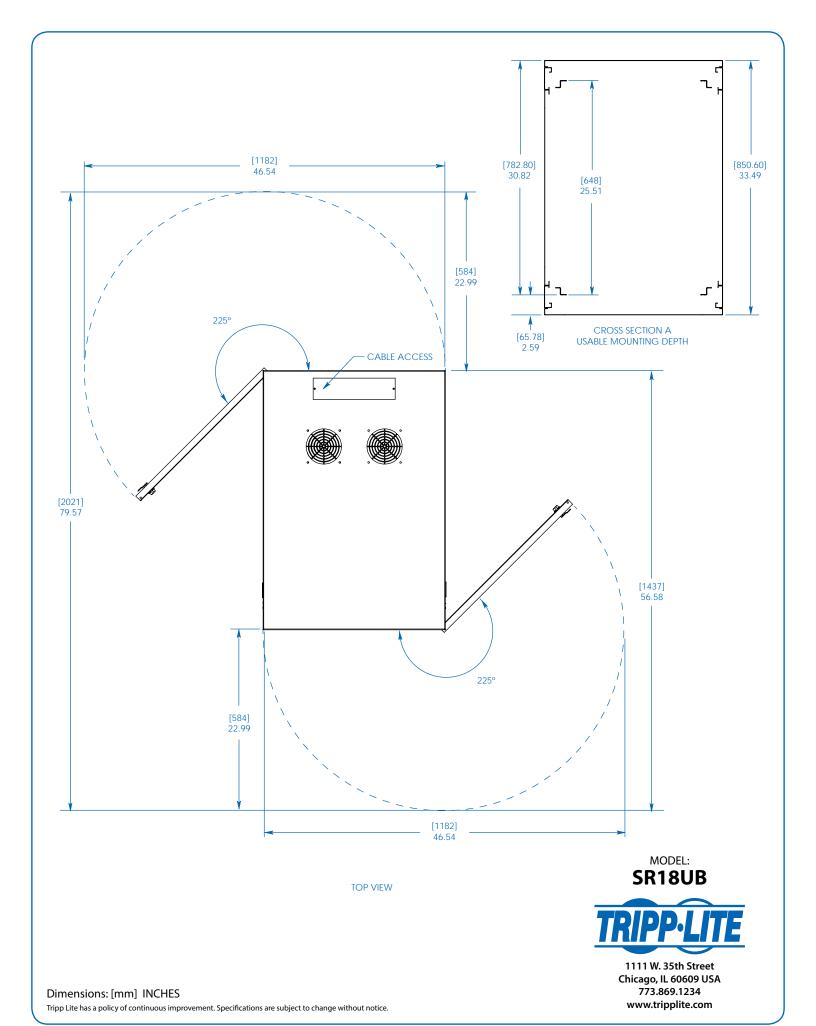

Copyright © 2017 Tripp Lite.