### **SD04H1BD** Details PDF





Image may be representation. See specifications for product details.

## SD04H1BD

Part Number:		
Manufacturer/Brand:		
Product description		
Datasheets:		
RoHs Status		
Stock Condition		
Ship From		
Shipment Way		

# C&K SWITCH SLIDE DIP SPST 100MA 25V SD04H1BD.pdf Lead free / RoHS Compliant 58894 pcs stock Hong Kong DHL/Fedex/TNT/UPS/EMS

SD04H1BD

### **REQUEST FOR QUOTATION**


### Specifications of SD04H1BD

PART NUMBER5004H180NANUFACINEERCakPARTON LIDER PSF TLOWA 25YLIDER PRE STATUS PORTS STATUSKender (Antis CompliantQUANITY AVAILABLES004H180.pdfQUANITY AVAILABLES004H180.pdfVOLTAGE RATINGS004H180.pdfVOLTAGE RATINGS004H180.pdfVOLTAGE RATINGS004H180.pdfVOLTAGE RATINGS004H180.pdfVOLTAGE RATINGS004H180.pdfVOLTAGE RATINGS004H180.pdfVOLTAGE RATINGS004H180.pdfVOLTAGE RATINGS004H180.pdfVOLTAGE RATINGS004H180.pdfPREVIDENTIAL STATUSS004H180.pdfVOLTAGE RATINGS004H180.pdfVOLTAGE RATINGS004H180.pdfVOLTAGE RATINGS004H180.pdfPREVIDENTIAL STATUSS004H180.pdfVOLTAGE RATING STATUSS004H180.pdfVOLTAGE RATING STATUSS004H180.pdfVOLTAGE TRANSS004H180.pdfVOLTAGE TRANSS004H180.pdfVOL	_		
DESCRIPTIONSWITCH SLIDE DIP SPST 100/HA 25VLEAD FREE STATUS / ROHS STATUSEdd free / RoHS CompliantQUANTITY AVAILABLES8894 pssDATA SHEETS000HILBD.pdfWASHABLENoVOLTAGE RATINGPC PinSTREISS0PTCHOn (2.5Hm), FullPACKAGINGTubePACKAGINGTubeRATARSG100(2.5Hm), FullPARTARSS0OTHER NAMESVID (2.5Hm), FullPARTARSS0OTHER NAMESS0OTHER STATUS / ROHES STATUS <td>PART NUMBER</td> <td>SD04H1BD</td>	PART NUMBER	SD04H1BD	
LEab FREE STATUS / ROHES STATUS         Lead free / RoHS Compliant           QUANTTY AVAILABLE         S894 pcs           DATA SHEET         No           VOLTAGE RATING         SVDC           STRENS         SO           STRENS         SO           PTCH         OLIOD' (2.54mm), Full           PACKAGING         Tube           SOLISS         SOURD' (1.5000/SQL)           OTHER NAMES         '(1.5000/SQL)           OTHER NAMES         '(1.5000/SQL)           OPERATING TEMPERATURE         40°C ~ 80°C           NUMBER OF POSITIONS         '(1.5000/SQL)           NUMER OF POSITIONS         '(1.5000/SQL)           NUMER OF POSITIONS         '(1.5000/SQL)           NUMER OF POSITIONS         '(1.6000/SQL)           NUMER OF POSITIONS         '(1.6000/SQL)           NOUTING TYPE         '(1.6000/SQL)           NUMER OF POSITIONS         '(1.6000/SQL)           NOUTING TYPE         '(1.6000/SQL)           NOUTING TYPE         '(1.6000/SQL)           ELETROL LIFE         '(2.000 Cycles           ELETROL LIFE         '(2.000 Cycles           ELETROL LIFE         '(2.000 Cycles           ELETROL LIFE         '(2.000 Cycles           CONTACT MAT	MANUFACTURER	C&K	
QUANTTY AVAILABLE5884 pcsDATA SHEETNoVALTA SHEETNoVOLTAGE RATING25VDCTERMINATION STYLEDP PnSERLESSDPTCH0.10° (2.5mm), FullPACKAGINGTubeOTHER MAMESSOUGHINBD/NOOTHER MAMES- MOC 0.5MM/N SUGASSSSOTHER MAMES- MOC 0.5MM/N SUGASSSSOTHER MAMES- MOC 0.5MM/N SUGASSSOTHER MAMES- MOC 0.5MM/N SUGASSSOTHER MAMES- MOC 0.5MM/N SUGASSOTHER MAMES- MOC 0.5MM/N SUGASSMUMUTING TEMPERATURE- MOC 0.5MM/N SUGASSMUMUTING TEMPERATURE- MOC 0.5MM/N SUGASSMUMUTING TEMPERATUS / ROHS STATUS- MOC 0.5MM/N SUGASSMUMUTING TEMPERATUS / ROHS STATUS- MOC 0.5MM/N SUGASSFEATURES- MOC 0.5MM/N SUGASSFEATURES- MOC 0.5MM/N SUGASSCURRENT RATUS- MOC 0.5MM/N SUGASSCURRENT RATUS- MOC 0.5MM/N SUGASSCURRENT RATUS- MOC 0.5MM/N SUGASSCURRENT RATUS- MOC 0.5MM/N SUGASSCURATURATURAL- MOC 0.5MM/N SUGASSCURRENT RATUS- MOC 0.5MM/N SUGASSCURATURALE- MOC 0.5MM/N SUGASS <td>DESCRIPTION</td> <td>SWITCH SLIDE DIP SPST 100MA 25V</td>	DESCRIPTION	SWITCH SLIDE DIP SPST 100MA 25V	
Data selertS04H18D.pdfWASHABLENoVOLTAGE RATINGSDVCTERMINATION STYLEC PinSERIESSDPITCH0.100 (2.54mm), FullPACKAGINGTubeOrtHR NAMESSCOUNTUBE CONVERTINGOTHER NAMES40°C ~ 85°CNUMBER OF POSITIONS4MOUTING TYPE100 (2.54mm), FullMOUTING TYPE40°C ~ 85°CNUMBER OF POSITIONS4MOUTING TYPE100 CyclesMOUTING TYPE0.90°C (2.54mm), ConvertingMOUTING TYPE0.90°C (2.54mm), ConvertingMOUTING TYPE0.90°C (2.54mm), ConvertingMOUTING TYPE101 MIREO)MICHANICAL LIFE2,000 CyclesLENGTH0.91°C (1.63mm)LEAD RE STATUS / ROHS STATUS0.91°C (1.63mm)LEAT REAL LIFE2.000 CyclesLEATRICAL LIFE2.000 CyclesLEATRICAL LIFE2.000 CyclesCOTTACT HATERIAL0.91°L (1.60mm)CONTACT FINISH0.91°L (1.60mm)CONTACT FINISH6.04CONTACT FINISH6.04CONTACT FINISH6.04CONTACT FINISH6.04CONTACT FINISH6.04CONTACT FINISH6.04CONTACT FINISH6.04CONTACT FINISH6.04CONTACT FINISH6.04 </td <td>LEAD FREE STATUS / ROHS STATUS</td> <td>Lead free / RoHS Compliant</td>	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant	
NARIABLENoVOLTAGE PATINGSPDCTERMINATION STYLEPC PinSERIESSDPITCH0.1007 (2.54mm), FullPACKAGINGTUPRACKAGINGSSOCof THER NAMESSSOCOTHER NAMESSSOCOTHER NAMES4.00 < 85°C	QUANTITY AVAILABLE	58894 pcs	
VOLTAGE RATINGSVDCTERNINATION STYLECP InSERIESS0PTCH0.00° (2.54mm, FullPACAGINGTuleACKAGINGTuleorther NAMES	DATA SHEET	Def SD04H1BD.pdf	
TERNINATION STYLEPC PinSTRESSDPTCH0.00° (2.54mm), FullPACKAGINGTwboftHR NAMESSD0'HIBO'ADDG SD0	WASHABLE	No	
SRIESSDPTCH1.0° (2.54m), FullPACKAGINGVoPACKAGINGVoorther NAMESSolisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/Solisby/So	VOLTAGE RATING	25VDC	
PTCH0.00° (2.54mm, FullPACKAGINGVoearchanness2015DV3QE SV04HBBorther NAMES2015DV3QE SV04HBD-NDorther NAMES- 40< < 55°C	TERMINATION STYLE	PC Pin	
PACKAGINGTubeorther NAMESTUDISDYGE SUD4HIBD-NDorter NAMESSUD4HIBD-NDorterATING TEMPERATURE-40°C ~ 85°CNUMBER OF POSITIONS4MOUNTING TYPETrough HoleMOUNTING TYPE(Iulimited)MOLTING TALE.000 CyclesLENGTH.045°C AS0°LLENGTH.0107 (AS00)LENGTH.0107 (AS00)HEIGHT ABOVE BOARD.0107 (AS00)FLATURES.0107 (AS00)ELECTRICAL LIFE.0107 (AS00)LECTRICAL LIFE.0107 (AS00)LECTRICAL LIFE.0107 (AS00)LECTRICAL LIFE.0107 (AS00)ELECTRICAL LIFE.0107 (AS00)LIGHT ABOVE BOARD.0107 (AS00)ELECTRICAL LIFE.0107 (AS00)CURRENT RATING.0107 (AS00)CURRENT RATING.0107 (AS00)CURTACT MATERIAL.000 (As00)CONTACT FINISH.0107 (AS00)CONTACT FINISH.0107 (AS00)CURACT FINISH.0107 (AS00)CURACT FINISH.0107 (AS00)CONTACT FINISH.0107 (AS00) <tr< td=""><td>SERIES</td><td>SD</td></tr<>	SERIES	SD	
other NAMESSilbSDGE SIDBANDother NAMES-00C × 55CNUMBER OF POSITIONS4MOUNTING TYPETrough HoleMOUNTING TYPE(Minited)MOLTAL LIFE2000 CyclesLENGTH0.00 CyclesLENGTH0.01 CyclesLENGTH ADOVE BOARD0.01 CyclesLENGTH ADOVE BOARD0.01 CyclesCURRENT RATING0.01 CyclesCURRENT RATING0.01 CyclesCURRENT RATING0.01 CyclesCURRENT RATING0.01 CyclesCURTAT MATERIAL0.01 CyclesCONTACT FINISH0.01 CyclesCURTAT FINISH0.01 CyclesCURTAT FINISH0.01 CyclesCURTAT FINISH0.01 Cycles <t< td=""><td>PITCH</td><td>0.100" (2.54mm), Full</td></t<>	PITCH	0.100" (2.54mm), Full	
oTHER NAMESS004H1BD S004H1BD-NDOPERATING TEMPERATURE40° < 85°C	PACKAGING	Tube	
NUMBER OF POSITIONS4MOUNTING TYPEThough HoleMOINTING TYPE(Inlined)MOSTURE SENSITIVITY LEVEL (MSL)(Inlined)MECHANICAL LIFE2,000 CyclesLENGTH645% (1.63 mm)LEAD FREE STATUS / ROHS STATUSIcd fre/ ROHS CompliantLEAD FREE STATUS / ROHS STATUS(Inlined)FEATURES0.178% (1.52 mm)ELETRICAL LIFE0.000 CyclesELETRICAL LIFE0.000 CyclesCURRENT RATING0.000 CyclesCURRENT RATING0.000 CyclesCUNTACT FINISHGuldCONTACT FINISHGuldCONTACT FINISHGuldCONTACT FINISHSpetBODY MATERIALSpetBODY MATERIALSiles (Standard) CyclesCURTACT TYPESiles (Standard)	OTHER NAMES	*SD04H1BD CKN10988	
MOUNTING TYPEThrough HoleMOUNTING TYPE1(Unlimited)MOISTURE SENSITIVITY LEVEL (MSL)2,000 CyclesMECHANICAL LIFE0.458° (11.63mm)LENGTH646° FC / ROHS CompliantLENGTH ABOVE BOARD1.78° (4.52mm)FEATURES-ELECTRICAL LIFE0.000 CyclesELECTRICAL LIFE0.000 CyclesCURRENT RATING0.000 CyclesCURRENT RATING0.000 CyclesCURRENT RATING0.000 CyclesCONTACT MATERIAL0.000 CyclesCONTACT FINISH0.000 Cycles <t< td=""><td>OPERATING TEMPERATURE</td><td>-40°C ~ 85°C</td></t<>	OPERATING TEMPERATURE	-40°C ~ 85°C	
MOISTURE SENSITIVITY LEVEL (MSL) I (Unlimited) I (Un	NUMBER OF POSITIONS	4	
MECHANICAL LIFE2,000 CyclesLENGTH6.458" (11.63mm)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.178" (4.52mm)FEATURES-ELECTRICAL LIFE2,000 CyclesDETAILED DESCRIPTIONDip Switch SPST 4 Position Through Hole Slide (Standard) Actuator 100mA 25VDCCURRENT RATING000MACONTACT MATERIALGoldCONTACT FINISHGoldCONTACT FINISHPSTBODY MATERIALPolyphthalmide (PPA)ACTUATO TYPESile (Standard)	MOUNTING TYPE	Through Hole	
LinkLINGTH0.458° (11.63mm)LEAD FREE STATUS / ROHS STATUSLed free / ROHS CompliantHEIGHT ABOVE BOARD0.178° (4.52mm)FEATURES-ELECTRICAL LIFE0.000 CyclesDETAILED DESCRIPTIONDip Witch SPST 4 Position Through Hole Slide (Standard) Actuator 100mA 25VDCCURRENT RATING100mACONTACT MATERIALBeyllium CopperCONTACT FINISHGoldBODY MATERIALPolythalamica (PAPA)BODY MATERIALSpstACTUATO TYPESile (Standard)	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)	
LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantHEIGHT ABOVE BOARD0.178" (4.52mm)FEATURES-ELECTRICAL LIFE2,000 CyclesDETAILED DESCRIPTIONDis Witch SPST 4 Position Through Hole Slide (Standard) Actuator 100mA 25VDCCURRENT RATING10mACONTACT MATERIALBerylium CopperCONTACT FINISHGoldBODY MATERIALPolyhthalamide (PPA)BODY MATERIALDisylthalamide (PPA)BODY MATERIALBide (Standard) Standard)ACUATOR TYPESide (Standard) Standard)	MECHANICAL LIFE	2,000 Cycles	
HEIGHT ABOVE BOARD1.78" (4.52mm)FEATURES-ELCTRICAL LIFE200 CyclesDETAILED DESCRIPTION100 ACURRENT RATING000 ACONTACT FINISH6VII CyclesCONTACT FINISH6VII CyclesBOLY MATERIAL9STBOLY MATERIAL6VII CyclesBOLY MA	LENGTH	0.458" (11.63mm)	
FEATURES-ELECTRICAL LIFE2,00 CyclesDETAILED DESCRIPTIONDip Switch SPDS 1 Position Through Hole Slide (Standard) Actuator 100mA 25VDCCURRENT RATING00mACONTACT MATERIALBeylium CopperCONTACT FINISHGldCRCUITSPSTBODY MATERIALPolyhblanide (PAP)ACTACT NATERIALBiolite (Standard) Actuator 100mA 250 ControlBODY MATERIALBiolite (Standard) Actuator 100mA 250 ControlBODY MATERIALBiolite (Standard) Actuator 100mA 250 ControlBODY MATERIALBiolite (Standard) Actuator 200mA 250 ControlBODY MATERIALBiolite (Standard) Actuator	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant	
ELECTRICAL LIFE2,000 CyclesDETAILED DESCRIPTIONDis Witch SPST 4 Position Through Hole Side (Standard) Actuator 100mA 25VDCCURRENT RATING100mACONTACT MATERIALBeylium CopperCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolyphthalemic (PAPA)ACTUATOR TYPEBid (Standard)	HEIGHT ABOVE BOARD	0.178" (4.52mm)	
DETAILED DESCRIPTIONDip Switch SPST 4 Position Through Hole Slide (Standard) Actuator 100mA 25VDCCURRENT RATING100mACONTACT MATERIALBeylium CopperCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolyhtlamide (PPA)ACTUATOR TYPESile (Standard)	FEATURES	-	
CURRENT RATING100mACONTACT MATERIALBerylium CopperCONTACT FINISHGoldCIRCUTSPSBODY MATERIALPolyhthalmide (PPA)ACTUATOR TYPESide (Standard)	ELECTRICAL LIFE	2,000 Cycles	
CONTACT MATERIALBerylium CopperCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolyphtalamide (PPA)ACTUATOR TYPESide (Standard)	DETAILED DESCRIPTION	Dip Switch SPST 4 Position Through Hole Slide (Standard) Actuator 100mA 25VDC	
CONTACT FINISH       Gold         CIRCUIT       SPST         BODY MATERIAL       Polyphthalamide (PPA)         ACTUATOR TYPE       Side (Standard)	CURRENT RATING	100mA	
CIRCUITSPSTBODY MATERIALPolyphthalamide (PPA)ACTUATOR TYPESide (Standard)	CONTACT MATERIAL	Beryllium Copper	
BODY MATERIAL     Polyphthalamide (PPA)       ACTUATOR TYPE     Slide (Standard)	CONTACT FINISH	Gold	
ACTUATOR TYPE Slide (Standard)	CIRCUIT	SPST	
	BODY MATERIAL	Polyphthalamide (PPA)	
ACTUATOR LEVEL Raised	ACTUATOR TYPE	Slide (Standard)	
	ACTUATOR LEVEL	Raised	

# **Related Tags**

C&K SD04H1BD	SD04H1BD Distributor	SD04H1BD Supplier
SD04H1BD Price	SD04H1BD Pictures	SD04H1BD Image
SD04H1BD PDF Datasheet	SD04H1BD Download Datasheet	SD04H1BD Datasheet
SD04H1BD Stock	Buy SD04H1BD	Buy C&K SD04H1BD
C&K SD04H1BD	C&K Supplier	C&K Distributor
C&K SD04H1BD	C&K Components SD04H1BD	

# **Related Products**

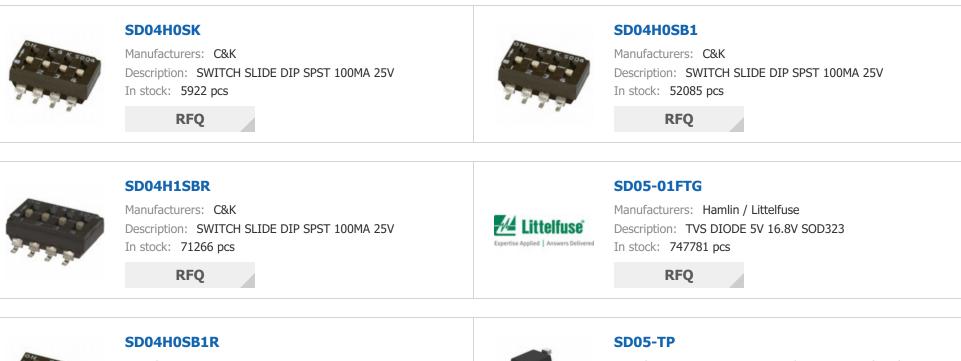

Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 100MA 25V In stock: 64724 pcs



Manufacturers: Micro Commercial Components (MCC) Description: 5V,ESD PROTECTION DEVICES,SOD-32 In stock: 1091892 pcs

RFQ

SD04H1SB



SD04H1B

Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 100MA 25V In stock: 60754 pcs

RFQ

RFQ



Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 100MA 25V In stock: 75022 pcs

RFQ

#### **SD05-7** SD04H0SBR Manufacturers: Diodes Incorporated Manufacturers: C&K Description: TVS DIODE 5V 14.5V SOD323 Description: SWITCH SLIDE DIP SPST 100MA 25V 10 In stock: 275246 pcs In stock: 76299 pcs RFQ RFQ SD04H0SBD SD04H1SK Manufacturers: C&K Manufacturers: C&K 1.12+|+ + + 2.54 Description: SWITCH SLIDE DIP SPST 100MA 25V Description: SWITCH SLIDE DIP SPST 100MA 25V In stock: 5229 pcs In stock: 49547 pcs RFQ RFQ

#### Copyright © 2020 Reliable Distributor of Electronic Components

E-mail: Info@infinity-electronic.com

Address: 17F, Gaylord Commercial Building, 114-118 Lockhart Road, Wan Chai, Hong Kong

