
SDA02HOSBR Details PDF

product details.



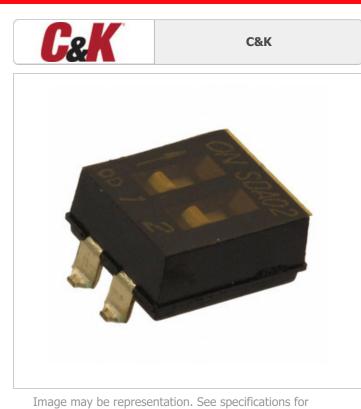

SDA02H0SBR

Part Number:
Manufacturer/Brand:
Product description
Datasheets:
RoHs Status
Stock Condition
Ship From
Shipment Way

C&K SWITCH SLIDE DIP SPST 25MA 24V SDA02H0SBR.pdf Lead free / RoHS Compliant 69167 pcs stock Hong Kong DHL/Fedex/TNT/UPS/EMS

SDA02H0SBR

REQUEST FOR QUOTATION

Specifications of SDA02H0SBR

<table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-row><table-row><table-row><table-row><table-container><table-container><table-container></table-container></table-container></table-container></table-row><table-row><table-row></table-row></table-row><table-row></table-row><table-row></table-row><table-row></table-row><table-row></table-row><table-row></table-row><table-row></table-row><table-row></table-row><table-row></table-row><table-row></table-row></table-row></table-row></table-row></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container>		
DESCRIPTIONSWITCH SLIDE DIP SPE3 XA 24VLEAD FREE STATUS / ROHS STATUSEad free / ROHS CompliantQUANTTY AVAILABLE9167 psDATA SHEETSIG 02010588. pdWASHABEVSVOLTAGE RATINGVSVOLTAGE RATINGOID (2.5 xmm), FullSERLESOID (2.5 xmm), FullPTCH0100 (2.5 xmm), FullPTCH0200 (2.5 xmm), FullPTCH </td <td>PART NUMBER</td> <td>SDA02H0SBR</td>	PART NUMBER	SDA02H0SBR
LED FREE STATUS / RON'S STATUSLed free / RoHS CompliantQUANTTY AVALABLEGIS7 psDATA SHEETYesVALTA SHEATYesVOLTAGE RATINGGIU WINGSTRINGGIU WINGSERLESDATAPTCH0.00° (2.54mm), FullPACKAGINGTape Real (TR)OPIERATING TEMPERATURECNA991TRNUMBER OF POSTITONS2MUNTING TEMPERATUREJOI'C (2.54mm), FullMUNTING TEMPERATURECNA991TRMUNTING TEMPERATUREGIG ROMANMUSTURE SENSITIVITY LEVEL (MSL)GIG ROMANLENGTHLICHIMINATION STATUSLENGTHJOI'C (2.54mm)LENGTHJOI'C (2.54mm)LENGTHJOI'C (2.54mm)MUSTURE SENSITIVITY LEVEL (MSL)GIG ROMANLENGTHJOI'C (2.54mm)LENGTHJOI'C (2.54mm)LENGTH SE ADALDJOI'C (2.54mm)<	MANUFACTURER	C&K
QUANTIY AVAILABLEBiol 2 poi 2	DESCRIPTION	SWITCH SLIDE DIP SPST 25MA 24V
Data sHertSAD21405RR.pdfData sHertYesvoltrace rating4VDCtermination styleGul WingsteriesSDAPTCH0.100° (2.54mm), FullPACKAGINGTape & Reel (TR)orther NAMESGNN991TRorteen tames0.00° (2.64mm), Fullprocession structure40°C ~ 85°Corteen tames0.00° (2.64mm)orteen tames0.00° (2.64mm)orteen tames0.00° (2.64mm)orteen tames0.00° (2.64mm)orteen tames0.00° (2.64mm)orteen tames0.00° (2.64mm)orteen tames0.00° (2.64mm)MURER of POSITIONS1MURER of POSITIONS0.00° (2.64mm)MOUTING TYPE0.00° (2.64mm)MOUTING TYPE0.00° (2.64mm)MOUTING TYPE0.00° (2.64mm)MURER STATUS / RONS STATUS0.00° (2.64mm)LENG THA STATUS / RONS STATUS0.00° (2.64mm)ELENG TAUS / RONS STATUS0.00° (2.64mm)ELENGTAL LIFE1.00° (2.64mm)ELENGTAL LIFE1.00° (2.64mm)ELENGTAL STATUS / RONS STATUS0.00° (2.64mm)ELENGTAL LIFE1.00° (2.64mm)ELENGTAL STATUS / RONS STATUS0.00° (2.64mm)ELENGTAL STATUS / RONS STATUS0.00° (2.64mm)CUTRACT FINISH0.00° (2.64mm)CUTRACT FINISH0.01° (2.64mm)CONTACT FINISH0.01° (2.64mm)CONTACT FINISH0.01° (2.64mm)CONTACT FINISH0.01° (2.64mm)CONTACT FINISH0.01° (2.64mm)<	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ws ws ws volrace rating volrace rating volrace rating stress stress process	QUANTITY AVAILABLE	69167 pcs
VoltAge RATING24VDCTERNINATION STYLEGUI WingSERESSDAPTCH0.10° (2.54mm), FullPACAGINGTake Re(TR)OTHER NAMESCK099 JTROTHER NAMES4°C ~ 8°CNUMBER OF POSITIONS2NUMBER OF POSITIONS2MOUTING TYPEUniditadNUTING TYPE1000 CyclesLENGTH0.278°C / 0.000 CyclesLENGTH0.278°C / 0.000 CyclesLENGTH0.000 CyclesLENGTH0.000 CyclesLENGTH0.000 CyclesLENGTH0.000 CyclesLENGTH0.000 CyclesLENGTH0.000 CyclesLENGTH CALLIFE0.000 CyclesLENGTH CALLIFE0.000 CyclesLENGTH CALLIFE0.000 CyclesLENGTH CALLIFE0.000 CyclesCONTACT FINISHCyclesCONTACT FINISHCyclesCONTACT FINISHCyclesCONTACT FINISHSFICONTACT FINISHSPAIPLICE (PS)CONTACT FINISHS	DATA SHEET	SDA02H0SBR.pdf
TRMINATION STYLEGall WingSRIES50PICH0.00° (25mm), FullPACAGINGTex Ret (TR)OTHEN MMESCM949 TROPERATING TEMPERATURE40° C 3°C CNUMER OF POSITIONS2MOUTING TYPECM040 CMOUTING TYPE1000 CMORTING SENSITIVT LEVEL (MSL)1010 CMECHANICAL LIFE0278 CLENGTH278 CFEGTER STATUS / ROHS C268 CFEGTER STATUS / ROHS C267 CFEGTER STATUS / ROHS C267 CFEGTER STATUS / ROHS C267 CFEGTER STATUS / ROHS C268 CCONTACT FINISH60 CCONTACT FINISH261 CFEGTER STATUS / ROHS C261 CFEGTER STATUS / RO	WASHABLE	Yes
SRIESSDAPITH0.00° (2.54m), FullPACAGINGK08 (RP)OTHER NAMESCK0949 IROPERATING TEMPERATURE40°C ~ 8°CNUMER OF POSITIONS40°C ~ 8°CMOUTTING TYPEGurace MoutMOUTTING TYPE100 (RD)MOUTTING TYPE100 (RD)MOLTING TYPE100 (RD)MOLTING TYPE100 (RD)MECHANICAL LIFE100 (RD)LENGTH102 (RD)HEIGT RADOLE DAGANG103 (RD)FEATURES103 (RD)FEATURES103 (RD)FEATURES100 (RD)CIRCITICAL LIFE100 (RD)CIRCITICAL TARTING100 (RD)CIRCITICAL TARTING100 (RD)CIRCITICAL TARTING100 (RD)CIRCITICITICAL CIRCITICICUCUCUUUUUUUUUUUUUUUUUUUUUUUUUU	VOLTAGE RATING	24VDC
Pitch0.100 (2.54m), FullPACKAGINGFax Rea (TR)OTHER NAMESCN949TROTHER NAMES- MC- AS°CDIVIDER OF POSITIONS2MUNDER OF POSITIONSCIIONICOMOUTING TYPE(J00 (AGCMOSTURE SENSITIVITY LEVEL (MSL)(J00 (AGCLENGTH2.087 (AGCLENGTH2.087 (AGCLENGTH2.087 (AGCLENGTH2.097 (AGCLEIGT ALBOYE BOARD1.016 (AGCLEIGT ALBOYE BOARD2.067 (AGCCINTACT MATERIAL2.067 (AGCCONTACT MATERIAL6.061 (AGCCONTACT FINISH6.061 (AGCCONTACT FINISH6.07 (AGCCONTACT	TERMINATION STYLE	Gull Wing
PACKAGINGTapa Real (TR)OTHER NAMESCN9491TROPERATING TEMPERATURE40°C ~ 85°CNUMBER OF POSITIONS2MOUNTING TYPESuface MoundMOINTING TYPE(10/Inited)MECHANICAL LIFE1,000 cyclesLENGTH0.278°C / 0.60m)LENGTH2.61 fee J ROHS CompliantHEIGHT ABOVE BOARD1,010 cyclesELEGHT CAL LIFE1,000 cyclesELEGHT CAL LIFE1,000 cyclesLEIGHT ABOVE BOARD1,015°C 4.51m)ELEGHT CAL LIFE1,000 cyclesELEGHT CAL LIFE1,000 cyclesELEGTRICAL LIFE1,000 cyclesELEGTRICAL LIFE0,000 cyclesELEGTRICAL LIFE0,000 cyclesELEGTRICAL LIFE0,000 cyclesELEGTRICAL LIFE0,000 cyclesCONTACT MATERIAL0,000 cyclesCONTACT MATERIAL600 cyclesCONTACT FINISH601CONTACT FINISH602CONTACT FINISH602 cyclesBODY MATERIAL602 cyclesCONTACT FINISH602 cyclesCO	SERIES	SDA
OTHER NAMESCKN9491ROPERATING TEMPERATURE40°C & 8°CNUMBER OF POSITIONS2MOUNTING TYPESurface MountMOISTURE SENSITIVITY LEVEL (MSL)1(Unimited)MECHANICAL LIFE1,000 CyclesLENGTH0278' (7.06mm)LENGTH1,015' (4.45mm)HEIGHT ABOVE BOARD1,000 CyclesELETRICAL LIFE1,000 CyclesELETRICAL LIFE1,000 CyclesELETRICAL LIFE1,000 CyclesELETRICAL LIFE1,000 CyclesCURRENT FATING1,000 CyclesELETRICAL LIFE1,000 CyclesCURRENT FATING1,000 CyclesCURRENT FATING1,000 CyclesCURRENT FATING1,000 CyclesCURRENT FATING1,000 CyclesCURRENT FATING1,000 CyclesCURRENT FATING60/GCONTACT FINISH60/GCONTACT FINISH60/GBODY MATERIAL9Npenylens Liftle (PS)BODY MATERIAL61/G Candard)CURTAT TYPE1/60 Cycles	PITCH	0.100" (2.54mm), Full
OPERATING TEMPERATURE40°< 85°CNUMBER OF POSITIONS2MOUNTING TYPESuface MountMOINTING TYPE(Iulimited)MOISTURE SENSITIVITY LEVEL (MSL)100 OrdesLENGTH0.00 OrdesLENGTH0.278°C 0.0000 JULLENGTH0.278°C 0.0000 JULLENGTH ABOVE BOARD0.175°C 4.45000 JULELERTRA LIFE0.100 OrdesELERTRA LIFE0.0000 OrdesELERTRA LIFE0.0000 JULDETATLED DESCRIPTIONDIS Wich SPST 2 Position Surface Mount Slide (Standard) Actuator 25mA 24VDCCURRENT RATING0.00000 JULCONTACT FINISHOidCONTACT FINISHOidBODY MATERIALSPS1BODY MATERIALDisphenyensulfide (PSS)AUX-NDYSide (Standard)Side Standard StandardSide (Standard)	PACKAGING	Tape & Reel (TR)
NUMBER OF POSITIONS2MOUNTING TYPESuface MoundMOINTING TYPE(Unlinde)MOSTURE SENSITIVIT LEVEL (MSL)(Unlinde)MECHANICAL LIFEJ000 (des)LENGTH0278" (Des)LEAD FREE STATUS / ROHS STATUSEd free / ROHS CompliatLEAD FREE STATUS / ROHS DES1078" (Adsmn)ELETRICAL LIFEJ000 (des)ELETRICAL LIFEJ000 (des)CIARENT RATINGSinde Status / Song CompliantCIARENT RATINGSinde Status / Song CompliantCONTACT FINISHGui (des)CONTACT FINISHGui (des)BODY MATERIALSindensement (des)BODY MATERIALSindensement (des)CUARTENT ATTINGSindensement (des)ROTACT FINISHSindensement (des)BODY MATERIALSindensement (des)Sindensement (des) <t< td=""><td>OTHER NAMES</td><td>CKN9491TR</td></t<>	OTHER NAMES	CKN9491TR
MOUNTING TYPESurface MonitMOINTING TYPE(InlimitedMOISTURE SENSITIVT LEVEL (MSL)(Inlimited)MECHANICAL LIFE(Indiced)LENGTH(Indiced)LENGTH(Indiced)HEIGH TABOVE BOARD(Indiced)FATURES(Indiced)FLECTRICAL LIFE(Indiced)ELECTRICAL LIFE(Indiced)ELECTRICAL LIFE(Indiced)CIRCINT ARTING(Indiced)CIRCINT ARTING(Indiced)CONTACT MATERIAL(Indiced)CONTACT FINISH(Indiced)CIRCUTSTCIRCUTALIFICAL(Indiced)BODY MATERIAL(Indiced)BODY MATERIAL(Indiced)ANDALESCALIFICAL(Indiced)BODY MATERIAL(Indiced)BODY MAT	OPERATING TEMPERATURE	-40°C ~ 85°C
MOISTURE SENSITIVITY LEVEL (MSL)I (Unimited)MOISTURE SENSITIVITY LEVEL (MSL)1,000 (cleanMECHANICAL LIFE0,000 (cleanLENGTHCaffer / Rob/ScompliatLEAD FREE STATUS / ROHS STATUSCaffer / Rob/ScompliatHEIGHT ABOVE BOARD0,15° (4.45mm)FEATURES1,000 (cleanELECTRICAL LIFE0,000 (cleanDETAILED DESCRIPTION0,000 (cleanCURRENT RATING0,000 (cleanCONTACT MATERIAL604CONTACT FINISH0,000 (cleanCONTACT FINISH0,000 (cleanCIRCUTSTROM MATERIAL0,000 (cleanBODY MATERIAL0,000 (clean <t< td=""><td>NUMBER OF POSITIONS</td><td>2</td></t<>	NUMBER OF POSITIONS	2
MECHANICAL LIFE1,000 CyclesLENGTH0,27% (.06mm)LENGTHLed FRE/ CACHSCATURSLEAD FRES STATUS / COLORS0,15% (.45mm)FIGHT ABOVE BOARD0,15% (.45mm)FATURESTap SealELECTRICAL LIFE0,000 CyclesCOLTRENT RATINGDF Sold Sold Sold Sold Sold Sold Sold Sold	MOUNTING TYPE	Surface Mount
LinkLINGTH0.278" (7.06mm)LEAD FREE STATUS / ROHS STATUSLed free / ROHS CompliantHEIGHT ABOVE BOARD0.175" (4.45mm)FATURESTae SalELECTRICAL LIFE0.00 CyclesDETAILED DESCRIPTION0.90 CyclesCONTACT MATERIALSmallCONTACT MATERIALSeylim CopperCONTACT FINISHGoldBODY MATERIALSpylim CoppesBODY MATERIALSpylim CoppesBODY MATERIALSignen Sulfide (PSS)BODY MATERIALSignen Sulfide (PSS)BODY MATERIALSignen Sulfide (PSS)BODY MATERIALSignen Sulfide (PSS)	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.175" (4.45mm)FEATURESTape SealELCTRICAL LIFE1,000 CyclesDETAILED DESCRIPTIONDis Witch SPST 2 Position Surface Mount Slide (Standard) Actuator 25mA 24VDCCURRENT RATINGSmACONTACT MATERIALGoldCONTACT FINISHGoldBODY MATERIALSPSTBODY MATERIALPolynengenging (PSS)ACTUATOR TYPESite (Standard) Complex	MECHANICAL LIFE	1,000 Cycles
HEIGHT ABOVE BOARD0.15° (4.45mm)FEATURESTap SealELCTRICAL LIFE.000 CyclesDETAILED DESCRIPTION.000 Cycles C	LENGTH	0.278" (7.06mm)
FEATURESTape SealELECTRICAL LIFEJ,000 CyclesDETAILED DESCRIPTIONDip Switch SPST 2 Position Surface Mount Slide (Standard) Actuator 25mA 24VDCCURRENT RATINGSmACONTACT MATERIALBeyllium CopperCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolypengesUnglice (Standard)ACTUATOR TARIALSeylium CouplesBODY MATERIALBiglisum CouplesBODY MATERIALBiglisum CouplesACTUATOR TARIALBiglisum CouplesACTUATOR TARIALBiglisum CouplesACTUATOR TARIALBiglisum CouplesACTUATOR TARIALBiglisum CouplesACTUATOR TARIALBiglisum Couples	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ELECTRICAL LIFE,000 CyclesDETALED DESCRIPTIONDis Wich SPST 2 Position Suiface Mount Side (Standard) Actuator 25mA 24VDCCURRENT RATING25mACONTACT MATERIALBerlium CopperCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolynengengengengengengengengengengengengeng	HEIGHT ABOVE BOARD	0.175" (4.45mm)
DETAILED DESCRIPTIONDip Switch SPST 2 Position Surface Mount Slide (Standard) Actuator 25mA 24VDCCURRENT RATING25mACONTACT MATERIALBerylium CopperCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolybengSulfide (PPS)ACTUATOR TYPESile (Standard)	FEATURES	Tape Seal
CURRENT RATING25mACONTACT MATERIALBerylium CopperCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolyhenyelne Sulfide (PPS)ACTUATOR TYPESile (Standard)	ELECTRICAL LIFE	1,000 Cycles
CONTACT MATERIALBerylium CopperCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolyhenyline Sulfide (PPS)ACTUATOR TYPESile (Standard)	DETAILED DESCRIPTION	Dip Switch SPST 2 Position Surface Mount Slide (Standard) Actuator 25mA 24VDC
CONTACT FINISH Gold CIRCUIT SPST BODY MATERIAL Polyphenylene Sulfide (PPS) ACTUATOR TYPE Side (Standard)	CURRENT RATING	25mA
CIRCUITSPSTBODY MATERIALPolyphenylene Sulfide (PPS)ACTUATOR TYPESide (Standard)	CONTACT MATERIAL	Beryllium Copper
BODY MATERIAL Polyphenylene Sulfide (PPS) ACTUATOR TYPE Slide (Standard)	CONTACT FINISH	Gold
ACTUATOR TYPE Slide (Standard)	CIRCUIT	SPST
	BODY MATERIAL	Polyphenylene Sulfide (PPS)
ACTUATOR LEVEL Flush, Recessed	ACTUATOR TYPE	Slide (Standard)
	ACTUATOR LEVEL	Flush, Recessed

Related Tags

C&K SDA02H0SBR	SDA02H0SBR Distributor	SDA02H0SBR Supplier
SDA02H0SBR Price	SDA02H0SBR Pictures	SDA02H0SBR Image
SDA02H0SBR PDF Datasheet	SDA02H0SBR Download Datasheet	SDA02H0SBR Datasheet
SDA02H0SBR Stock	Buy SDA02H0SBR	Buy C&K SDA02H0SBR
C&K SDA02H0SBR	C&K Supplier	C&K Distributor
C&K SDA02H0SBR	C&K Components SDA02H0SBR	

Related Products



SDA02H1SBD

Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: 71894 pcs



SDA02H0SKD

Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: 5472 pcs

RFQ



SDA02H0SK

RFQ

RFQ

SDA02H1SKD

Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: 6914 pcs



SDA02H0SBD

Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: 57731 pcs

RFQ



Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: 3309 pcs

RFQ



Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: 6111 pcs

RFQ



SDA02H0BD

Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: 99785 pcs

RFQ

SDA02H0KD

SDA02H1KD



Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: 5659 pcs

RFQ

SDA02H0K



Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: 5837 pcs

RFQ



SDA02H0SB

Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: 65795 pcs

RFQ



SDA02H0B

Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: 81933 pcs

RFQ



SDA02H1BD

Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: 94014 pcs

RFQ

Copyright © 2020 Reliable Distributor of Electronic Components

E-mail: Info@infinity-electronic.com

Address: 17F, Gaylord Commercial Building, 114-118 Lockhart Road, Wan Chai, Hong Kong

