

APEM **APEM Inc.** APEI

TL36P005000

Part Number:

Manufacturer/Brand:

Datasheets:

Product description

RoHs Status Stock Condition

Ship From Shipment Way TL36P005000

APEM Inc.

SWITCH TOGGLE SPDT 0.4VA 20V

TL36P005000.pdf

Lead free / RoHS Compliant

10772 pcs stock

Hong Kong

DHL/Fedex/TNT/UPS/EMS


REQUEST FOR QUOTATION

Image may be representation. See specifications for product details.

TIJ6P005000 MANUFACTURER APEM Inc. DESCRIPTION SWITCH TOGGLE SPDT 0.4VA 20V LEAD FREE STATUS / ROHS STATUS DATA SHEET DATA SH		
MANUFACTURER MENUFACTURER MENUFACTURER MITCH TOGGLE SPDT 0.4VA 20V LEAD FREE STATUS / ROHS STATUS LEAD FREE STATUS / ROHS STATUS LEAD FREE STATUS / ROHS STATUS LOT772 pcs DATA SHEET DATA SHEET DATA SHEET DATA SHEET DATA SHEET DATA SHEET MOULTAGE RATING - DC 20V VOLTAGE RATING - AC 20V REEMINATION STYLE PC PIP SWITCH FUNCTION On-On SERIES IL MARCH COULT DIMENSIONS - L MARCH COULT DIMENSIONS - C APA-4088 TLS#9005000-HD TLS#9005000-HD TLS#9005000-HD TLS#9005000-HD LILLUMINATION TYPE Through Hole MOISTURE SENSITIVITY LEVEL (MSL) LEAD FREE STATUS / ROHS STATUS LEAD FREE STATUS / ROHS STATUS LEAD FREE STATUS / ROHS STATUS LILLUMINATION VOLTAGE (NOMINAL) LILLUMINATION VOLTAGE (NOMINAL) LILLUMINATION YPPE, COLOR LILLUMINATION YOLTAGE (NOMINAL) LILLUMINATION YPPE, COLOR LILLUMINATION		Specifications of TL36P005000
MANUFACTURER MEMORATURER MEMORATURER MUTCH TOGGLE SPDT 0.4VA 20V LEAD FREE STATUS / ROHS STATUS LEAD FREE STATUS / ROHS STATUS LEAD FREE STATUS / ROHS STATUS LOT77 pcs DATA SHEET DATA SHEE	DADT NUMBER	TI 26000000
DEPOKRIPTION SWITCH TOGGLE SPOT 0.4VA 20V DEAD FREE STATUS / ROHS STATUS Lead free / ROHS Compliant DUT72 pcs		
Lead free / RoHS Compliant QUANTITY AVAILABLE 10772 pcs DATA SHEET 20V VOLTAGE RATING - DC 20V VOLTAGE RATING - AC AC 40-0-0-0 SERILES TL VOLTAGE RATING - AC 40-0-0-0 VOLTAGE RATING - AC 40-0-0-0 VOLTAGE RATING - AC 40-0-0-0-0 VOLTAGE RATING - AC 40-0-0-0-0 VOLTAGE RATING - AC 40-0-0-0-0 VOLTAGE RATING - AC 40-0-0-0-0-0 VOLTAGE RATING - AC 40-0-0-0-0-0-0 VOLTAGE RATING - AC 40-0-0-0-0-0-0 VOLTAGE RATING - AC 40-0-0-0-0-0 VOLTAGE RATING - AC 40-0-0-0-0-0-0 VOLTAGE RATING - AC 40-0-0-0-0-0 VOLTAGE RATING - AC 40-0-0-0-0 VOLTAGE RATING - AC 40-0-0-0 VOLTAGE RATING - AC 40-0-0-0-0 VOLTAGE RATING - AC 40-0-0-0 VOL		
QUANTITY AVAILABLE 10772 pcs DATA SHEET 50°1136P005000.pdf VOLTAGE RATING - DC 20V VOLTAGE RATING - AC 20V SWITCH FUNCTION On-On SWITCH FUNCTION On-On SERIES TL PARABLE LOTOUT DIMENSIONS - PACKAGING Bulk OTHER NAMES 73-9088 73-96005000-ND 73-9608 MOUNTING TYPE Through Hole MOISTURE SENSITIVITY LEVEL (MSL) 1 (Unlimited) LEAD FREE STATUS / ROHS STATUS Lead free / ROHS Compliant LULUMINATION VOLTAGE (NOMINAL) - LULUMINATION VOLTAGE (NOMINAL) - LEECTRICAL LIFE 60,000 Cycles DETAILED DESCRIPTION Toggie Switch SPDT Through Hole CURRENT RATING 0.4VA (AC/DC) CURRENT RATING 0.4VA (AC/DC) CURRENT RATING Unthreaded ACTUATOR TYPE Standard Round		
CONTAGE RATING - DC 20V VOLTAGE RATING - AC 20V VOLTAGE RATING - AC 20V VOLTAGE RATING - AC 20V CONTAGE RATING - AC 20V SWITCH FUNCTION On-On SWITCH FUNCTION On-On SERIES TL PACKAGING Bulk OTHER NAMES 679-4088 TL36P005000-ND TL36P005000-ND DEPERATING TEMPERATURE 430°C ~ 85°C MOUNTING TYPE Through Hole MOISTURE SENSITIVITY LEVEL (MSL) 1 (Unlimited) LEAD FREE STATUS / ROHS STATUS Lead free / ROHS Compliant LILLUMINATION VOLTAGE (MOMINAL) - LILLUMINATION TYPE, COLOR - LEAT TULL (LIVE (MOMINAL) Non-Illuminated LEAT TULL (LIVE (MOMINAL) FOOD Cycles LEAT TULL (LIVE (MOMINAL) Toggle Switch SPDT Through Hole DETAILLED DESCRIPTION Toggle Switch SPDT Through Hole DETAILLED DESCRIPTION Toggle Switch SPDT Through Hole CURRENT RATING O.4VA (AC/DC) CURRENT RATING O.4VA (AC/DC) <td></td> <td></td>		
VOLTAGE RATING - DC 20V VOLTAGE RATING - AC 20V VOLTAGE RATING - AC 20V SERIES PC PIN SERIES TL PACKAGING Bulk DOTHER NAMES 679-4088 PACKAGING TNOUGH HOLE MOUNTING TYPE Through Hole MOUNTING TYPE Through Hole MOUNTING TYPE Through Hole MOUSTURE SENSITIVITY LEVEL (MSL) 1 (Unlimited') LEAD FREE STATUS / ROHS STATUS Lead free / ROHS Compliant LILLUMINATION VOLTAGE (NOMINAL) - LILLUMINATION TYPE, COLOR - LILLUMINATION TYPE, COLOR - LELECTICAL LIFE 60,000 Cycles DETAILED DESCRIPTION Toggle Switch SPDT Through Hole CURRENT RATING 0.4VA (AC/DC) CURRENT RATING Unthreaded ACTUATOR TYPE Standard Round ACTUATOR TYPE Standard Round		
VOLTAGE RATING - AC TERMINATION STYLE POP PIP SWITCH FUNCTION On-On SERIES TL PANEL CUTOUT DIMENSIONS PACKAGING DUIK POPHER NAMES OTHER NAMES OTHER NAMES OTHER NAMES OTHER NAMES OTHER STATUS MOUNTING TYPE MOUNTING TYPE MOUNTING TYPE MOUNTING SYNTUS SENSITIVITY LEVEL (MSL) LEAD FREE STATUS / ROHS STATUS LEAD FREE STATUS / ROHS STATUS LEAD FREE STATUS / ROHS STATUS LILLIMINATION VOLTAGE (NOMINAL) TERMINATION TYPE, COLOR TELLIMINATION TYPE, COLOR TELLIMINATION TYPE, COLOR TELLIMINATION FEATURES ELECTRICAL LIFE GO, 000 Cycles DETAILED DESCRIPTION TOGGIE SWITCH SPUT THOUGH Hole CURRENT RATING CURRENT	DATA SHEET	TL36P005000.pdf
PC Pin SWITCH FUNCTION On-On SERIES TL PANEL CUTOUT DIMENSIONS - PACKAGING BUIK OTHER NAMES OTHER N	VOLTAGE RATING - DC	20V
SWITCH FUNCTION On-On SERIES TL PARKEL CUTOUT DIMENSIONS - PACKAGING Bulk DITHER NAMES 679-4088 TL36P005000-ND DIFFER NAMES 730°C ~ 85°C MOUNTING TEMPERATURE -30°C ~ 85°C MOUNTING TYPE Through Hole MOISTURE SENSITIVITY LEVEL (MSL) 1 (Unlimited) LEAD FREE STATUS / ROHS STATUS Lead free / ROHS Compliant ILLUMINATION VOLTAGE (NOMINAL) - ILLUMINATION TYPE, COLOR - FEATURES Epoxy Sealed Terminals ELECTRICAL LIFE 60,000 Cycles DETAILED DESCRIPTION Toggle Switch SPDT Through Hole CURRENT RATING 0.4VA (AC/DC) BUSHING THREAD Unthreaded ACTUATOR TYPE Standard Round ACTUATOR MATERIAL Brass, Nickel Plated	VOLTAGE RATING - AC	20V
FERIES TL PANEL CUTOUT DIMENSIONS - PACKAGING BUIK OTHER NAMES 679-4088 TL36P005000-ND OPERATING TEMPERATURE -30°C ~ 85°C MOUNTING TYPE THROUGH IN	TERMINATION STYLE	PC Pin
PACKAGING BUIK PACKAGING BUIK OTHER NAMES	SWITCH FUNCTION	On-On
Bulk OTHER NAMES O	SERIES	TL
CTHER NAMES 679-4088 TL36P005000-ND CPERATING TEMPERATURE -30°C ~ 85°C MOUNTING TYPE Through Hole MOISTURE SENSITIVITY LEVEL (MSL) LEAD FREE STATUS / ROHS STATUS LILLUMINATION VOLTAGE (NOMINAL) FEATURES FEATURES EDOXY Sealed Terminals ELECTRICAL LIFE DETAILED DESCRIPTION TOggle Switch SPDT Through Hole CURRENT RATING CURRENT RATING CURRENT RATING CURRENT RATING LULLUMINATION BUSHING THREAD Unthreaded ACTUATOR MATERIAL Brass, Nickel Plated	PANEL CUTOUT DIMENSIONS	-
TL36P005000-ND DPERATING TEMPERATURE -30°C ~ 85°C MOUNTING TYPE Through Hole MOISTURE SENSITIVITY LEVEL (MSL) Lead free / ROHS Compliant LEAD FREE STATUS / ROHS STATUS Lead free / ROHS Compliant LLUMINATION VOLTAGE (NOMINAL) - LLUMINATION TYPE, COLOR FEATURES Epoxy Sealed Terminals ELECTRICAL LIFE 60,000 Cycles DETAILED DESCRIPTION Toggle Switch SPDT Through Hole CURRENT RATING CLIVAL (AC/DC) SPDT BUSHING THREAD ACTUATOR TYPE Standard Round ACTUATOR MATERIAL Brass, Nickel Plated	PACKAGING	Bulk
MOUNTING TYPE MOUNTING TYPE MOISTURE SENSITIVITY LEVEL (MSL) LEAD FREE STATUS / ROHS STATUS LEAD FREE STATUS / ROHS STATUS LEAD FREE STATUS / ROHS STATUS LILUMINATION VOLTAGE (NOMINAL) LILUMINATION VOLTAGE (NOMINAL) LILUMINATION TYPE, COLOR LILUMINATION MON-Illuminated FEATURES EDOXY Sealed Terminals ELECTRICAL LIFE DETAILED DESCRIPTION Toggle Switch SPDT Through Hole CURRENT RATING CURRENT RATING Unthreaded ACTUATOR MATERIAL Brass, Nickel Plated	OTHER NAMES	
MOISTURE SENSITIVITY LEVEL (MSL) LEAD FREE STATUS / ROHS STATUS LEAD free / ROHS Compliant LEUMINATION VOLTAGE (NOMINAL) LLUMINATION TYPE, COLOR LLUMINATION TYPE, COLOR LLUMINATION Non-Illuminated EPOXY Sealed Terminals ELECTRICAL LIFE 60,000 Cycles DETAILED DESCRIPTION Toggle Switch SPDT Through Hole CURRENT RATING 0.4VA (AC/DC) EURICUIT SPDT BUSHING THREAD Unthreaded ACTUATOR MATERIAL Brass, Nickel Plated	OPERATING TEMPERATURE	-30°C ∼ 85°C
LEAD FREE STATUS / ROHS STATUS LEAd free / RoHS Compliant LILUMINATION VOLTAGE (NOMINAL) LILUMINATION TYPE, COLOR LILUMINATION Mon-Illuminated EACTUATOR MATERIAL LEAD FREE STATUS / ROHS STATUS LEAD free / RoHS Compliant	MOUNTING TYPE	Through Hole
ILLUMINATION VOLTAGE (NOMINAL) ILLUMINATION TYPE, COLOR ILLUMINATION Non-Illuminated EPOXY Sealed Terminals ELECTRICAL LIFE 60,000 Cycles DETAILED DESCRIPTION TOGGIE Switch SPDT Through Hole CURRENT RATING 0.4VA (AC/DC) CIRCUIT SPDT BUSHING THREAD ACTUATOR MATERIAL Brass, Nickel Plated	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
ILLUMINATION VOLTAGE (NOMINAL) ILLUMINATION TYPE, COLOR ILLUMINATION Non-Illuminated Epoxy Sealed Terminals ELECTRICAL LIFE 60,000 Cycles DETAILED DESCRIPTION Toggle Switch SPDT Through Hole CURRENT RATING 0.4VA (AC/DC) CIRCUIT SPDT CIRCUIT BUSHING THREAD Unthreaded ACTUATOR MATERIAL Brass, Nickel Plated	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ILLUMINATION TYPE, COLOR ILLUMINATION Non-Illuminated FEATURES Epoxy Sealed Terminals ELECTRICAL LIFE 60,000 Cycles DETAILED DESCRIPTION Toggle Switch SPDT Through Hole CURRENT RATING 0.4VA (AC/DC) CIRCUIT SPDT BUSHING THREAD Unthreaded ACTUATOR TYPE Standard Round ACTUATOR MATERIAL Brass, Nickel Plated	INGRESS PROTECTION	-
FEATURES Epoxy Sealed Terminals ELECTRICAL LIFE 60,000 Cycles DETAILED DESCRIPTION Toggle Switch SPDT Through Hole CURRENT RATING 0.4VA (AC/DC) CIRCUIT SPDT BUSHING THREAD Unthreaded ACTUATOR TYPE Standard Round ACTUATOR MATERIAL Non-Illuminated Epoxy Sealed Terminals 60,000 Cycles 10,000 Cycle	ILLUMINATION VOLTAGE (NOMINAL)	-
ELECTRICAL LIFE 60,000 Cycles DETAILED DESCRIPTION Toggle Switch SPDT Through Hole CURRENT RATING 0.4VA (AC/DC) CIRCUIT SPDT BUSHING THREAD Unthreaded ACTUATOR TYPE Standard Round ACTUATOR MATERIAL Brass, Nickel Plated	ILLUMINATION TYPE, COLOR	-
ELECTRICAL LIFE 60,000 Cycles DETAILED DESCRIPTION Toggle Switch SPDT Through Hole CURRENT RATING 0.4VA (AC/DC) CIRCUIT SPDT BUSHING THREAD Unthreaded ACTUATOR TYPE Standard Round ACTUATOR MATERIAL Brass, Nickel Plated	ILLUMINATION	Non-Illuminated
Toggle Switch SPDT Through Hole CURRENT RATING 0.4VA (AC/DC) CIRCUIT SPDT BUSHING THREAD Unthreaded ACTUATOR TYPE ACTUATOR MATERIAL Toggle Switch SPDT Through Hole 0.4VA (AC/DC) SPDT Unthreaded Standard Round Brass, Nickel Plated	FEATURES	Epoxy Sealed Terminals
CURRENT RATING 0.4VA (AC/DC) SPDT BUSHING THREAD ACTUATOR TYPE ACTUATOR MATERIAL 0.4VA (AC/DC) SPDT Unthreaded Unthreaded Standard Round Brass, Nickel Plated	ELECTRICAL LIFE	60,000 Cycles
SPDT BUSHING THREAD Unthreaded ACTUATOR TYPE Standard Round ACTUATOR MATERIAL Brass, Nickel Plated	DETAILED DESCRIPTION	Toggle Switch SPDT Through Hole
BUSHING THREAD ACTUATOR TYPE Standard Round ACTUATOR MATERIAL Brass, Nickel Plated	CURRENT RATING	0.4VA (AC/DC)
ACTUATOR TYPE Standard Round ACTUATOR MATERIAL Brass, Nickel Plated	CIRCUIT	SPDT
ACTUATOR MATERIAL Brass, Nickel Plated	BUSHING THREAD	Unthreaded
	ACTUATOR TYPE	Standard Round
ACTUATOR LENGTH 5.30mm	ACTUATOR MATERIAL	Brass, Nickel Plated
	ACTUATOR LENGTH	5.30mm

Related Tags

APEM Inc. TL36P005000	TL36P005000 Distributor	TL36P005000 Supplier
TL36P005000 Price	TL36P005000 Pictures	TL36P005000 Image
TL36P005000 PDF Datasheet	TL36P005000 Download Datasheet	TL36P005000 Datasheet
TL36P005000 Stock	Buy TL36P005000	Buy APEM Inc. TL36P005000
APEM Inc. TL36P005000	APEM Inc. Supplier	APEM Inc. Distributor
APEM Inc. TL36P005000	APEM Components, LLC TL36P005000	APEM Components, LLC TL36P005000

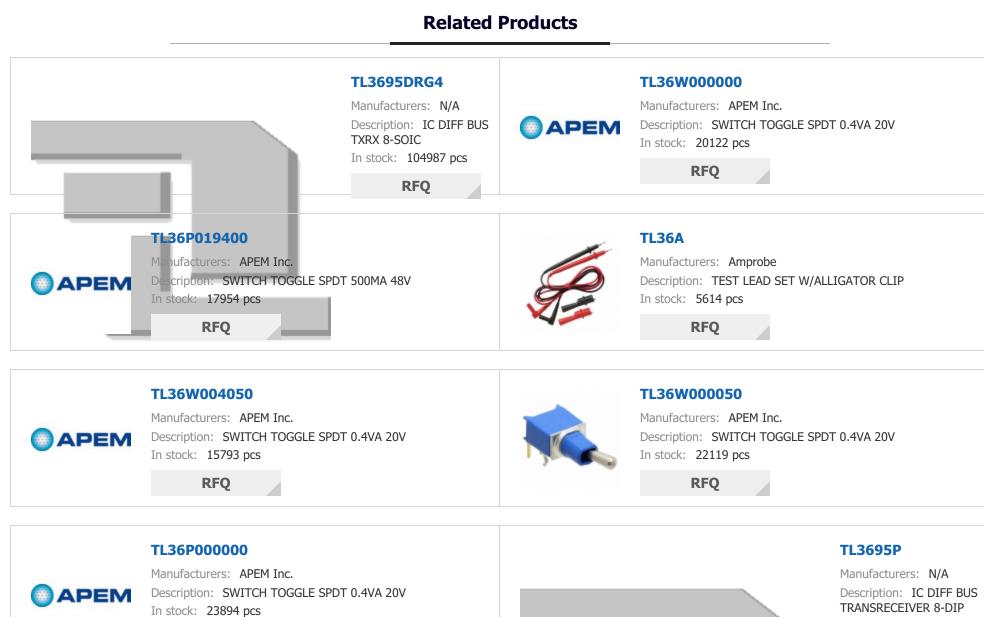



RFQ

In stock: 17673 pcs

APEM

Manufacturers: APEM Inc.

In stock: 19731 pcs


RFQ

TL36W005200

Description: SWITCH TOGGLE SPDT 0.4VA 20V

In stock: 16530 pcs

RFQ



TL3695PG4

In stock: 42609 pcs

RFQ















