N/A Image may be representation. See specifications for product details.

CD74HC4067M96

Part Number: Manufacturer/Brand:

Product description

Datasheets: RoHs Status

Ship From

Stock Condition

Shipment Way

CD74HC4067M96

N/A

IC MUX/DEMUX 1X16 24SOIC

Lead free / RoHS Compliant

330491 pcs stock

Hong Kong

DHL/Fedex/TNT/UPS/EMS


REQUEST FOR QUOTATION

PART NUMBER MANUFACTURER N/A DESCRIPTION LIC MUX/DEMUX 1X16 245OIC LEAD FREE STATUS / ROHS STATUS LEAD free / ROHS Compliant QUANTITY AVAILABLE DATA SHEET VOLTAGE - SUPPLY, SINGLE (V+) VOLTAGE - SUPPLY, DUAL (V±) SWITCH TIME (TON, TOFF) (MAX) SINS, 49ns SWITCH TIME (TON, TOFF) (MAX) SUPPLIER DEVICE PACKAGE 24-SOIC SERIES - PACKAGING PACKAGING Tape & Reel (TR) PACKAGIC / CASE QUANTING TEMPERATURE ON-STATE RESISTANCE (MAX) LOO OPERATING TEMPERATURE ON-STATE RESISTANCE (MAX) NUMBER OF CIRCUITS 1 MULTIPLEXER/DEMULTIPLEXER CIRCUIT MOISTURE SENSITIVITY LEVEL (MSL) LEAD FREE STATUS / ROHS STATUS LEAD free / ROHS Compliant DETAILED DESCRIPTION LEAD FREE STATUS / ROHS STATUS LEAD free / ROHS Compliant CURRENT - LEAKAGE (IS(OFF)) (MAX) ROHANNEL-TO-CHANNEL MATCHING (ARON) CHANNEL-TO-CHANNEL MATCHING (ARON) SPF, 50PF BASE PART NUMBER 74HC-4067		Specifications of CD74HC4067M96
MANUFACTURER DESCRIPTION IC MUX/DEMUX 1X16 24SOIC LEAD FREE STATUS / ROHS STATUS LEAD free / ROHS Compliant QUANTITY AVAILABLE 300491 pcs DATA SHEET VOLTAGE - SUPPLY, SINGLE (V+) VOLTAGE - SUPPLY, SINGLE (V+) VOLTAGE - SUPPLY, DIAL (V*) - SWITCH TIME (TON, TOFF) (MAX) SIns, 49ns SWITCH CIRCUIT SUPPLIER DEVICE PACKAGE 24-SOIC SERIES - PACKAGING Tape & Reef (TR) PACKAGE / CASE 24-SOIC (0.295*, 7.50mm Width) OTHER NAMES OTHER NAMES OPERATING TEMPERATURE - 55°C ~ 125°C (TA) ON-STATE RESISTANCE (MAX) I60 Ohm NUMBER OF CIRCUITS I MULTIPLEXER/DEMULTIPLEXER CIRCUIT MOISTURE SENSITIVITY LEVEL (MSL) LEAD FREE STATUS / ROHS STATUS LEAD free / ROHS Compliant DETAILED DESCRIPTION I Circuit IC Swetch 16:1 160 Ohm 24-SOIC CURRENT - LEAKAGE (ISOFF) (MAX) RONA CROSSTALK CHARNEL-TO-CHANNEL MATCHING (ARON) 6.5 Ohm CHANNEL-TO-CHANNEL MATCHING (ARON) 8.5 Ohm CHANNEL-TO-CHANNEL MATCHING (ARON) 5 pf, 50pF BASE PART NUMBER		Specifications of CB7 into 10071130
IC MUX/DEMUX 1X16 Z4SOIC	PART NUMBER	CD74HC4067M96
LEAD FREE STATUS / ROHS STATUS Lead free / ROHS Compliant QUANTITY AVAILABLE 330491 pcs DATA SHEET	MANUFACTURER	N/A
QUANTITY AVAILABLE 330491 pcs DATA SHEET VOLTAGE - SUPPLY, SINGLE (V+) 2 V ~ 6 V VOLTAGE - SUPPLY, DUAL (V±) - SWITCH TIME (TON, TOFF) (MAX) 51ns, 49ns SWITCH CIRCUIT - SUPPLIER DEVICE PACKAGE 24-SOIC SERIES - PACKAGING Tape & Reel (TR) PACKAGING Tape & Reel (TR) PACKAGE / CASE 24-SOIC (0.295°, 7.50mm Width) OTHER NAMES 296-29408-2 CD74HC40679M6-ND OPERATING TEMPERATURE -55°C ~ 125°C (TA) ON-STATE RESISTANCE (MAX) 160 Ohm NUMBER OF CIRCUITS 1 MULTIPLEXER/DEMULTIPLEXER CIRCUIT 16:1 MOISTURE SENSITIVITY LEVEL (MSL) 1 (Unlimited) LEAD FREE STATUS / ROHS STATUS Lead free / ROHS Compliant DETAILED DESCRIPTION 1 Circuit IC Switch 16:1 160 Ohm 24-SOIC CURRENT - LEAKAGE (IS(OFF)) (MAX) 800nA CROSSTALK - CHANNEL TO-CHANNEL MATCHING (ARON) 8.5 Ohm CHANNEL CAPACITANCE (CS(OFF), CD(OFF)) 5pF, 50pF BASE PART NUMBER 74HC4067	DESCRIPTION	IC MUX/DEMUX 1X16 24SOIC
DATA SHEET VOLTAGE - SUPPLY, SINGLE (V+) 2 V ~ 6 V VOLTAGE - SUPPLY, DUAL (V±) - SWITCH TIME (TON, TOFF) (MAX) 51ns, 49ns SWITCH CIRCUIT - SUPPLIER DEVICE PACKAGE 24-SOIC SERIES - PACKAGING Tape & Reel (TR) PACKAGE / CASE 24-SOIC (0.295", 7.50mm Width) OTHER NAMES 296-29408-2 CD74HC4067M96-ND OPERATING TEMPERATURE -55°C ~ 125°C (TA) ON-STATE RESISTANCE (MAX) 160 Ohm NUMBER OF CIRCUITS 1 MULTIPLEXER/DEMULTIPLEXER CIRCUIT 16:1 MOISTURE SENSITIVITY LEVEL (MSL) 1 (Unlimited) LEAD FREE STATUS / ROHS STATUS Lead free / ROHS Compliant DETAILED DESCRIPTION 1 Circuit IC Switch 16:1 160 Ohm 24-SOIC CURRENT - LEAKAGE (IS(OFF)) (MAX) 800nA CROSSTALK - CHANNEL-TO-CHANNEL MATCHING (ARON) 8.5 Ohm CHANNEL CAPACITANCE (CS(OFF), CD(OFF)) 5pF, 50pF BASE PART NUMBER 74HC4067	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
VOLTAGE - SUPPLY, SINGLE (V+) 2 V ~ 6 V VOLTAGE - SUPPLY, DUAL (V±) - SWITCH TIME (TON, TOFF) (MAX) 51ns, 49ns SWITCH CIRCUIT - SUPPLIER DEVICE PACKAGE 24-SOIC SERIES - PACKAGING Tape & Reel (TR) PACKAGING Tape & Reel (TR) PACKAGING 24-SOIC (0.295*, 7.50mm Wridth) OTHER NAMES 296-29408-2 CD74HC4067M95-ND OPERATING TEMPERATURE -55°C ~ 125°C (TA) ON-STATE RESISTANCE (MAX) 160 Ohm NUMBER OF CIRCUITS 1 MULTIPLEXER/DEMULTIPLEXER CIRCUIT 16:1 MOISTURE SENSITIVITY LEVEL (MSL) 1 (Unlimited) LEAD FREE STATUS / ROHS STATUS Lead free / ROHS Compliant DETAILED DESCRIPTION 1 Circuit IC Switch 16:1 160 Ohm 24-SOIC CURRENT - LEAKAGE (IS(OFF)) (MAX) 800nA CROSSTALK - CHARGE INJECTION - CHARGE INJECTION 5 PF, 50pF BASE PART NUMBER 74HC4067	QUANTITY AVAILABLE	330491 pcs
VOLTAGE - SUPPLY, DUAL (V±) - SWITCH TIME (TON, TOFF) (MAX) 51ns, 49ns SWITCH CIRCUIT - SUPPLIER DEVICE PACKAGE 24-SOIC SERIES - PACKAGING Tape & Reel (TR) PACKAGE / CASE 24-SOIC (0.295", 7.50mm Width) OTHER NAMES 296-2940-7.2 ODPERATING TEMPERATURE -55°C ~ 125°C (TA) ON-STATE RESISTANCE (MAX) 160 Ohm NUMBER OF CIRCUITS 1 MULTIPLEXER/DEMULTIPLEXER CIRCUIT 16:1 MOISTURE SENSITIVITY LEVEL (MSL) 1 (Unlimited) LEAD FREE STATUS / ROHS STATUS Lead free / ROHS Compliant DETAILED DESCRIPTION 1 Circuit IC Switch 16:1 160 Ohm 24-SOIC CURRENT - LEAKAGE (IS(OFF)) (MAX) 800nA CROSSTALK - CHARGE INJECTION - CHARNEL-TO-CHANNEL MATCHING (ARON) 8.5 Ohm CHANNEL-TO-CHANNEL MATCHING (ARON) 5pf, 50pF BASE PART NUMBER 74HC4067	DATA SHEET	
SWITCH TIME (TON, TOFF) (MAX) SWITCH CIRCUIT SUPPLIER DEVICE PACKAGE 24-SOIC SERIES - PACKAGING Tape & Reel (TR) PACKAGE / CASE 24-SOIC (0.295", 7.50mm Width) OTHER NAMES OPERATING TEMPERATURE OPERATING TEMPERATURE ON-STATE RESISTANCE (MAX) NUMBER OF CIRCUITS I MULTIPLEXER/DEMULTIPLEXER CIRCUIT MOISTURE SENSITIVITY LEVEL (MSL) LEAD FREE STATUS / ROHS STATUS LEAD free / ROHS Compliant DETAILED DESCRIPTION 1 Circuit IC Switch 16:1 160 Ohm 24-SOIC CURRENT - LEAKAGE (IS(OFF)) (MAX) 800nA CROSSTALK CHARGE INJECTION - CHANNEL-TO-CHANNEL MATCHING (ARON) 8.5 Ohm CHANNEL-TO-CHANNEL MATCHING (ARON) 5pf, 50pF BASE PART NUMBER	VOLTAGE - SUPPLY, SINGLE (V+)	2 V ~ 6 V
SWITCH CIRCUIT SUPPLIER DEVICE PACKAGE 24-SOIC SERIES - PACKAGING Tape & Reel (TR) PACKAGE / CASE 24-SOIC (0.295*, 7,50mm Width) OTHER NAMES OTHER NAMES OPERATING TEMPERATURE OPERATING TEMPERATURE ON-STATE RESISTANCE (MAX) NUMBER OF CIRCUITS MULTIPLEXER/DEMULTIPLEXER CIRCUIT MOISTURE SENSITIVITY LEVEL (MSL) LEAD FREE STATUS / ROHS STATUS Lead free / ROHS Compliant DETAILED DESCRIPTION 1 Circuit IC Switch 16:1 160 Ohm 24-SOIC CURRENT - LEAKAGE (IS(OFF)) (MAX) 800nA CROSSTALK - CHANNEL-TO-CHANNEL MATCHING (ARON) 8.5 Ohm CHANNEL-TO-CHANNEL MATCHING (ARON) 8.5 OpF BASE PART NUMBER 74HC4067	VOLTAGE - SUPPLY, DUAL (V±)	-
SUPPLIER DEVICE PACKAGE SERIES - PACKAGING Tape & Reel (TR) PACKAGING Tape & Reel (TR) PACKAGE / CASE 24-SOIC (0.295", 7.50mm Width) OTHER NAMES 296-29408-2 CD74HC4067M96-ND OPERATING TEMPERATURE -55°C ~ 125°C (TA) ON-STATE RESISTANCE (MAX) 160 Ohm NUMBER OF CIRCUITS 1 MULTIPLEXER (DEMULTIPLEXER CIRCUIT 16:1 MOISTURE SENSITIVITY LEVEL (MSL) LEAD FREE STATUS / ROHS STATUS Lead free / ROHS Compliant DETAILED DESCRIPTION 1 Circuit IC Switch 16:1 160 Ohm 24-SOIC CURRENT - LEAKAGE (IS(OFF)) (MAX) 800nA CROSSTALK - CHANGE INJECTION 5PF, 50pF BASE PART NUMBER 74HC4067	SWITCH TIME (TON, TOFF) (MAX)	51ns, 49ns
SERIES - PACKAGING Tape & Reel (TR) PACKAGE / CASE 24-SOIC (0.295", 7.50mm Width) OTHER NAMES 296-29408-2 CD74Hc4067M96-ND OPERATING TEMPERATURE -55°C ~ 125°C (TA) ON-STATE RESISTANCE (MAX) 160 Ohm NUMBER OF CIRCUITS 1 MULTIPLEXER/DEMULTIPLEXER CIRCUIT 16:1 MOISTURE SENSITIVITY LEVEL (MSL) 1 (Unlimited) LEAD FREE STATUS / ROHS STATUS Lead free / ROHS Compliant DETAILED DESCRIPTION 1 Circuit IC Switch 16:1 160 Ohm 24-SOIC CURRENT - LEAKAGE (IS(OFF)) (MAX) 800nA CROSSTALK - CHANNEL-TO-CHANNEL MATCHING (ΔRON) 8.5 Ohm CHANNEL-TO-CHANNEL MATCHING (ΔRON) 5pF, 50pF BASE PART NUMBER 74HC4067	SWITCH CIRCUIT	-
PACKAGING Tape & Reel (TR) PACKAGE / CASE 24-SOIC (0.295", 7.50mm Width) OTHER NAMES 296-29408-2 CD74HC40677M96-ND OPERATING TEMPERATURE -55°C ~ 125°C (TA) ON-STATE RESISTANCE (MAX) 160 Ohm NUMBER OF CIRCUITS 1 MULTIPLEXER/DEMULTIPLEXER CIRCUIT 16:1 MOISTURE SENSITIVITY LEVEL (MSL) 1 (Unlimited) LEAD FREE STATUS / ROHS STATUS Lead free / ROHS Compliant DETAILED DESCRIPTION 1 Circuit IC Switch 16:1 160 Ohm 24-SOIC CURRENT - LEAKAGE (IS(OFF)) (MAX) 800nA CROSSTALK - CHANNEL TO-CHANNEL MATCHING (ARON) 8.5 Ohm CHANNEL CAPACITANCE (CS(OFF), CD(OFF)) 5pF, 50pF BASE PART NUMBER 74HC4067	SUPPLIER DEVICE PACKAGE	24-SOIC
PACKAGE / CASE 24-SOIC (0.295", 7.50mm Width) OTHER NAMES 296-29408-2 CD74HC4067M96-ND OPERATING TEMPERATURE -55°C ~ 125°C (TA) ON-STATE RESISTANCE (MAX) 160 Ohm NUMBER OF CIRCUITS 16:1 MULTIPLEXER/DEMULTIPLEXER CIRCUIT 16:1 MOISTURE SENSITIVITY LEVEL (MSL) LEAD FREE STATUS / ROHS STATUS LEAd free / ROHS Compliant DETAILED DESCRIPTION 1 Circuit IC Switch 16:1 160 Ohm 24-SOIC CURRENT - LEAKAGE (IS(OFF)) (MAX) ROOSSTALK - CHANNEL-TO-CHANNEL MATCHING (ARON) 8.5 Ohm CHANNEL CAPACITANCE (CS(OFF), CD(OFF)) BASE PART NUMBER 74HC4067	SERIES	-
OTHER NAMES296-29408-2 CD74HC4067M96-NDOPERATING TEMPERATURE-55°C ~ 125°C (TA)ON-STATE RESISTANCE (MAX)160 OhmNUMBER OF CIRCUITS1MULTIPLEXER/DEMULTIPLEXER CIRCUIT16:1MOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDETAILED DESCRIPTION1 Circuit IC Switch 16:1 160 Ohm 24-SOICCURRENT - LEAKAGE (IS(OFF)) (MAX)800nACROSSTALK-CHARGE INJECTION-CHARGE INJECTION8.5 OhmCHANNEL-TO-CHANNEL MATCHING (ARON)8.5 OhmCHANNEL CAPACITANCE (CS(OFF), CD(OFF))5pF, 50pFBASE PART NUMBER74HC4067	PACKAGING	Tape & Reel (TR)
CD74HC4067M96-ND OPERATING TEMPERATURE -55°C ~ 125°C (TA) ON-STATE RESISTANCE (MAX) NUMBER OF CIRCUITS MULTIPLEXER/DEMULTIPLEXER CIRCUIT MOISTURE SENSITIVITY LEVEL (MSL) LEAD FREE STATUS / ROHS STATUS LEAd free / RoHS Compliant DETAILED DESCRIPTION 1 Circuit IC Switch 16:1 160 Ohm 24-SOIC CURRENT - LEAKAGE (IS(OFF)) (MAX) ROOSSTALK CHARGE INJECTION - CHANNEL-TO-CHANNEL MATCHING (ΔRON) 8.5 Ohm CHANNEL CAPACITANCE (CS(OFF), CD(OFF)) BASE PART NUMBER 74HC4067	PACKAGE / CASE	24-SOIC (0.295", 7.50mm Width)
ON-STATE RESISTANCE (MAX) NUMBER OF CIRCUITS 1 MULTIPLEXER/DEMULTIPLEXER CIRCUIT 16:1 MOISTURE SENSITIVITY LEVEL (MSL) LEAD FREE STATUS / ROHS STATUS LEAd free / ROHS Compliant DETAILED DESCRIPTION 1 Circuit IC Switch 16:1 160 Ohm 24-SOIC CURRENT - LEAKAGE (IS(OFF)) (MAX) 800nA CROSSTALK CHARGE INJECTION CHANNEL-TO-CHANNEL MATCHING (ARON) 8.5 Ohm CHANNEL CAPACITANCE (CS(OFF), CD(OFF)) BASE PART NUMBER 74HC4067	OTHER NAMES	
NUMBER OF CIRCUITS1MULTIPLEXER/DEMULTIPLEXER CIRCUIT16:1MOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDETAILED DESCRIPTION1 Circuit IC Switch 16:1 160 Ohm 24-SOICCURRENT - LEAKAGE (IS(OFF)) (MAX)800nACROSSTALK-CHARGE INJECTION-CHANNEL-TO-CHANNEL MATCHING (ΔRON)8.5 OhmCHANNEL CAPACITANCE (CS(OFF), CD(OFF))5pF, 50pFBASE PART NUMBER74HC4067	OPERATING TEMPERATURE	-55°C ~ 125°C (TA)
MULTIPLEXER/DEMULTIPLEXER CIRCUIT MOISTURE SENSITIVITY LEVEL (MSL) LEAD FREE STATUS / ROHS STATUS LEAd free / RoHS Compliant DETAILED DESCRIPTION 1 Circuit IC Switch 16:1 160 Ohm 24-SOIC CURRENT - LEAKAGE (IS(OFF)) (MAX) ROONA CROSSTALK - CHARGE INJECTION - CHANNEL-TO-CHANNEL MATCHING (ΔRON) SpF, 50pF BASE PART NUMBER 16:1 1 (Unlimited) 1 (Unlimi	ON-STATE RESISTANCE (MAX)	160 Ohm
MOISTURE SENSITIVITY LEVEL (MSL) LEAD FREE STATUS / ROHS STATUS Lead free / RoHS Compliant DETAILED DESCRIPTION 1 Circuit IC Switch 16:1 160 Ohm 24-SOIC CURRENT - LEAKAGE (IS(OFF)) (MAX) 800nA CROSSTALK - CHARGE INJECTION - CHANNEL-TO-CHANNEL MATCHING (ΔRON) 8.5 Ohm CHANNEL CAPACITANCE (CS(OFF), CD(OFF)) BASE PART NUMBER 74HC4067	NUMBER OF CIRCUITS	1
LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDETAILED DESCRIPTION1 Circuit IC Switch 16:1 160 Ohm 24-SOICCURRENT - LEAKAGE (IS(OFF)) (MAX)800nACROSSTALK-CHARGE INJECTION-CHANNEL-TO-CHANNEL MATCHING (ΔRON)8.5 OhmCHANNEL CAPACITANCE (CS(OFF), CD(OFF))5pF, 50pFBASE PART NUMBER74HC4067	MULTIPLEXER/DEMULTIPLEXER CIRCUIT	16:1
DETAILED DESCRIPTION1 Circuit IC Switch 16:1 160 Ohm 24-SOICCURRENT - LEAKAGE (IS(OFF)) (MAX)800nACROSSTALK-CHARGE INJECTION-CHANNEL-TO-CHANNEL MATCHING (ΔRON)8.5 OhmCHANNEL CAPACITANCE (CS(OFF), CD(OFF))5pF, 50pFBASE PART NUMBER74HC4067	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
CURRENT - LEAKAGE (IS(OFF)) (MAX) ROOSSTALK CHARGE INJECTION CHANNEL-TO-CHANNEL MATCHING (ΔRON) SPF, 50pF BASE PART NUMBER 800nA	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
CROSSTALK CHARGE INJECTION - CHANNEL-TO-CHANNEL MATCHING (ΔRON) CHANNEL CAPACITANCE (CS(OFF), CD(OFF)) BASE PART NUMBER - A A A A A A A A A A A A A A A A A A	DETAILED DESCRIPTION	1 Circuit IC Switch 16:1 160 Ohm 24-SOIC
CHANNEL-TO-CHANNEL MATCHING (ΔRON) 8.5 Ohm CHANNEL CAPACITANCE (CS(OFF), CD(OFF)) 5pF, 50pF BASE PART NUMBER 74HC4067	CURRENT - LEAKAGE (IS(OFF)) (MAX)	800nA
CHANNEL-TO-CHANNEL MATCHING (ΔRON) 8.5 Ohm CHANNEL CAPACITANCE (CS(OFF), CD(OFF)) 5pF, 50pF BASE PART NUMBER 74HC4067	CROSSTALK	-
CHANNEL CAPACITANCE (CS(OFF), CD(OFF)) 5pF, 50pF 74HC4067	CHARGE INJECTION	-
BASE PART NUMBER 74HC4067	CHANNEL-TO-CHANNEL MATCHING (ΔRON)	8.5 Ohm
	CHANNEL CAPACITANCE (CS(OFF), CD(OFF))	5pF, 50pF
-3DB BANDWIDTH 89MHz	BASE PART NUMBER	74HC4067
	-3DB BANDWIDTH	89MHz

Related Tags

CD74HC4067M96 PriceCD74HC4067M96 PicturesCD74HC4067M96 ImageCD74HC4067M96 PDF DatasheetCD74HC4067M96 Download DatasheetCD74HC4067M96 DatasheetCD74HC4067M96 StockBuy CD74HC4067M96Buy CD74HC4067M96CD74HC4067M96SupplierDistributor	CD74HC4067M96	CD74HC4067M96 Distributor	CD74HC4067M96 Supplier
CD74HC4067M96 Stock Buy CD74HC4067M96 Buy CD74HC4067M96	CD74HC4067M96 Price	CD74HC4067M96 Pictures	CD74HC4067M96 Image
	CD74HC4067M96 PDF Datasheet	CD74HC4067M96 Download Datasheet	CD74HC4067M96 Datasheet
CD74HC4067M96 Supplier Distributor	CD74HC4067M96 Stock	Buy CD74HC4067M96	Buy CD74HC4067M96
	CD74HC4067M96	Supplier	Distributor

Related Products

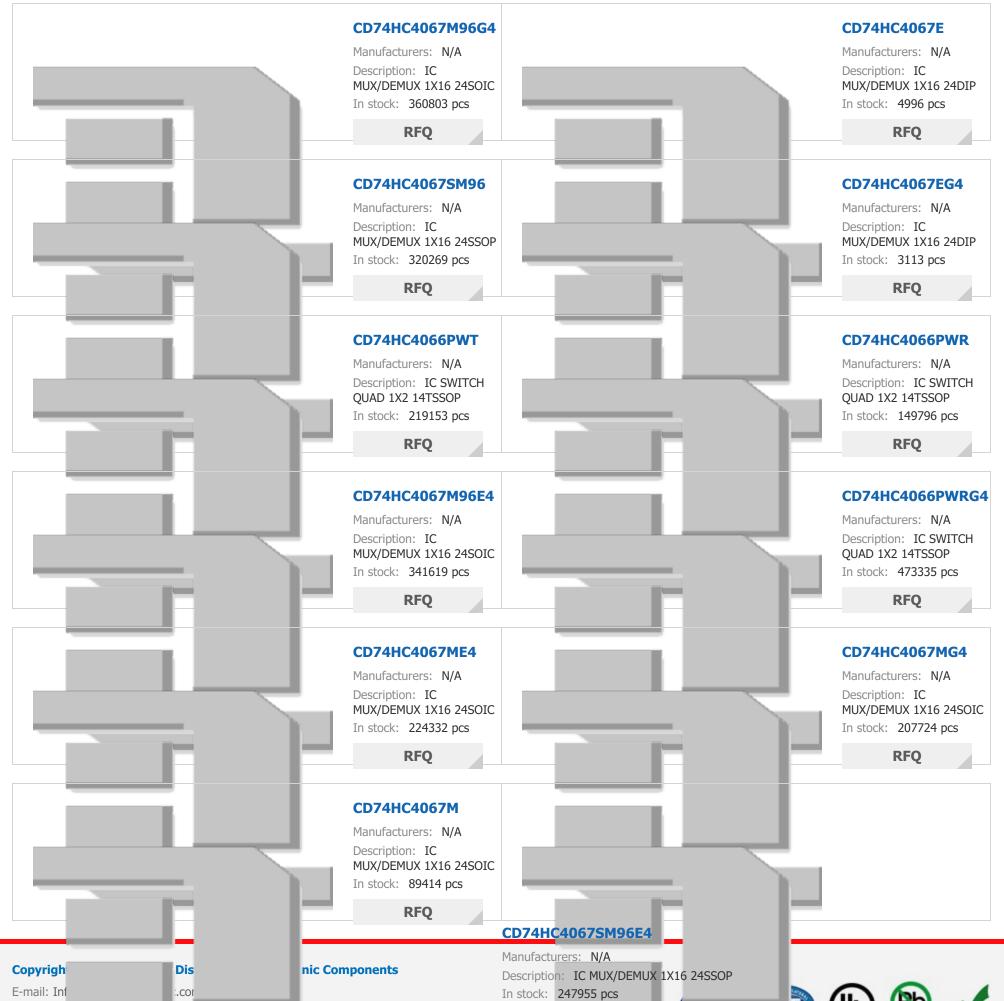

RFQ

cial Building, 114-118 Lockhart Road, Wan Chai, Hong Kong

Address: 1