

Schurter

CPS19-NO00A10-SNCCWTNF-AI0WMVAR-W1004-S

Part Number:	CPS19-NO00A10-SNCCWTNF-AI0WMVAR-W1004-S
Manufacturer/Brand:	Schurter
Product description	SWITCH PUSH SPST-NO 100MA 42V
Datasheets:	CPS19-NO00A10-SNCCWTNF-AI0WMVAR-W1004-S.pdf
RoHs Status	🛃 Lead free / RoHS Compliant
Stock Condition	3151 pcs stock
Ship From	Hong Kong
Shipment Way	DHL/Fedex/TNT/UPS/EMS

REQUEST FOR QUOTATION

Image may be representation. See specifications for product details.

ELECTRONIC COMPONE

Specifications of CPS19-NO00A10-SNCCWTNF-AI0WMVAR-W1004-S


PART NUMBERCPSI9-NODGALIG-SNCCVTTNF-ALDWMVAR-W1004-SMAUUPACTURERSchurberDESCR FREE STATUS / ROHS STATUSKend free / RoHS ComplantQUANTITY AVAILABLE3151 pcDATA SHEETGCSI9-NODGALO-SNCCVTNF-ALDWMVAR-W1004-S.pdfVOLTAGE RATING - DCGOVVOLTAGE RATING - AC42VVOLTAGE RATING - ACWre LeadsSWITCH FUNCTIONOff-MomSREESCPSPARLAGINGGracitive, IlluminatedPARLAGINGGracitive, IlluminatedSWITCH FUNCTIONOff-MomSREESCPSPARLAGINGGracitir - 19 JOND DIaPARLAGINGGracitir - 19 JOND DIaPARLAGINGHold Math, FrontMOUNTING TYPE-LEAD FREE STATUS / ROHS STATUSLead free / RAHS Complant:NORESS RROTECTIONIPG- Dual Tight, WaterproofILLUMINATION VOLTAGE (MOMINAL)5 - 28 VOCLILUMINATION VOLTAGE (MOMINAL)Ceraine Acuator, D SymbolLILUMINATION VOLTAGE (MOMINAL)Pakibator, Moders, TSUNAL SUBMIDFRATLESCeraine Acuator, D SymbolLILUMINATION VOLTAGE (MOMINAL)Pakibator, Moders, D SymbolLILUMINATION TYPE, COLORPakibator, SMITCH Capacitive, Illuminated Panel Mount, FrontLILUMINATION TYPE, COLORCeraine Acuator, D SymbolLILUMINATION TYPE, COLORPakibator, Moders, D SymbolLILUMINATION TYPE, COLORCeraine Acuator, D SymbolLILUMINATION TYPE, COLORPakibator, Moders, D SymbolLILUMINATION TYPE, COLORCeraine Acuator, D SymbolLILUMINATION		
DESCRIPTIONSUTCH PUSH SPST-N0 100MA 42VLEAD FREE STATUS / ROHS STATUSEdd fre/ / ROHS CompliantQUANTTY AVALIABLESID 50DATA SHEETG (PS19-N000AL0-SNCCWTNF-AL0WH/VAR-W1004-5.pdfVOLTAGE RATING - DC6VVOLTAGE RATING - ACGVVOLTAGE RATING - ACGVTYPECapacitive, IlluminatedSIRTISWIF LeadSSWITCH FUNCTIONGPG-100SREESOFSPARL CUTOUT DIMENSIONSGrollar - 19.10mm DiaPACKAGINGHORC - 60°CMOUTING TYPEOPG - 60°CMOUTING TYPE- 100°C 40°C ACGCMOUTING TYPE- 100°C 40°C ACGCMOUTING TYPE- 100°C 40°C ACGCMOUTING TYPE- 20°C 40°CMOUTING TYPE- 100°C 40°C ACGCMOUTING TYPE- 20°C 40°C 40°C ACGCILUMINATION YOUTAGE (MOMINAL)- 20°C 40°C 40°C 40°C 40°C 40°C 40°C 40°C 4	PART NUMBER	CPS19-NO00A10-SNCCWTNF-AI0WMVAR-W1004-S
Lead FREE STATUS / ROHS STATUSLead free / RoHS CompliantQUANTLY AVAILABLE315 psDATA SHEETGPS19-N000A10-SNCCVTNF-ADWHVAR-W1004-S.pdfVOLTAGE RATING - DC6VVOLTAGE RATING - AC42VTYPECapacitive, IlluminatedTREMINATION STYLEWire LeadsSWITCH FUNCTION0Ff-MonSRIESGPSPARL CUTOUT DIMENSIONSGroud - 19.10mm DiaPARL CUTOUT DIMENSIONSGroud - 40°C + 60°CMOUNTING TYPE- 60°C + 60°CMOUNTING TYPE- 61°C + 60°CMOUNTING TYPE- 61°C + 60°CMOUNTING TYPEIdl free/RASCOmpliantMOISTURE SENSITIVITY LEVEL (MSL)Idl free/RASCOmpliantILLUMINATION YOLTAGE (NOMINAL)S78 DECILLUMINATION YOLTAGE (NOMINAL)- 62°CILLUMINATION YOLTAGE (NOMINAL)S78 DECILLUMINATION YOLTAGE (NOMINAL)Carcina Catuator, D SymbolILLUMINATION YOLTAGE (NOMINAL)S78 DECILLUMINATION YOLTAGE (NOMINAL)Carcina Catuator, D SymbolILLUMINATION YOLTAGE (NOMINAL)Nobleton SWICh SPST-NO Capacitive, Illuminated Panel Mount, FrontILLUMINATION YOLTAGE (NOMINAL)S000 (AC/CC)ICLURENT RATINGCarcina Catuator, D SymbolCURRENT RAT	MANUFACTURER	Schurter
QIANTITY AVAILABLE3151 pcsDATA SHEFT© CPS19-N00A10-SNCCVTNF-AL0WMAR-W1004-S.pdfVOLTAGE RATING - DC600VOLTAGE RATING - AC420VOLTAGE RATING - ACGacolity. IlluninatedTRFINATION STYLEKongolity. IlluninatedSWITCH FUNCTIONOff-MonSWITCH FUNCTIONGrade 19.10m DiaPAREL CUTOUT DIMENSIONSColor - 19.10m DiaPAREL CUTOUT DIMENSIONSGrade - 40°C - 60°CMOUNTING TYPEA0°C - 60°CMOUNTING TYPEA100 - 1000 -	DESCRIPTION	SWITCH PUSH SPST-NO 100MA 42V
Dray SHEETCPS19-N00A10-SNCCWTNF-A10WMVAR-W1004-S.pdfVOLTAGE RATING - DC6VVOLTAGE RATING - AC42VTYPECapaditve, IluminatedTRMINATION STYLEWrc LeadsSWTCH FUNCTIONOff-MorSREESCSPARL CUTOUT DIMENSIONSGrolar 1.9.10mm DiaPARLAGINGMaduatOPERATING TEMPERATUREAne C - GO°CMOUNTING TYPEPanel Mount, FrontMOUNTING TYPEAne Mount, FrontMOUNTING TYPEIcularies CompliantMOUNTING TYPEGrolar 2.0.2.LEAD FREE STATUS / ROHS STATUSIcularies CompliantILUMINATION VOLTAGE (NOMINAL)S ~ 28 VDCILUMINATION TYPE, COLORIcun Chausen SprotonILUMINATION TYPE, COLORIcum Chausen SprotonILUMINATIO	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
VOLTAGE RATING - DC60VVOLTAGE RATING - DC42VYURE GRATING - ACCGapakik, IlluniatedTERMINATION STYLEKire LeadsSWITCH FUNCTIONOf-MonSERESGPPANEL CUTOUT DIMENSIONSCirclar - 19.0mm DiaPAREL AUTOUT DIMENSIONSGirclar - 19.0mm DiaPORTATING TEMPERATUREMol ConcertoMOUNTING TYPEAnel Mount, FrontMOUNTING TYPECirclar - ConcertoMOUNTING LIFECirclar - ConcertoILLUMINATION VOLTAGE (NOMINAL)Sere SPACEILLUMINATION VOLTAGE (NOMINAL)Circlar - David Schlar	QUANTITY AVAILABLE	3151 pcs
VOLTAGE RATING - AC42VTYPECapacitve, IlluniatedTREMINATION STYLEWire LeadsSWITCH FUNCTIONOff-MornSERESOFAPAREL CUTOUT DIMENSIONSCirclar + 19.10mm DiaPAREL AUTOUT DIMENSIONSGreckar + 0.90PORTATING TEMPERATUREMol Con 60°CMOUNTING TYPEOre 60°CMOUNTING TYPEOre 60°CMOUNTING TYPEIllunimedoMOSTURE SENSITIVIT LEVEL (MSL)IllunimedoILGAPE STATUS / ROHS STATUSCafe / RAMSCOMplantILGAPES SRATECTIONSA 280CILLUMINATION TYPE, COLORGrain Actuation, DispositionILLUMINATION TYPE, COLORCamic Actuation, DispositionILLUMINATION TYPE, COLORCamic Actuation, Disposition, SimplantILLUMINATION TYPE, COLORCamic Actuation, SimplantILLUMINATION TYPE, C	DATA SHEET	CPS19-NO00A10-SNCCWTNF-AI0WMVAR-W1004-S.pdf
TYECapative JuminatedTREMINATION STYLEWire LeadsSWITCH FUNCTIONOff-MomSWITCH FUNCTIONPOSREESPSANAL CUTOUT DIMENSIONSOkular 19.10m DialPACKAGINOJulian 2000OPERATING TEMPERATUREA0°C 6°CMOUNTING TYPEPanel Mount, FrontMOUNTING TYPEOkular 2000MOSTURE SENSITIVITY LEVEL (MSL)I. (Julimited)ILCHANCLA LIFEOku 2000ILGUINATION VOLTAGE (MOUNLA)SA 20 VCILLUININGTONYEL COLORGANICALGUELIPICILLUININGTONYEL COLORSA 20 VCILLUININGTONYEL COLORCondicatod SPST-MOLAGUELIPICILLUININGTONYEL COLORSA 2000ILLUININGTONYEL COLORSA 2000ILLUININGTONYEL COLORCondicatod SPST-MOLAGUELIPICILLUININGTONYEL COLORSIGNACHADENST-MOLAGUELIPICILLUININGTONYEL COLORSIGNACHADENST-MOLAGUELIPIC <tr< td=""><td>VOLTAGE RATING - DC</td><td>60V</td></tr<>	VOLTAGE RATING - DC	60V
TRMINATION STVEWie leadsSWITCH FUNCTIONGif-MomSWITCH FUNCTIONCPGPARL CUTOUT DIMENSIONSGiclar 1.0.0m DiaPACKAGINGGiclar 1.0.0m DiaPACKAGINGGiclar 4.0.0m DiaMOUNTING TEMPERATUREGinel And ConcolMOUNTING TYPEI.0.1.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.	VOLTAGE RATING - AC	42V
SWITCH FUNCTIONOff-MomSKRESC9PANEL CUTOUT DIMENSIONSColora 19.00m DiaPACKAGINGAlkOPERATING TEMPERATUREAl%C A GOCMOUNTING TYPEPand Mount FontMOSTURE SENSITIVIT LEVEL (MSL)(InlimitedMCARAGE SENSITIVIT SEN	TYPE	Capacitive, Illuminated
SERIESPSPARL CUTOUT DIMENSIONSCoder 19.10m DiaPACKAGINGBikPORTATING TEMPERATURE-0°C °C °	TERMINATION STYLE	Wire Leads
PAREL CUTOUT DIMENSIONSCircular 19.10mm DiaPACKAGINGBulkPORATING TEMPERATURE-00°C - 00°CMOUNTING TYPEPanel Mount, FrontMOSTURE SENSTIVITY LEVEL (MSL)(Inlimited)MECHANICAL LIFE-LAD FREE STATUS / ROHS STATUSEdife / ROHS CompliantILUMINATION VOLTAGE (NOMINAL)5 ~ 28 VCILUMINATION VVOLTAGE (NOMINAL)Edir Actuard, DisymbolFEATURESCarana Catuard, DisymbolFLATURES-ILUMINATION TYPE, COLORNohton Status / SymbolILUMINATION TYPE, COLOR-CIRRENT RATINGNohton Status / SymbolCIRRENT RATINGComic Actuard, DisymbolCIRRENT RATINGOm (Act/DC)CIRRENT RATINGGar (With Filter/Diffuser)COLOR - ACTUATOR/CAPSTANOSymbolSymbolCIRRENT RATINGSymbolCIRRENT RATING <td< td=""><td>SWITCH FUNCTION</td><td>Off-Mom</td></td<>	SWITCH FUNCTION	Off-Mom
PACKAGINGBulkPACKAGING40° A 0° A° A°OPERATING TEMPERATURE40° A 0° A°MOUNTING TYPEPanel Mount, FrontMOISTURE SENSITIVIT LEVEL (MSL)101 (Inited)MCHANICAL LIFE-LEAD FREE STATUS / ROHSTATUSIcof Panel Mount, PontILUMINATION VOLTAGE (NOMINAL)FA' DAUT (Magenta)ILUMINATION VOLTAGE (NOMINAL)Camica Actionary Day Mount, PontFEATURESIconary Day Mount, Day Mount, PontILUMINATION TYPE, COLORIconary Mount, Day Mount, PontILUMINATION TYPE, COLORIconary Mount, Day Mount, PontILUMINATION TYPE, COLORIconary Mount, PontICTICAL LIFEIconary Mount, PontICTICAL LIFE </td <td>SERIES</td> <td>CPS</td>	SERIES	CPS
OPERATING TEMPERATURE-4°C ~ 6°CMOUNTING TYPEPael Mount, FrontMOISTURE SENSITIVTY LEVEL (MSL)I (Ulimited)MECHANICA LIFE-LEAD FREE STATUS / ROHS STATUSBael for / ROHS CompliantINRESS PROTECTION5 ~ 28 VDCILUMINATION VOLTAGE (NOMINAL)ED (Nik MagentaFATURESCamica Action y Song Song Song Song Song Song Song Song	PANEL CUTOUT DIMENSIONS	Circular - 19.10mm Dia
MOUNTING TYPEPanel Mount, FrontMOISTURE SENSITIVITY LEVEL (MSL)(Iulimited)MECHANICAL LIFE-LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILIDATION YOLTAGE (NOMINAL)P67 - Dust Tight, WaterproofILLUMINATION VOLTAGE (NOMINAL)S - 28 VDCILLUMINATION TYPE, COLORLeo Honk (Magenta)FATURESCeranic Actuator, D SymbolIECTRICAL LIFE-ICTRICENTIONSubuton Status (Mine Magenta)ILLUMINATION TYPE, COLORMibiton Status (Mine Magenta)FATURESCeranic Actuator, D SymbolICTRICAL LIFE-ICTRICENTIONSubuton Status (Mine Magenta)CURRENT RATINGComo (Mine Magenta)COLOR - ACTUATOR/CAPCera (Mine Filter/Diffuser)CIGUR - ACTUATOR/CAPSey NOMSey NOMSey NOM	PACKAGING	Bulk
MOISTURE SENSITIVITY LEVEL (MSL) MCHANICAL LIFE ICA C MARCENALISE ICA	OPERATING TEMPERATURE	-40°C ~ 60°C
MECHANICAL LIFE-LEAD FREE STATUS / ROHS STATUSEdaf re / ROHS CompliantINGRESS PROTECTIONID6 - Dust Tight, WaterproofLLUMINATION VOLTAGE (NOMINAL)S ~ 28 VDCLLUMINATION TYPE, COLORED, White/MagentaFEATURESCaranic Actuator, D SymbolELECTRICAL LIFE-CURRENT RATINGWind Switch SPST-NO Capacity JIII JIIII AGUCURRENT RATINGGar (White Fliet/Diffuser)CLOR - ACTUATOR/CAPGar (White Fliet/Diffuser)CURCH TATURGSps-NO	MOUNTING TYPE	Panel Mount, Front
LAD FREE STATUS / ROHS STATUS Ead free / ROHS Compliant INGRESS PROTECTION IPG - Dast Tight, Waterproof ILLUMINATION VOLTAGE (NOMINAL) 5 ~ 28 VDC ILLUMINATION TYPE, COLOR ED, Wite/Magenta FATURES Ceranic Actuator, D Symbol ILLOR SCRIPTION Nobleton Statuscy, D Symbol CIRRENT RATING Obsolution Statuscy, D Symbol COLOR - ACTUATOR/CAP Obsolution Statuscy, D Symbol CIRCUT Statuscy, D Symbol CIRCUT Statuscy, D Symbol	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
INGRESS PROTECTION IP67- Dust Tight, Waterprof ILLUMINATION VOLTAGE (NOMINAL) 5 ~ 28 VDC ILLUMINATION TYPE, COLOR LED, White/Magenta FEATURES Ceranic Actuator, D Symbol IELECTRICAL LIFE - ICURRENT RATING Nom (AC/DC) CURRENT RATING Dom (Ac/DC) CLOR - ACTUATOR/CAP Ger (White Filter/Diffuser) CIRCUT Sps-NO	MECHANICAL LIFE	-
ILLUMINATION VOLTAGE (NOMINAL)5 ~ 28 VDCILLUMINATION TYPE, COLORED, White/MagentaFEATURESCaranic Actuator, D SymbolFLECTRICAL LIFE-OLTATLED DESCRIPTIONPohlotton SymbolCURRENT RATINGDiom (AC/DC)COLOR - ACTUATOR/CAPBist-NOCINCUTSymbol	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ILLUMINATION TYPE, COLOR ED, White/Magenta FEATURES Ceramic Actuator, D Symbol ELECTRICAL LIFE - DETAILED DESCRIPTION Pushbutton Systich SPST-NO Capacitive, Illuminated Panel Mount, Front CURRENT RATING 100mA (AC/DC) COLOR - ACTUATOR/CAP Ceramic Mitter Sister Sist	INGRESS PROTECTION	IP67 - Dust Tight, Waterproof
FATURESCeramic Actuator, D SymbolELECTRICAL LIFE-DETAILED DESCRIPTIONWishoth SPST-NO Capacitive, JIluminated Panel Mount, FrontCURRENT RATING10mA (AC/DC)COLOR - ACTUATOR/CAPCera (Wishoth Filter/Diffuser)CIRCUITSPST-NO	ILLUMINATION VOLTAGE (NOMINAL)	5 ~ 28 VDC
ELECTRICAL LIFE-DETAILED DESCRIPTIONPushbutton SPST-NO Capacitive, Illuminated Panel Mount, FrontCURRENT RATING100mA (AC/DC)COLOR - ACTUATOR/CAPClear (White Filter/Diffuser)CIRCUITSPST-NO	ILLUMINATION TYPE, COLOR	LED, White/Magenta
DETAILED DESCRIPTION Pushbutton SPST-NO Capacitive, Illuminated Panel Mount, Front CURRENT RATING 100mA (AC/DC) COLOR - ACTUATOR/CAP Clear (White Filter/Diffuser) CIRCUIT SPST-NO	FEATURES	Ceramic Actuator, D Symbol
CURRENT RATING100mA (AC/DC)COLOR - ACTUATOR/CAPClear (White Filter/Diffuser)CIRCUITSPST-NO	ELECTRICAL LIFE	-
COLOR - ACTUATOR/CAP Clear (White Filter/Diffuser) CIRCUIT SPST-NO	DETAILED DESCRIPTION	Pushbutton Switch SPST-NO Capacitive, Illuminated Panel Mount, Front
CIRCUIT SPST-NO	CURRENT RATING	100mA (AC/DC)
	COLOR - ACTUATOR/CAP	Clear (White Filter/Diffuser)
ACTUATOR TYPE Round, Button, Flush	CIRCUIT	SPST-NO
	ACTUATOR TYPE	Round, Button, Flush

Related Tags

Schurter CPS19-NO00A10-SNCCWTNF-AI0WMVAR- W1004-S	CPS19-NO00A10-SNCCWTNF-AI0WMVAR-W1004-S Distributor	CPS19-NO00A10-SNCCWTNF-AI0WMVAR-W1004-S Supplier
CPS19-NO00A10-SNCCWTNF-AI0WMVAR-W1004-S Price	CPS19-NO00A10-SNCCWTNF-AI0WMVAR-W1004-S Pictures	CPS19-NO00A10-SNCCWTNF-AI0WMVAR-W1004-S Image
CPS19-NO00A10-SNCCWTNF-AI0WMVAR-W1004-S PDF Datasheet	CPS19-NO00A10-SNCCWTNF-AI0WMVAR-W1004-S Download Datasheet	CPS19-NO00A10-SNCCWTNF-AI0WMVAR-W1004-S Datasheet
CPS19-NO00A10-SNCCWTNF-AI0WMVAR-W1004-S Stock	Buy CPS19-NO00A10-SNCCWTNF-AI0WMVAR-W1004-S	Buy Schurter CPS19-NO00A10-SNCCWTNF-AI0WMVAR- W1004-S
Schurter CPS19-NO00A10-SNCCWTNF-AI0WMVAR- W1004-S	Schurter Supplier	Schurter Distributor
Schurter CPS19-NO00A10-SNCCWTNF-AI0WMVAR- W1004-S	Schurter Inc. CPS19-NO00A10-SNCCWTNF-AI0WMVAR- W1004-S	

Related Products

	CPS19-NO00A10-SNCCWTNF-AI0WMVAR- W1007-S		CPS19-NO00A10-SNCCWTNF-AI0WMVAR- W1009-S	
	Manufacturers: Schurter Description: SWITCH PUSH SPST-NO 100MA 42V In stock: 7024 pcs	SCHURTER	Manufacturers: Schurter Description: SWITCH PUSH SPST-NO 100MA 42V In stock: 4530 pcs	
	RFQ		RFQ	
	CPS19-NO00A10-SNCCWTNF-AI0WGVAR- W1076-S		CPS19-NO00A10-SNCCWTNF-AI0WMVAR- W1005-S	
Manufacturers: Schurter Description: SWITCH PUSH SPST-N In stock: 6787 pcs	Description: SWITCH PUSH SPST-NO 100MA 42V	NO 100MA 42V	Manufacturers: Schurter Description: SWITCH PUSH SPST-NO 100MA 42V In stock: 2743 pcs	
	RFQ		RFQ	
	CPS19-NO00A10-SNCCWTNF-AI0WMVAR- W1003-S		CPS19-NO00A10-SNCCWTNF-AI0WMVAR- W1006-S	
	Manufacturers: Schurter Description: SWITCH PUSH SPST-NO 100MA 42V In stock: 6447 pcs		Manufacturers: Schurter Description: SWITCH PUSH SPST-NO 100MA 42V In stock: 4826 pcs	

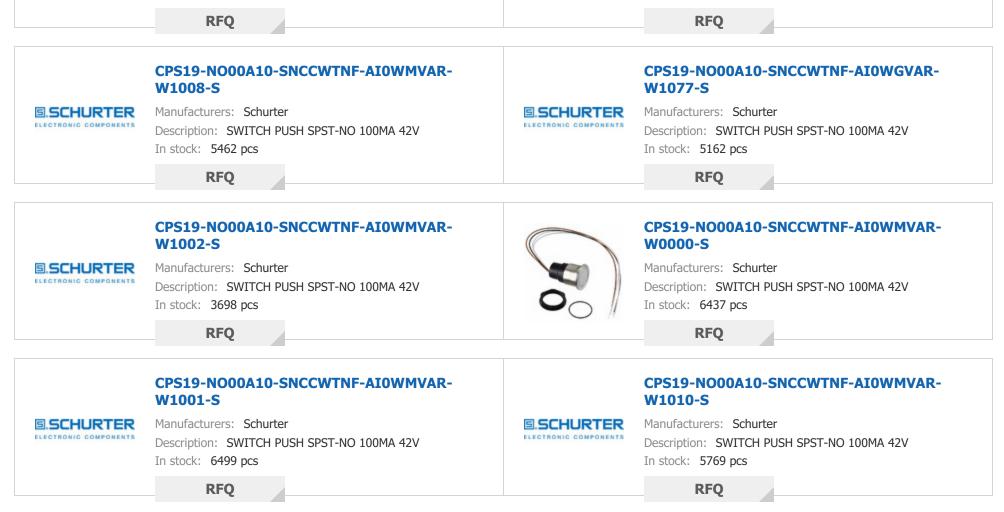

Copyright © 2020 Reliable Distributor of Electronic Components

E-mail: Info@infinity-electronic.com

Address: 17F, Gaylord Commercial Building, 114-118 Lockhart Road, Wan Chai, Hong Kong

