Image may be representation. See specifications for product details.

IMB08-04NNPVC0S

Datasheets:

Part Number: IMB08-04NNPVC0S

Manufacturer/Brand: N/A

Product description SEN PROX NON-FLSH NPN COMP M12

Stock Condition 1155 pcs stock

Ship From Hong Kong

Shipment Way DHL/Fedex/TNT/UPS/EMS


REQUEST FOR QUOTATION

PART NUMBER IMB08-04NNPVCOS MANUFACTURER N/A DESCRIPTION SEN PROX NON-FLSH NPN COMP M12 LEAD FREE STATUS / ROHS STATUS UMATURY AVAILABLE QUANTITY AVAILABLE 1155 pcs DATA SHEET Connector VOLTAGE - SUPPLY 10 V ~ 30 V TERMINATION STYLE Connector SHIELDING Shielded SERIES - SENSOR TYPE Inductive SENSING DISTANCE 0.157" (4mm) RESPONSE FREQUENCY 4kHz PACKAGE / CASE Cylinder, Threaded - M8 OUTPUT TYPE NPN-NC/NO, 4-Wire OTHER NAMES 1074353 OPERATING TEMPERATURE -40°C ~ 100°C (TA) MATERIAL - BODY Plastic INDICATOR LED DETAILED DESCRIPTION Inductive Proximity Sensor 0.157" (4mm) IP68, IP69K Cylinder, Threaded - M8		Specifications of IMB08-04NNPVC0S
MANUFACTURER DESCRIPTION SEN PROX NON-FLSH NPN COMP M12 LEAD FREE STATUS / ROHS STATUS QUANTITY AVAILABLE DATA SHEET VOLTAGE - SUPPLY 10 V ~ 30 V TERMINATION STYLE Connector SHIELDING SHIELDING SERIES - SENSOR TYPE Inductive SENSING DISTANCE RESPONSE FREQUENCY AkHz PACKAGE / CASE OLIPUT TYPE OPERATING EMPERATURE OPERATING TEMPERATURE AGPC ~ 100°C (TA) MATERIAL - BODY INDICATOR SEN POX NON-FLSH NPN COMP M12 SEN PROX NON-FLSH NPN COMP M12 SEN PROX NON-FLSH NPN COMP M12 INGRESS PROTECTION INDICATOR IN		
DESCRIPTION SEN PROX NON-FLSH NPN COMP M12 LEAD FREE STATUS / ROHS STATUS QUANTITY AVAILABLE 1155 pcs DATA SHEET VOLTAGE - SUPPLY 10 V ~ 30 V TERMINATION STYLE Connector SHIELDING Shielded SERIES - SENSOR TYPE Inductive SENSING DISTANCE 0.157" (4mm) RESPONSE FREQUENCY 4kHz PACKAGE / CASE Cylinder, Threaded - M8 OUTPUT TYPE NPN-C/NO, 4-Wire OTHER NAMES 1074353 OPERATING TEMPERATURE 40°C ~ 100°C (TA) MATERIAL - BODY PLASS IN 1968, IP69K INDICATOR 1 IS59 INGRESS PROTECTION LED INGRESS PROTECTION LED INGRESS PROTECTION LED INGRESS PROTECTION LED ISSON NON-FLSH NPN COMP M12 ISSON NON-FLSH NEW COMP M12	PART NUMBER	IMB08-04NNPVC0S
QUANTTY AVAILABLE 1155 pcs DATA SHEET VOLTAGE - SUPPLY 10 V ~ 30 V TERMINATION STYLE Connector SHIELDING Shielded SERIES - SENSOR TYPE Inductive SENSING DISTANCE SLUPELY 4KHz ACKAGE / CASE Cylinder, Threaded - M8 OUTPUT TYPE NAMES 1074353 OPERATING TEMPERATURE -40°C ~ 100°C (TA) MATERIAL - BODY PLASS AND AS	MANUFACTURER	N/A
QUANTITY AVAILABLE DATA SHEET VOLTAGE - SUPPLY 10 V ~ 30 V TERMINATION STYLE Connector SHIELDING Shielded SERIES - SENSOR TYPE Inductive SENSING DISTANCE SENSING DISTANCE AVAILABLE SENSORY FREQUENCY AVAILABLE AVAILABLE OUTPUT TYPE NPN-NC/NO, 4-Wire OTHER NAMES OPERATING TEMPERATURE MATERIAL - BODY INGRESS PROTECTION INDICATOR INDICATOR INDICATOR INDICATOR INDICATOR IND	DESCRIPTION	SEN PROX NON-FLSH NPN COMP M12
DATA SHEET VOLTAGE - SUPPLY 10 V ~ 30 V TERMINATION STYLE Connector SHIELDING SHIELDING SHIELDING SERIES - SENSOR TYPE Inductive SENSING DISTANCE OLIST" (4mm) RESPONSE FREQUENCY 4kHz PACKAGE / CASE OUTPUT TYPE NPN-NC/NO, 4-Wire OTHER NAMES OPERATING TEMPERATURE MATERIAL - BODY NPASH MATERIAL - BODY NPASH INDICATOR INDICATOR INDICATOR INDICATOR INDICATOR INDICATOR INDICATOR OCONE Connector Analy Analy All Analy	LEAD FREE STATUS / ROHS STATUS	
VOLTAGE - SUPPLY TERMINATION STYLE Connector SHIELDING Shielded SERIES - SENSOR TYPE Inductive SENSING DISTANCE 0.157" (4mm) RESPONSE FREQUENCY 4kHz PACKAGE / CASE Cylinder, Threaded - M8 OUTPUT TYPE OTHER NAMES OPERATING TEMPERATURE MATERIAL - BODY INGRESS PROTECTION IP68, IP69K INDICATOR Connector Connector Inductive Connector Inductive Anductive Anductive Inductive Anductive Anducti	QUANTITY AVAILABLE	1155 pcs
TERMINATION STYLE SHIELDING SHIELDING SERIES - SENSOR TYPE Inductive SENSING DISTANCE SENSING DISTANCE RESPONSE FREQUENCY PACKAGE / CASE OUTPUT TYPE OTHER NAMES OUTPUT TYPE OTHER NAMES OPERATING TEMPERATURE MATERIAL - BODY INGRESS PROTECTION INGRESS PROTECTION INDICATOR Connector Inductive Induct	DATA SHEET	
SHIELDING SERIES - SENSOR TYPE Inductive SENSING DISTANCE O.157" (4mm) RESPONSE FREQUENCY 4kHz PACKAGE / CASE OLIPUT TYPE NPN-NC/NO, 4-Wire OTHER NAMES OUTPUT TYPE A0°C ~ 100°C (TA) MATERIAL - BODY INGRESS PROTECTION INGRESS PROTECTION INDICATOR Sensing Distance Inductive Inductiv	VOLTAGE - SUPPLY	10 V ~ 30 V
SERIES SENSOR TYPE Inductive O.157" (4mm) RESPONSE FREQUENCY AKHZ PACKAGE / CASE OUTPUT TYPE NPN-NC/NO, 4-Wire OTHER NAMES OPERATING TEMPERATURE MATERIAL - BODY INGRESS PROTECTION IP68, IP69K INDICATOR	TERMINATION STYLE	Connector
SENSOR TYPE SENSING DISTANCE RESPONSE FREQUENCY 4kHz PACKAGE / CASE Cylinder, Threaded - M8 OUTPUT TYPE NPN-NC/NO, 4-Wire OTHER NAMES OPERATING TEMPERATURE MATERIAL - BODY INGRESS PROTECTION INGRESS PROTECTION INDICATOR Inductive 1.157" (4mm) AkHz Cylinder, Threaded - M8 Cylind	SHIELDING	Shielded
SENSING DISTANCE RESPONSE FREQUENCY AKHZ PACKAGE / CASE OUTPUT TYPE OTHER NAMES OPERATING TEMPERATURE MATERIAL - BODY INGRESS PROTECTION INDICATOR D.157" (4mm) 4kHz AkHZ AkHZ Cylinder, Threaded - M8 NPN-NC/NO, 4-Wire NPN-NC/NO, 4-Wire 1074353 40°C ~ 100°C (TA) Plastic IP68, IP69K LED	SERIES	-
RESPONSE FREQUENCY AkHz PACKAGE / CASE Cylinder, Threaded - M8 OUTPUT TYPE NPN-NC/NO, 4-Wire OTHER NAMES OPERATING TEMPERATURE A0°C ~ 100°C (TA) MATERIAL - BODY INGRESS PROTECTION IP68, IP69K INDICATOR	SENSOR TYPE	Inductive
PACKAGE / CASE OUTPUT TYPE NPN-NC/NO, 4-Wire OTHER NAMES OPERATING TEMPERATURE -40°C ~ 100°C (TA) MATERIAL - BODY Plastic INGRESS PROTECTION IP68, IP69K INDICATOR	SENSING DISTANCE	0.157" (4mm)
OUTPUT TYPE NPN-NC/NO, 4-Wire OTHER NAMES 1074353 OPERATING TEMPERATURE -40°C ~ 100°C (TA) MATERIAL - BODY Plastic INGRESS PROTECTION IP68, IP69K INDICATOR LED	RESPONSE FREQUENCY	4kHz
OTHER NAMES 1074353 OPERATING TEMPERATURE -40°C ~ 100°C (TA) MATERIAL - BODY Plastic INGRESS PROTECTION IP68, IP69K INDICATOR LED	PACKAGE / CASE	Cylinder, Threaded - M8
OPERATING TEMPERATURE -40°C ~ 100°C (TA) MATERIAL - BODY Plastic INGRESS PROTECTION IP68, IP69K INDICATOR LED	OUTPUT TYPE	NPN-NC/NO, 4-Wire
MATERIAL - BODY Plastic INGRESS PROTECTION IP68, IP69K INDICATOR LED	OTHER NAMES	1074353
INGRESS PROTECTION IP68, IP69K INDICATOR LED	OPERATING TEMPERATURE	-40°C ~ 100°C (TA)
INDICATOR LED	MATERIAL - BODY	Plastic
	INGRESS PROTECTION	IP68, IP69K
DETAILED DESCRIPTION Inductive Proximity Sensor 0.157" (4mm) IP68, IP69K Cylinder, Threaded - M8	INDICATOR	LED
	DETAILED DESCRIPTION	Inductive Proximity Sensor 0.157" (4mm) IP68, IP69K Cylinder, Threaded - M8

Related Tags

IMB08-04NNPVC0S Price IMB08-	04NNPVC0S Pictures	IMB08-04NNPVC0S Image
IMB08-04NNPVC0S PDF Datasheet IMB08-	04NNPVC0S Download Datasheet	IMB08-04NNPVC0S Datasheet
IMB08-04NNPVC0S Stock Buy IMI	B08-04NNPVC0S	Buy IMB08-04NNPVC0S
IMB08-04NNPVC0S Supplie	r	Distributor

Related Products

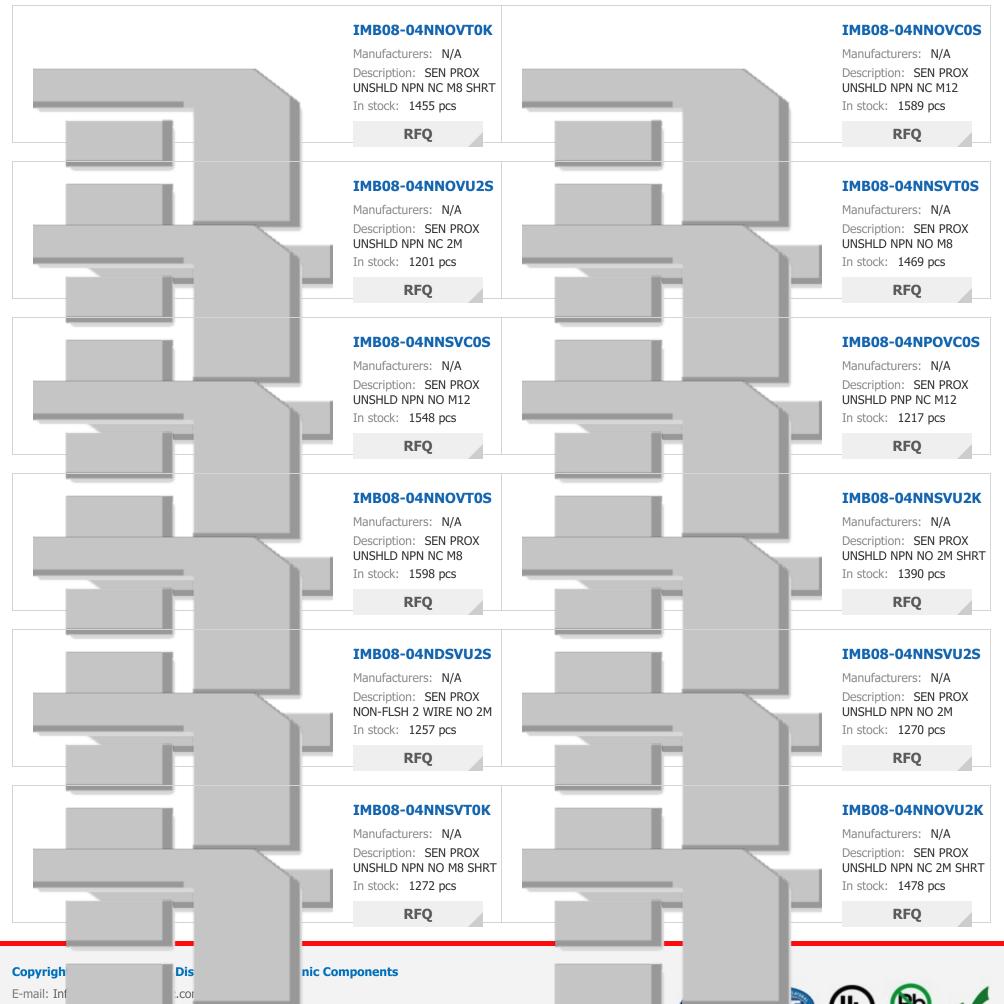

cial Building, 114-118 Lockhart Road, Wan Chai, Hong Kong

Address: 1