S-4010TB Details PDF

infinity-electronic



Image may be representation. See specifications for product details.

S-4010TB

Part Number:	S-4010TB	
Manufacturer/Brand:	Copal Electronics	
Product description	SWITCH ROTARY DIP BCD 100MA 2.4V	
Datasheets:	100 S-4010TB.pdf	
RoHs Status	💒 Lead free / RoHS Compliant	
Stock Condition	37876 pcs stock	
Ship From	Hong Kong	
Shipment Way	DHL/Fedex/TNT/UPS/EMS	

REQUEST FOR QUOTATION


Specifications of S-4010TB

<table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-row><table-row><table-row><table-row></table-row><table-row><table-row><table-container></table-container></table-row><table-row><table-row></table-row></table-row><table-row><table-row></table-row><table-row></table-row><table-row></table-row><table-row></table-row><table-row></table-row><table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container>		
DESCRIPTIONSVITCH RATRY DIP RCD 100HA 2.4VLEAD FREE STATUS / ROHS STATUSLead free / ROHS ComplientQUANTITY AVAILABLE3787 pcsDATA SHEETS-9101TB.pdfWASHARENoVOLTAGE RATING2.4VOCTERNINATION STYLEGII WingSERES54000 (1.27m), HeffPITCHGoo (1.27m), HeffPACKARGSol (1.27m), HeffPARATRYSol (1.27m), HeffOTHER NAMESGIALABASEOWHERE OF POSITIONSSol (1.27m), HeffMOVEREA FROM COMPLACIONSSol (1.27m), HeffOWHERE FROM COMPLACIONSSol (1.27m), HeffOWHERE A FROM COMPLACIONSSol (1.27m), HeffMOVEREA INFORMATIONSSol (1.27m), HeffLEAD FREE STATUS / ROHS STATUSSol (2.60m)FEATURESSol (2.60m)FEATURESSol (2.60m)FEATURESSol (2.60m)FEATURESSol (2.60m)FEATURESSol (2.60m)FEATURESSol (2.60m)FEATURESSol (2.60m)GUARDATERIALSol (2.60m)GUARDATERIALSol (2.60	PART NUMBER	S-4010TB
LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantQUANTLY AVALLABLE3787 pcsDATA SHEETRsVASHABLENoVOLTAGE RATING4.400CSTRININATION STYLEGIU WingSREIS5.000PITCH0.500° (1.27m, HaftPACAGINGTape Real (TR)OTHER NAMES6.56.1248-2OTHER NAMES5.66.1248-2OPERATING TEMPERATURE6.56.1248-2OPERATING TEMPERATURE6.56.1248-2ONUMITOR TYPE3.66.1248-2MOUNTING TYPE0.100 NortholdMOUNTING TYPE0.101 NortholdMOUNTING TYPE0.101 NortholdMOUNTING TYPE0.102 NortholdLEAD FREE STATUS / ROHS STATUS1.011 NortholdLEAD FREE STATUS / ROHS STATUS1.021 NortholdLEAD FREE STATUS / ROHS STATUS <td>MANUFACTURER</td> <td>Copal Electronics</td>	MANUFACTURER	Copal Electronics
QUANITY AVAILABLE3787 psDATA SHETSch0108 pdfDATA SHETNoVOLTAGE RATINGAVOCSERIESS4000PITCH0.50° (1.27m), HalfPACAGINGTge Red (TR)OTHER NAMESSch02 of C, 20°COTHER NAMESSch02 of C, 20°COTHER NAMESSch02 of C, 20°COTHER NAMESSch02 of C, 20°CNUMEER OF POSITIONSIMOUTING TYPESch02 of C, 20°CNUMEER OF POSITIONSIMOUTING TYPESch02 of C, 20°CNUMEER SCH03 OF C, 20°CSch02 o	DESCRIPTION	SWITCH ROTARY DIP BCD 100MA 2.4V
DATA SHEETSe 4940186.effWASHABLENoVOLTAGE PATING2.4VDCVOLTAGE PATINGGalWagSTERISGalWagSTERISSerioPACAGINGMSO* (1.27mm, HalfPACAGINGSof (1.27mm, HalfPACKAGINGSof (1.27mm, HalfPACKAGINGSof (1.27mm, HalfOTHER NAMESSof (1.27mm, HalfNUMER OF POSITIONSSof (1.27mm, HalfNUMER OF POSITIONSSof (1.27mm, HalfMOUNTING TYPESof (1.27mm, HalfMOUNTING TYPESof (1.27mm, HalfMOUNTING TYPESof (1.27mm, HalfMICHANCAL LIFESof (1.27mm, HalfLIGT HABOVE BOARDSof (1.27mm, HalfELGT RAD NE BOARDSof (1.27mm, HalfELGT RAD NE BOARDSof (1.27mm, HalfCARENT RATINGSof (1.27mm, HalfCARENT RATING	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
washalewashalewavotrace rating2.vtoctreinkation StrikeGil WigstreisSoloprodu0.storproduSoloproduSoloproduction StrikeSoloprearatingSoloprearatingSoloorter AnkesSoloorter AnkesSolofort AnkesSolo<	QUANTITY AVAILABLE	37876 pcs
VICTAGE RATING2.NDCTERNINATION STYLEGUIVINGSERIES-400PICH0.SO'(1.27m), HalfPACKAGINGTak Red (TR)OPERATINGSall 248-2OTHEN NAMES-295C 'AO'COPERATING TEMPERATURE-295C 'AO'CNUMERE OF DOSTINOTSSalf 46 MountMOUNTING TYPESalf 46 MountMOISTURE SENSTITUT LEVEL (MSL)I (Milmited)IEGTATAGE ENSTITUT LEVEL (MSL)I (Milmited)LENGTH1.99'(4.80m)LENGTHI (Salf 26 MountIEGTATAGE ENSTITUT LEVEL (MSL)I (Salf 26 Mount Active Tool Active 100m A 2.4VDCIEGTATAGE ENSTITUT LEVEL (MSL)I (Salf 26 Mount Active Tool Active 100m A 2.4VDCIEGTATAGE ENSTITUT LEVEL (MSL)I (Salf 26 Mount Active Tool Active 100m A 2.4VDCIEGTATAGE ENSTITUT LEVEL (MSL)I (Salf 26 Mount Active 100 Mount A 2.4VDCIEGTATAGE ENSTITUT LEVEL (MSL)I (Salf 26 Mount Active 100 Mount A 2.4VDCIEGTATAGE ENSTITUT LEVEL (MSL)I (Salf 26 Mount Active 100 Mount A 2.4VDCIEGTATAGE ENSTITUT LEVEL (MSL)I (Salf 26 Mount Active 100 Mount A 2.4VDCIEG	DATA SHEET	S-4010TB.pdf
TerritrationGiulingStress5400Pirteh050° (1.27m, HalfPackaGINGTea Rea (TR)ortier Names531248-3Orter Names531248-3Number Or PostTros25° < 7°C	WASHABLE	No
SRIESS400PITH0.50° (1.27m), HalfPACAGINGS60° (1.27m), FAITPACAGINGS60° (1.27m), FAITOTHER NAMESS61° (1.27m), FAITOPERATING TEMPERATURE0NUMERC OF OSTITONS0MOUTING TYPEGarde MondeMOUTING TYPE(1.01imed)MOLTANG LIFE.LIGATA RATURS1.01° (1.01m)LIGAT RATURS.LIGAT RATURS.LIGAT RATURS.LIGAT RATURS.LIGAT RATURS.LIGAT RATURS.LIGAT RATURS.LIGAT RATURS.CIARENT RATURS. <td< td=""><td>VOLTAGE RATING</td><td>2.4VDC</td></td<>	VOLTAGE RATING	2.4VDC
PTCH0.60° (1.27m), HaffPACKAGINGFAG KAG ITAROTHER NAMESSal 248°.2OTHER NAMESSal 248°.2OPERATING TEMPERATURESal 26 ~ 0°CNUMBER OF POSITIONSGNGMOUNTING TYPESal Cad MontMOUNTING TYPE(Julinite)MCHANICAL LIFEJ.01LIGTHJ.01LENGTHJ.02LIGTH ADOVE DOARDJ.02LIGTH ADOVE DOARDJ.02LIGTA GROMEJ.02LIGTA TATUSJ.02LIGTA TATUSJ.02LIGTA TATUSJ.02CATARTINGJ.02CATARTINGJ.02CATARTATINGJ.02CATARTATINGJ.02CATARTATINGJ.02CONTACT FINISHJ.02CONTACT FINISHG.02CATARTATINGJ.02CONTACT FINISHG.02CATARTATINGJ.02CATARTATING	TERMINATION STYLE	Gull Wing
PACKAGINGTesk Ref (TR)oTHER NAMESSál-1242-2OTHER NAMES-SSC ~ 79CNUMBER OF POSITIONS0NUMBER OF POSITIONSGMG MOUTING TYPEMOUNTING TYPEI (MIINICATALITESMCHANICAL LIFE-LENGTHI (SGR MOUNELLENGTHI (SGR MOUNELLENGTHI (SGR MOUNELLEAGT RATIONS TATUSI (SGR MOUNELLENGTHI (SGR MOUNELLENGTHI (SGR MOUNELLENGTHI (SGR MOUNELLEIGT RATIONSI (SGR MOUNELLEIGT RATIONSI (SGR MOUNELLEIGT RATIONSI (SGR MOUNELCIARENT RATINGI (SGR MOUNELCIARENT RATINGI (SGR MOUNELCONTACT MATERIALI (SGR MOUNELCONTACT FINISHI (SGR MOUNELCIARTINGI (SGR MOUNELCIART	SERIES	S-4000
ofter NAMESSál248-2 SúlDITOPERATING TEMPERATURE>SC< >7CNUMER OF POSITIONS0MOUNTING TPESuface MontaMOUNTING TPESuface MontaMCSTURE SENSITIVIT LEVEL (MSL)(Inited)MECHANCAL LIFE0LENGTHCale MontaHEIGHT ABOVE BOARD0FLEGT REATUS / ROHSTATUS0HEIGT RADUE1000 (Sale Monta)ELERTICAL LIFE0.000 (Sale Monta)ELERTICAL LIFE0.000 (Sale Monta)ELERTICAL LIFE0.000 (Sale Monta)ELERTICAL LIFE0.000 (Sale Monta)CARRENT RATURG0.000 (Sale Monta)CARRENT RATURG0.000 (Sale Monta)CARRENT RATURG0.000 (Sale Monta)CONTACT FINISH0.000 (Sale Monta)CONTACT FINISH0.000 (Sale Monta)CONTACT FINISH0.000 (Sale Monta)CONTACT FINISH0.000 (Sale Monta)CONTACT FINISH0.0000 (Sale M	PITCH	0.050" (1.27mm), Half
OTTERNARIESSAUTTROPERATING TEMPERATURE-55°C ~ 70°CNUMBER OF POSITIONS0MOUNTING TYPESuface MountMOUNTING TYPE(Iulimited)MCISTURE SENSITIVITY LEVEL (MSL)(Iulimited)MECHANCAL LIFE-LENGTH0.189° (4.80mm)LENGTH0.108° (2.60mm)LENGT ABOVE BOARD0.102° (2.60mm)ELCTRICAL LIFE0.100 SepsELCTRICAL LIFE0.000 SepsELCTRICAL LIFE0.000 SepsCURRENT TATING0.000 ANDCONTACT FINISH0.000 ANDCONTACT FINISH0.0000 ANDCONTACT FINISH0.0000 ANDCONTACT FINISH0.0000 ANDCONTACT FINISH0.00000 ANDCONTACT FINISH0.00000 ANDCONTACT FINISH0.000000 ANDCONTACT FINISH0.00000000000000000000000000000000000	PACKAGING	Tape & Reel (TR)
NUMBER OF POSITIONSINUMBER OF POSITIONSGarde MontaMOUNTING TYPEGarde MontaMOSTURE SENSITIVT LEVEL (MSL)I (Ulinited)MECHANICAL LIFE-LENGTHGarde MontaLENGTHGarde MontaLENGTHJOBY (SAGM)HEGH TABOVE BOARDJOBY (SAGM)ELGT REAL STATUS /JOBY (SAGM)ELGT REAL LIFEJOBY (SAGM)CIRCENT LATINGJOBY (SAGM)CIRCENT RATINGJOBY (SAGM)CINTACT FINISHGard (SAGM)CINTACT FINISHGDY MATERIALBODY MATERIALSponsen Garden (SAGM)AUTORS TYPEMontaAUTORS TYPEStatus (SAGM)	OTHER NAMES	
MOUNTING TYPESuface MonitMOUNTING TYPE(Inlinited)MOISTURE SENSITIVT LEVEL (MSL)(Inlinited)MECHANICAL LIFE-LENGTH(Inlinited)LENGTH(Inlinited)HEGH TABOVE BOARD(Inlinited)FEATRES-ELECTRICAL LIFE(Inlinited)ELECTRICAL LIFE(Inlinited)ELECTRICAL LIFE(Inlinited)CIRCENT RATING(Inlinited)CURRENT RATING(Inlinited)CONTACT FINISH(Inlinited)CONTACT FINISH(Inlinited)CIRCUT(Inlinited)ROMATERIAL(Inlinit	OPERATING TEMPERATURE	-25°C ~ 70°C
MOISTURE SENSITIVITY LEVEL (MSL)i (Imined)MOISTURE SENSITIVITY LEVEL (MSL)i (Imined)MCHANICAL LIFE-LENGTHIB(* AGM)LEAD FREE STATUS / ROLS STATUSIcd free / ROLS MOILHEGHT ABOVE BOARDi (Imined)FATURES-ELCTRICAL LIFEImined)DETAILED DESCRIPTIONImined)CURRENT RATINGImined)CONTACT MATERIALGOMCONTACT FINISHImined)CONTACT FINISHImined)ROLMATERIALImined)	NUMBER OF POSITIONS	10
MECHANICAL LIFE.LENGTH0.189' (A.80m)LEAD FREE STATUS / ROHS STATUSEd fe / ROHS CompliantHEIGHT ABOVE BOARD0.102' (A.60m)FATURES.ELCTRICAL LIFE0.000 StepsCURRENT RATINGDOMACONTACT MATERIALCoper Alloy Step Alloy Step AlloyCONTACT FINISHGDCONTACT FINISHBDCOLTACT MATERIALBDCONTACT FINISHBCCONTACT FINISHMay Step Alloy Step Al	MOUNTING TYPE	Surface Mount
LENGTH1.88° (A.80m)LEAD FREE STATUS ONDS STATUSLead fee / AGNE SompliantHEGHT ABOVE BOARD0.00° (A.00m)FATURES-ELECTRICAL LIFE0.000 StapesCURRENT RATING0.00° AGNE MONTERIAL MONTERIALCONTACT MATERIAL0.00° AGNE MONTERIALCONTACT FINISH6.00° AGNE MONTERIALCRUTUBDP MONTERIALBODY MATERIAL0.00° AGNE MONTERIALCONTACT FINISHBODY MONTERIALCONTACT FINISH0.00° AGNE MONTERIALCONTACT FINISHBODY MONTERIALCONTACT FINISH <td< td=""><td>MOISTURE SENSITIVITY LEVEL (MSL)</td><td>1 (Unlimited)</td></td<>	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
LEAD FREE STATUS / ROHS STATUSLead fee / RoHS CompliantHEIGHT ABOVE BOARD0.102° (2.00m)FEATURES-ELCTRICAL LIFE0.000 StepsDETAILED DESCRIPTION0.000 Step Allon Description Statust of TOO Actuator 100m A.24VDCCURRENT RATING0.000 Allon Description Statust of TOO Actuator 100m A.24VDCCONTACT MATERIALCoper Allon DescriptionCONTACT FINISHGoldCONTACT FINISHBDBODY MATERIALPopenseinfer Statust of Too Actuator 100m A.24VDCROM MATERIALBORISHIER STATUST OF TOO ACTUATORROM MATERIALStatust of Too Actuator 100m A.24VDCROM MATERIALBORISHIER STATUST OF TOO ACTUATORROM MATERIALStatust of Too Actuator 100m A.24VDCROM MATERIALBORISHIER STATUST OF TOO ACTUATORROM MATERIALStatust of Too Actuator 100m A.24VDCROM	MECHANICAL LIFE	-
HEIGHT ABOVE BOARDI.02" (2.60mm)FEATURES-ELCTRICAL LIFE0.000 SepsDETALED DESCRIPTIONDisvich DCD Doistion Surface Mount Rotary for OA Autoato 1.00m ACURRENT RATINGOmoACONTACT FINISHGoldCIRCUITBCDBODY MATERIALPippensensitionADUM MERENALPippensensitionACUATOR TATEBCDADUM MERENALPippensensitionADUM MERENALBippensensitionADUM MERENALBippensensition </td <td>LENGTH</td> <td>0.189" (4.80mm)</td>	LENGTH	0.189" (4.80mm)
FEATURES-ELECTRICAL LIFEJ000 StepsDETAILED DESCRIPTIONDis Wich BCD 10 Position Surface Mount Rotary for TOOI Actuator 100mA 2.4VDCCURRENT RATINGJ00mACONTACT MATERIALCoper AlloyCONTACT FINISHGloCIRCUITBCDBODY MATERIALPolypenselinger SpecificationACTURENT RATINGSpecification SpecificationBODY MATERIALSpecification SpecificationACTURENT RATIONSpecification SpecificationBODY MATERIALSpecification Specification Specificatio	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
EECTRICAL LIFEI,000 StepsDETAILED DESCRIPTIONDip Switch BCD 10 Position Surface Mount Activation 100mA 2.4VDCCURRENT RATINGI00mACONTACT MATERIALGoper AllongCONTACT FINISHGodCIRCUTTBCDBODY MATERIALPippenSulface (PSS)ACTUATOR TYPEBippenSulface (PSS)	HEIGHT ABOVE BOARD	0.102" (2.60mm)
DETAILED DESCRIPTIONDip Switch BCD 10 Position Surface Mount Rotary for Tool Actuator 100mA 2.4VDCCURRENT RATING100mACONTACT MATERIALCoper AlloyCONTACT FINISHGoldCIRCUITBCDBODY MATERIALPolypensolified (PPS)ACTUATOR TYPERotary for Tool Actuator 100mA 2.4VDC	FEATURES	-
CURRENT RATING100mACONTACT MATERIALCoper AlloyCONTACT FINISHGoldCIRCUITBCDBODY MATERIALPolyhenyengengengengengengengengengengengengenge	ELECTRICAL LIFE	10,000 Steps
CONTACT MATERIALCoper AlloyCONTACT FINISHGoldCIRCUITBCDBODY MATERIALPolyhenylene Sulfide (PPS)ACTUATOR TYPERetar for the second	DETAILED DESCRIPTION	Dip Switch BCD 10 Position Surface Mount Rotary for Tool Actuator 100mA 2.4VDC
CONTACT FINISH Gold CIRCUIT BCD BODY MATERIAL Polyphengengengengengengengengengengengengenge	CURRENT RATING	100mA
CIRCUITBCDBODY MATERIALPolyphenylene Sulfide (PPS)ACTUATOR TYPERotary For Tool	CONTACT MATERIAL	Copper Alloy
BODY MATERIAL Polyphenylene Sulfide (PPS) ACTUATOR TYPE Rotary for Tool	CONTACT FINISH	Gold
ACTUATOR TYPE Rotary for Tool	CIRCUIT	BCD
	BODY MATERIAL	Polyphenylene Sulfide (PPS)
ACTUATOR LEVEL Flush, Recessed	ACTUATOR TYPE	Rotary for Tool
	ACTUATOR LEVEL	Flush, Recessed

Related Tags

Copal Electronics S-4010TB	S-4010TB Distributor	S-4010TB Supplier
S-4010TB Price	S-4010TB Pictures	S-4010TB Image
S-4010TB PDF Datasheet	S-4010TB Download Datasheet	S-4010TB Datasheet
S-4010TB Stock	Buy S-4010TB	Buy Copal Electronics S-4010TB
Copal Electronics S-4010TB	Copal Electronics Supplier	Copal Electronics Distributor
Copal Electronics S-4010TB	Copal Electronics Inc. S-4010TB	Nidec Copal Electronics S-4010TB

Related Products

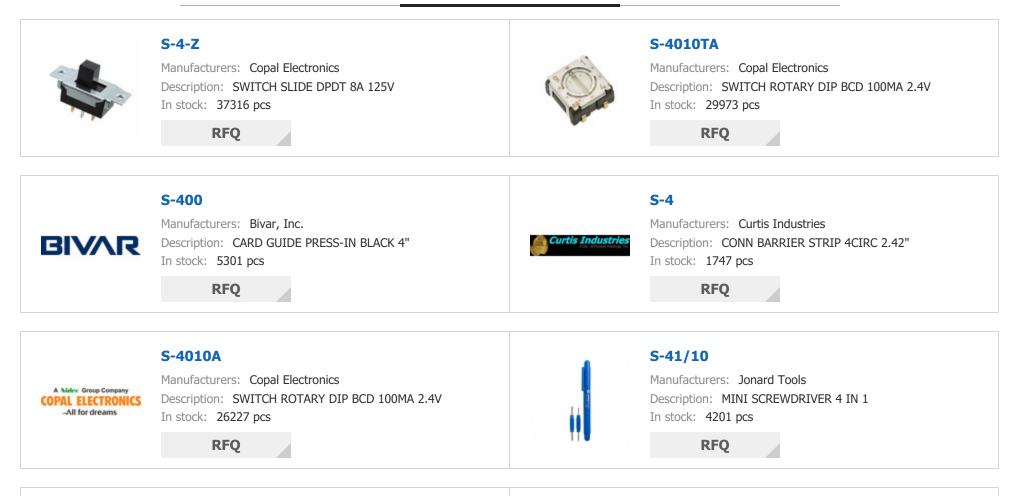



S-403L-20

Manufacturers: 3M Description: ECONOMY HOOD S-403L-20 1=1PC In stock: 3617 pcs

RFQ

S-4010B

A Mider Group Company COPAL ELECTRONICS -All for dreams

Manufacturers: Copal Electronics Description: SWITCH ROTARY DIP BCD 100MA 2.4V In stock: 24479 pcs

RFQ





S-403S-20

Manufacturers: 3M Description: ECONOMYHD S-403S-20SMALL/M 1=1PC In stock: 3638 pcs

RFQ

S-450-CI

Manufacturers: Bivar, Inc. BIVAR Description: CARD GUIDE ANTISTAT 4.5X.078 BLK In stock: 4552 pcs

RFQ

Copyright © 2020 Reliable Distributor of Electronic Components

E-mail: Info@infinity-electronic.com

Address: 17F, Gaylord Commercial Building, 114-118 Lockhart Road, Wan Chai, Hong Kong

