#### 0033.3812 Details PDF

# **infinity-electronic**

S.SCHURTER Schurter ELECTRONIC COM





Part Number:
Manufacturer/Brand:
Product description
Datasheets:
RoHs Status
Stock Condition
Ship From
Shipment Way

0033.3812 Schurter SWITCH SELECT 6POS SERIES 10A 0033.3812.pdf 💒 Lead free / RoHS Compliant 3678 pcs stock Hong Kong DHL/Fedex/TNT/UPS/EMS

### **REQUEST FOR QUOTATION**


Image may be representation. See specifications for product details.


PART NUMBER0333 3812MANUFACTURERSchurterDESCRIPTIONSMITCH SELECT 4FOS SERIES 10ALEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantQUANTTY AVAILABLEColonas 303320.00/QUANTTY AVAILABLEColonas 30320.00/DATA SHEETColonas 30320.00/VOLTAGE RATING - AC250VTYPELine Voltage SelectorTRIMINATION STYLEPC PinSWITCH FUNCTIONOn-On-On-On-OnSERIESSWZPAREL CUTOUT DIPENSIONS-OPERATING TEMPERATUREAPOC ~ 85°CNUMBER OF POSITIONS6MOUTTING TYPEThrough HoleILLUMINATION VOLTAGE (NOMINAL)-LILUMINATION VOLTAGE (NOMINAL)-		Specifications of 0033.3812
MANUFACTURERSchurterDESCRIPTIONSWTCH SELECT GPOS SERIES 10ALEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantQUANTITY AVAILABLE3678 pcsDATA SHEET🐨 0033.3812.pdfVOLTAGE RATING - AC250VTYPELine Voltage SelectorTRMINATION STYLEPC PinSWITCH FUNCTIONOn-On-On-On-On-OnSERIESSWZPAREL CUTOL DIMENSIONS-OPERATING FUPERATURE40°C ~ 85°CNURBER OF POSITIONS6MOUNTING TYPEThrough HoleMECHANICAL LIFE300 CyclesLILUMINATION NOLTAGE (NOMINAL)-LILUMINATION TYPE, COLOR-ILUMINATION TYPE, COLOR-MECHANICAL LIFE300 CyclesLILUMINATION TYPE, COLOR-LILUMINATION TYPE, COLOR-DEFATLED DESCRIPTIONSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleDEPTH BEHIND FLANGE-CURRENT RATINGIDA (AC)CURRENT RATINGSeries, Parallel Connections 10A (AC) 250V Through HoleDEFTH BEHIND FLANGE-CURRENT RATING <td></td> <td></td>		
DeSCRIPTIONSWITCH SELECT PROS SERIES 10ALEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantQUANTITY AVALLABLE3678 pcsDATA SHEET© 0033.3812.pdfVOLTAGE RATING - AC250VTYPELine Voltage SelectorTERMINATION STYLEPC PinSWITCH FUNCTIONOn-On-On-On-OnSERIESSWZPANEL CUTOUT DIMENSIONS-OPERATING TPRE40°C ~ 85°CNUMBER OF POSITIONS6MOUTING TYPE100 CyclesLEAD FREE STATUS / ROMS STATUSLead free / RoHS CompliantILLUMINATION VOLTAGE (MOMINAL)-LILUMINATION VOLTAGE (MOMINAL)-LILUMINATION VOLTAGE (MOMINAL)-LILUMINATION VOLTAGE (MOMINAL)-ELECTRICOL LIFE-DETAILED DESCRIPTIONSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleDEPTH BEHIND FLANCE-CURRENT RATING10A (AC)CURRENT RATINGSelector Switch 6 Position Series, Parallel ConnectionsCURRENT RATINGSelector Switch 6 Position Series, Parallel ConnectionsCURUTSelector Switch 6 Position Series, Parallel ConnectionsCURUTSelector Switch 6 Position Series, Parallel Connections	PART NUMBER	0033.3812
LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantQUANTITY AVAILABLE3678 pcsDATA SHEET© 0033.3812.pdfVOLTAGE RATING - AC250VTYPELine Voltage SelectorTREMINATION STYLEPC PinSWITCH FUNCTIONOn-On-On-On-OnSERIESSWZPAREL CUTOUT DIMENSIONS-OPERATING TEMPERATURE-0PC ~ 85°CNUMBER OF POSITIONS6MOUNTING TYPEThrough HoleMECHANICAL LIFE300 CyclesLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantLULIMINATION VOLTAGE (NOMINAL)-LULIMINATION TYPE, COLOR-LULIMINATION TYPE, COLOR-LULIMINATION VOLTAGE (NOMINAL)-ELELIMINATION VOLTAGE (NOMINAL)-ELECTRICAL LIFE-DEFAILED DESCRIPTIONSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleDEFTI BEHIND FLANGE-CURRENT RATINGIDA (AC)CIRCUTSeries, Parallel Connections	MANUFACTURER	Schurter
QUANTITY AVAILABLE3678 pcsDATA SHEET© 0033.3812.pdfVOLTAGE RATING - AC50VTYPELine Voltage SelectorTRMINATION STYLEPC PinSWITCH FUNCTIONOn-On-On-On-OnSRIESSWZPANEL CUTOUT DIMENSIONS-OPERATING TEMPERATURE-40°C ~ 85°CNUMBER OF POSITIONS6MOUNTING TYPEThrough HoleLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATION TYPE, COLOR	DESCRIPTION	SWITCH SELECT 6POS SERIES 10A
DATA SHEET© 003.3812.pdfVOLTAGE RATING - AC250VTYPELine Voltage SelectorTERMINATION STYLEPC PinSWITCH FUNCTIONOn-On-On-On-On-OnSERIESSWZPANEL CUTOUT DIMENSIONS-OPERATING TEMPERATURE-40°C ~ 85°CNUMBER OF POSITIONS6MOUNTING TYPEThrough HoleMECHANICAL LIFE300 CyclesLILMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATION TYPE, COLOR-ILLUMINATION TYPE, COLORNon-IlluminatedILLUMINATION TYPE, COLOR-ILLUMINATION TYPE, COLOR-IELECTRICAL LIFE-FEATURESMaring: 100-240-220-120IELECTRICAL LIFE-DETAILED DESCRIPTIONSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleDEFTH BEHIND FLANGE-CURRENT RATING10A (AC)CURRENT RATINGSeles, Parallel ConnectionsGICUITSeries, Parallel ConnectionsCURRENT RATINGSeries, Parallel ConnectionsGICUITSeries, Parallel Connections </td <td>LEAD FREE STATUS / ROHS STATUS</td> <td>Lead free / RoHS Compliant</td>	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
VOLTAGE RATING - ACZSOVYPPELine Voltage SelectorTERMINATION STYLERC PinSWITCH FUNCTIONOn-On-On-On-On-OnSERIESSWZPANEL CUTOUT DIMENSTONS-OPERATING TEMPERATURE-40°C ~ 85°CNUMBER OF POSITIONS6MOUNTING TYPEThrough HoleMCHANICAL LIFE300 CyclesLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATION TYPE, COLORNon-IlluminatedFATURESMarking: 100-240-220-120ELECTRICAL LIFE-DETAILED DESCRIPTIONSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleDETAILED DESCRIPTION-ILCUTI10A (AC)CURRENT RATINGSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleCIRCUTSeries, Parallel Connections	QUANTITY AVAILABLE	3678 pcs
TYPELine Voltage SelectorTERMINATION STYLEPC PinSWITCH FUNCTIONOn-On-On-On-On-OnSERIESSWZPANEL CUTOUT DIMENSIONS-OPERATING TEMPERATURE-40°C ~ 85°CNUMBER OF POSITIONS6MOUNTING TYPEThrough HoleMECHANICAL LIFE300 CyclesLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-LLUMINATION TYPE, COLORNon-IlluminatedFATURESMarking: 100-240-220-120ELECTRICAL LIFE-DETAILED DESCRIPTIONSelector Switch 6 Position Series, Parallel Connections 10A (AC) 2500 Through HoleDETAILED DESCRIPTION10A (AC)CURRENT RATING10A (AC)CURRENT RATINGSeries, Parallel ConnectionsGRCUITSeries, Parallel Connections	DATA SHEET	0033.3812.pdf
TERMINATION STYLEPC PinSWITCH FUNCTIONOn-On-On-On-On-OnSERIESSWZPANEL CUTOUT DIMENSIONS-OPERATING TEMPERATURE40°C ~ 85°CNUMBER OF POSITIONS6MOUNTING TYPEThrough HoleMECHANICAL LIFE300 CyclesLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILUMINATION VOLTAGE (NOMINAL)-ILUMINATION TYPE, COLOR-ILUMINATION TYPE, COLOR-ILUMINATION-ILUMINATION-ILUMINATIONSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleDETAILED DESCRIPTION-CURRENT RATING-CURRENT RATING-CURRENT RATING-CURRENT RATING-CURRENT RATING-CURRENT RATING-CURCUT-CURRENT RATING-CURRENT RATING-CURCUT-Select Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleDEFTH BEHIND FLANGE-CURRENT RATINGSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleDEFTH BEHIND FLANGE-CURRENT RATINGSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleCURRENT RATINGSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleCURRENT RATINGSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through Hole	VOLTAGE RATING - AC	250V
SWITCH FUNCTIONOn-On-On-On-OnSERIESSWZPANEL CUTOUT DIMENSIONS-OPERATING TEMPERATURE-40°C ~ 85°CNUMBER OF POSITIONS6MOUNTING TYPEThrough HoleMECHANICAL LIFE300 CyclesLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILUMINATION VOLTAGE (NOMINAL)-ILUMINATION VOLTAGE (NOMINAL)-ILUMINATION VOLTAGE (NOMINAL)-ILUMINATION TYPE, COLOR-ILUMINATIONNon-IlluminatedELECTRICAL LIFE-DETAILED DESCRIPTIONSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleDETH BEHIND FLANGE-CURRENT RATING10A (AC)ILRUNTSeries, Parallel Connections	ТҮРЕ	Line Voltage Selector
SERIESSWZPANEL CUTOUT DIMENSIONS-PAREL CUTOUT DIMENSIONS-OPERATING TEMPERATURE-NUMBER OF POSITIONS6MOUNTING TYPEThrough HoleMECHANICAL LIFE300 CyclesLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILLUMINATION VOLTAGE (NOMINAL)-LLUMINATION VOLTAGE (NOMINAL)-FLUUMINATIONNon-IlluminatedILLUMINATIONMarking: 100-240-220-120ELECTRICAL LIFE-DEFATILED DESCRIPTIONSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleDEFTH BEHIND FLANGE-CURRENT RATING10A (AC)CURRENT RATINGSeries, Parallel Connections	TERMINATION STYLE	PC Pin
PANEL CUTOUT DIMENSIONS-OPERATING TEMPERATURE-40°C ~ 85°CNUMBER OF POSITIONS6MOUNTING TYPEThrough HoleMECHANICAL LIFE300 CyclesLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION1440ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATIONNon-IlluminatedFEATURESMarking: 100-240-220-120ELECTRICAL LIFE-DETAILED DESCRIPTIONSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleDEPTH BEHIND FLANGE-CURRENT RATING10A (AC)CIRCUITSeries, Parallel Connections	SWITCH FUNCTION	On-On-On-On
OPERATING TEMPERATURE-40°C ~ 85°CNUMBER OF POSITIONS6MOUNTING TYPEThrough HoleMECHANICAL LIFE300 CyclesLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION1940ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATIONMonitiniatedFEATURESMarking: 100-240-220-120LECTRICAL LIFE-DETAILED DESCRIPTIONSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleCURRENT RATING10A (AC)CIRCUITSeries, Parallel Connections	SERIES	SWZ
NUMBER OF POSITIONS6MOUNTING TYPEThrough HoleMECHANICAL LIFE300 CyclesLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTIONIP40ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATIONMon-IlluminatedFEATURESMarking: 100-240-220-120ELECTRICAL LIFE-DETAILED DESCRIPTIONSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleDEPTH BEHIND FLANGE-CURRENT RATING10A (AC)CURRENT RATINGSeries, Parallel Connections	PANEL CUTOUT DIMENSIONS	-
MOUNTING TYPEThough HoleMCCHANICAL LIFE300 CyclesLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINGRESS PROTECTION140ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATIONNor-IlluminatedIECTRICAL LIFE-DETAILED DESCRIPTIONSelector Switch & Position Series, Parallel Connections 10A (AC) 250V Through HoleDEPTH BEHIND FLANGE-CURRENT RATINGIOA (AC)GURICITSelector SectionsCURRENT RATINGSelector SectionsCURRENT RATINGSection Section	OPERATING TEMPERATURE	-40°C ~ 85°C
MECHANICAL LIFE     300 Cycles       LEAD FREE STATUS / ROHS STATUS     Lead free / RoHS Compliant       INGRESS PROTECTION     IP40       ILLUMINATION VOLTAGE (NOMINAL)     -       ILLUMINATION TYPE, COLOR     -       ILLUMINATION TYPE, COLOR     Non-Illuminated       FEATURES     Marking: 100-240-220-120       ELECTRICAL LIFE     -       DETAILED DESCRIPTION     Selector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through Hole       DEPTH BEHIND F LANGE     -       CURRENT RATING     10A (AC)       CIRCUT     Series, Parallel Connections	NUMBER OF POSITIONS	6
LEAD FREE STATUS / ROHS STATUS   Lead free / RoHS Compliant     INGRESS PROTECTION   IP40     ILLUMINATION VOLTAGE (NOMINAL)   -     ILLUMINATION TYPE, COLOR   -     ILLUMINATION   Non-Illuminated     FEATURES   Marking: 100-240-220-120     ELECTRICAL LIFE   -     DETAILED DESCRIPTION   Selector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through Hole     DEPTH BEHIND FLANGE   -     CURRENT RATING   10A (AC)     CIRCUIT   Series, Parallel Connections	MOUNTING TYPE	Through Hole
INGRESS PROTECTIONIP40ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATION TYPE, COLORNon-IlluminatedILLUMINATIONNon-IlluminatedFEATURESMarking: 100-240-220-120ELECTRICAL LIFE-DETAILED DESCRIPTIONSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleDEPTH BEHIND FLANGE-CURRENT RATING10A (AC)CIRCUITSeries, Parallel Connections	MECHANICAL LIFE	300 Cycles
ILLUMINATION VOLTAGE (NOMINAL)   -     ILLUMINATION TYPE, COLOR   -     ILLUMINATION TYPE, COLOR   Non-Iluminated     ILLUMINATION   Non-Iluminated     FEATURES   Marking: 100-240-220-120     ELECTRICAL LIFE   -     DETAILED DESCRIPTION   Selector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through Hole     DEPTH BEHIND FLANGE   -     CURRENT RATING   10A (AC)     CIRCUIT   Series, Parallel Connections	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ILLUMINATION TYPE, COLOR-ILLUMINATIONNon-IluminatedILLUMINATIONNon-IluminatedFEATURESMarking: 100-240-220-120ELECTRICAL LIFE-DETAILED DESCRIPTIONSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleDEPTH BEHIND FLANGE-CURRENT RATING10A (AC)CIRCUITSeries, Parallel Connections	INGRESS PROTECTION	IP40
ILLUMINATION   Non-Illuminated     FEATURES   Marking: 100-240-220-120     ELECTRICAL LIFE   -     DETAILED DESCRIPTION   Selector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through Hole     DEPTH BEHIND FLANGE   -     CURRENT RATING   10A (AC)     CIRCUIT   Series, Parallel Connections	ILLUMINATION VOLTAGE (NOMINAL)	-
FEATURESMarking: 100-240-220-120ELECTRICAL LIFE-DETAILED DESCRIPTIONSelector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through HoleDEPTH BEHIND FLANGE-CURRENT RATING10A (AC)CIRCUITSeries, Parallel Connections	ILLUMINATION TYPE, COLOR	-
ELECTRICAL LIFE   -     DETAILED DESCRIPTION   Selector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through Hole     DEPTH BEHIND FLANGE   -     CURRENT RATING   10A (AC)     CIRCUIT   Series, Parallel Connections	ILLUMINATION	Non-Illuminated
DETAILED DESCRIPTION   Selector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through Hole     DEPTH BEHIND FLANGE   -     CURRENT RATING   10A (AC)     CIRCUIT   Series, Parallel Connections	FEATURES	Marking: 100-240-220-120
DEPTH BEHIND FLANGE-CURRENT RATING10A (AC)CIRCUITSeries, Parallel Connections	ELECTRICAL LIFE	-
CURRENT RATING 10A (AC)   CIRCUIT Series, Parallel Connections	DETAILED DESCRIPTION	Selector Switch 6 Position Series, Parallel Connections 10A (AC) 250V Through Hole
CIRCUIT Series, Parallel Connections	DEPTH BEHIND FLANGE	-
·	CURRENT RATING	10A (AC)
APPROVALS CSA, UR, VDE	CIRCUIT	Series, Parallel Connections
	APPROVALS	CSA, UR, VDE

# **Related Tags**

Schurter 0033.3812	0033.3812 Distributor	0033.3812 Supplier
0033.3812 Price	0033.3812 Pictures	0033.3812 Image
0033.3812 PDF Datasheet	0033.3812 Download Datasheet	0033.3812 Datasheet
0033.3812 Stock	Buy 0033.3812	Buy Schurter 0033.3812
Schurter 0033.3812	Schurter Supplier	Schurter Distributor
Schurter 0033.3812	Schurter Inc. 0033.3812	

## **Related Products**

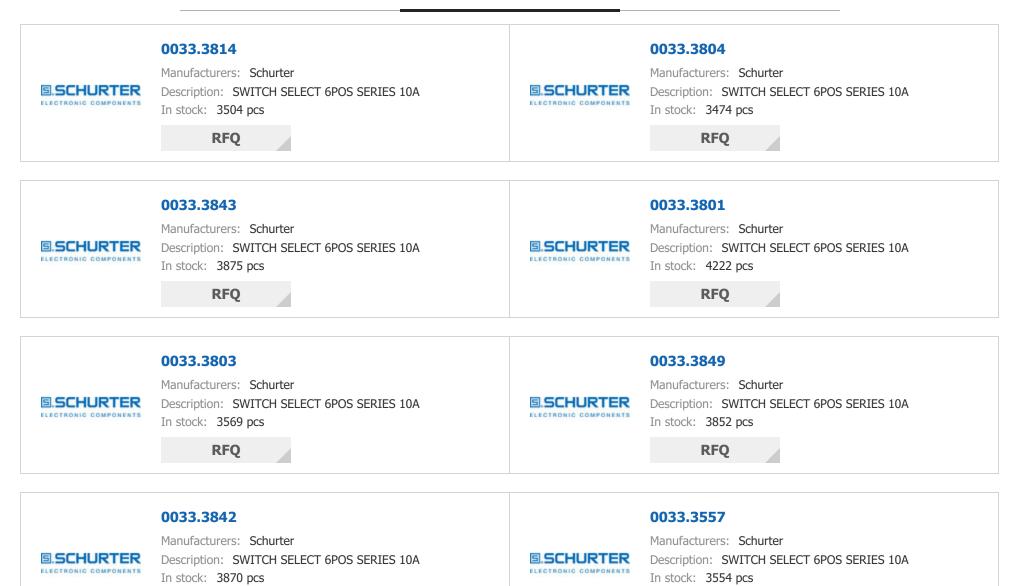

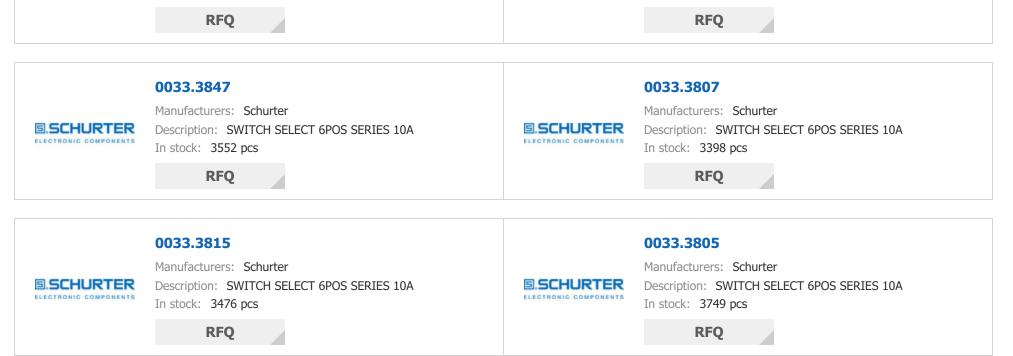

#### **Copyright © 2020 Reliable Distributor of Electronic Components**

E-mail: Info@infinity-electronic.com

Address: 17F, Gaylord Commercial Building, 114-118 Lockhart Road, Wan Chai, Hong Kong

