infinity-electronic

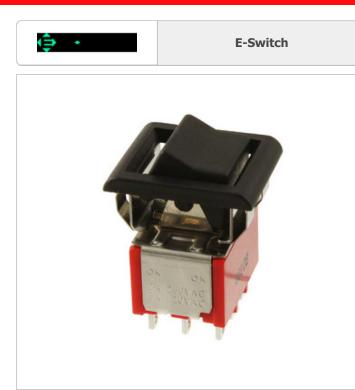


Image may be representation. See specifications for product details.

3003P1R6BLKM1QEBLK

Part Number:	3003P1R6BLKM1QEBLK
Manufacturer/Brand:	E-Switch
Product description	SWITCH ROCKER 3PDT 5A 120V
Datasheets:	003P1R6BLKM1QEBLK.pdf
RoHs Status	💒 Lead free / RoHS Compliant
Stock Condition	19729 pcs stock
Ship From	Hong Kong
Shipment Way	DHL/Fedex/TNT/UPS/EMS

REQUEST FOR QUOTATION


Specifications of 3003P1R6BLKM1QEBLK

Non-Index Solitation (Section (Sect	PART NUMBER	3003P1R6BLKM1QEBLK
DESCRIPTIONSMITCH ROCKER 3PDT SA 120VLEAD FREE STATUS / ROHS STATUSLed fre/ / ROHS CompliantQUANITTY AVALABLE1972 PSDATA SHEET2003 PLABLKM1QEBLK.pdfVOLTAGE RATING - DC28VVOLTAGE RATING - AC0%0STRIED0%0STRIED0%0STRIED0%0SRIED0%0SRIED0%0PAREL CUTOUT DIMENSIONS0%0OPC - SSGC0%0MOUTTUR STRIED0%0MOUTTUR STRIED0%0MOUTTUR STRIED0%0MOUTTUR STRIED0%0MOUTTUR STRIED0%0MOUTTUR STRIED0%0MOUTTUR STRIED1(Inlimited)MOUTTUR STRIED1(Inlimited)MOUTTUR STRIED1MOUTTUR STRIED1 <td></td> <td></td>		
LEAD FREE STATUS / ROHS STATUS Lead free / ROHS Compliant QUANTITY AVALABLE 929 ps DATA SHEET S0091R6BLKMQEBLK.pdf VOLTAGE RATING - DC 28V VOLTAGE RATING - AC 900 TERMINATION STYLE Solder Lig SWITCH FUNCTION On-On SREES 00 PARLE CUTOUT DIMENSIONS Retangular - 15.24mm x 12.70mm PARLE CUTOUT DIMENSIONS Balk OPERATING - PC S90°C MOUNTING TYPE ORe Mount, Snap-In MOUNTING TYPE I (Unlimited) MECHANICAL LIFE - LEAD FREE STATUS / ROMENTATUS I (Unlimited) ILUMINATION VOLTAGE (NOMINAL) - ILUMINATION VOLTAGE (NOMINAL) - ILUMINATION VOLTAGE (NOMINAL) - ELECTEICAL LIFE MOOS Cycles ELECTERICAL LIFE QUO Cycles ICUTATION VOLTAGE (NOMINAL) - CURRENT RATING CACPCO CURRENT RATING GORE SWITCH FUNCTION CURRENT RATING GORE SWITCH FUNCTION CURRENT RATING		
Quantity Available1929 psDATA SHEET© 30091R6BLKN4QEBLK.pd/Voltrade HATING - DC24Vvoltrade HATING - AC10VStritter Anton StyleSoder LugSWITCH FUNCTIONOn-OnSREIES30PAREL CUTOUT DIMENSIONSRetangular - 15.24mm x 12.70mmPAREL GUTOUT DIMENSIONSSoler Association of the Soler Association		
DATA SHEET DOOPTROBLIKMIQEBLK.pdf VOLTAGE RATING - DC 28V VOLTAGE RATING - AC 120V TERMINATION STYLE Solder Lug SWITCH FUNCTION 0n-On SERIES 300 PAREL CUTOUT DIMENSIONS Rectangular - 15.24mm x 12.70mm PAREL CUTOUT DIMENSIONS Bulk OPERATING TEMPERATURE -30°C ~ 85°C MOUNTING TYPE Panel Mount, Snap-In MOUNTING TYPE I (Unlimited) MOUNTING TYPE -6 ILLEAD FREE STATUS / ROHS STATUS Led free / RoHS Compliant ILLUMINATION TYPE, COLOR - ILLUMINATION TYPE, COLOR - FEATURES FEAGURES STROTECTION ILLUMINATION TYPE, COLOR - FEATURES FEAGURES COLOR ELECTRICAL LIFE MOUO Cycles ELECTRICAL LIFE SIGA(CYC)C) 120V Panel Mount, Snap-In CURENT RATING		
A VOLTAGE RATING - DCBNVOLTAGE RATING - AC28VVOLTAGE RATING - ACSolder LugSWITCH FUNCTIONOn-OnSWITCH FUNCTIONOn-OnSERIES300ANEL CUTOUT DIMENSIONSRectangular - 15.24mm x 12.70mmPACKAGINGBukOPERATING TEMPERATURE- 30°C 85°CMOUTING TYPEPanel Mount, Snap-InMOUTING TYPEI (Inlimited)MECHANICAL LIFE- 6LEAD FREE STATUS / ROHS STATUSI (Inlimited)ILUMINATION TYPE, COLOR- 6ILUMINATION TYPE, COLOR- 6FETURESFEOT COLORILUMINATION TYPE, COLOR- 6ILUMINATION TYPE, COLOR- 6FETURESFEOT COLORILUMINATION TYPE, COLOR- 6ILUMINATION TYPE, COLOR- 6ILUMINATION- 6 </td <td></td> <td></td>		
Voltage Rating - Ac20Vtremination styleSoder Lugswitch Functionon-Onseries300seriesRetangular - 15.24mm x 12.70mmpackagingBukoperating temperature-0°C & S°Cmounting type-0°C A S°C <td></td> <td></td>		
TERMINATION STYLESolde LugSWITCH FUNCTIONNo-NoSERLES00PARLE CUTOUT DIMENSIONSRectanguer 15.24mm x12.70mmPACKAGINGBukOPERATING TEMPERATURE-0°C ~ 85°CMOUNTING TYPEPanel Mourt, Snap-InMOUNTING TYPE(Inlimited)MECHANICAL LIFE-0LEAD FREE STATUS / ROHS STATUSCad free / ROHS CompliantILUMINATION VOLTAGE (NOMINAL)-0ILUMINATION VOLTAGE (NOMINAL)-0ILUMINATION TYPE, COLOR-0ILUMINATION TYPE, COLOR000 CyclesILUMINATION TYPE, COLORSinge Sand Sand Sand Sand Sand Sand Sand Sand		
SWITCH FUNCTIONOn-OnSERIES00PAREL CUTOUT DIMENSIONSRectanguer - 15.24mm x 12.70mmPACKAGINGBulkOPERATING TEMPERATURE-0°C ~ 65°CMOUTTING TYPEPanel Mount, Snap-InMOISTURE SENSITIVITY LEVEL (MSL)(10/Imited)MECHANICAL LIFE-ILAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILULININATION VOLTAGE (NOMINAL)-ILULININATION VOLTAGE (NOMINAL)-ELECTRICAL LIFEEyos Bed TerminalsILULININATION TYPE, COLORACIOC YCIACUMULES (SAUCH SCHOLL)ILULININATION TYPE, COLORACIOC YCIACUMULES (SAUCH SCHOLL)ILULININATION TYPE, COLORACIOC YCIACUMULES (SAUCH SCHOLL)ILULININATION TYPE, COLORACIACUMULES (SAUCH SCHOLL)ILULININATION TYPE, COLORBACILULININATION TYPE, COLORBIORILULININATION TYPE, COLORBIORILULININATION TYPE, COLORBIORILULININATION TYPE, COLORBIORILULININATION TYPE, COLORBIORILULININATION TYPE, COLORBIORILULININATION TYPE, CO		
Series300PARE CUTOUT DIMENSIONSRetanguar - 15.24mm x 12.70mmPACKAGINGBulkOPERATING TEMPERATURE-0°C ~ 85°CMOUNTING TYPEPanel Mount, Snap-InMOISTURE SENSITIVITY LEVEL (MSL)(1/limiteq)MECHANICAL LIFE-ILAD FREE STATUS / ROHS STATUSCad free / ROHS CompliantILUMINATION VOLTAGE (NOMINAL)-ILUMINATION VOLTAGE (NOMINAL)-ELECTRICAL LIFEGood CyclesILUMINATION TYPE, COLOR-ELECTRICAL LIFEGood CyclesILUMINATION TYPE, COLOR-ELECTRICAL LIFEGood CyclesILUMINATION TYPE, COLOR-CURRENT FATINGGAC/CYCLIDEV PANEl MOUNT, Snap-InCURRENT RATINGGAC/CYCLIDEV PANEl MOUNT, Snap-InCURRENT RATINGGAC/CYCLIDEV PANEl MOUNT, Snap-InCURRENT RATINGBackCURRENT RATINGFACLACIDATIONCURRENT RATINGFOTCURRENT RATING		
PANEL CUTOUT DIMENSIONSRectangular - 15.24mm x 12.70mmPACKAGINGBulkPACKAGING- 30°C ~ 85°CMOUNTING TEMPERATURE- 9nel Mount, Snap-InMOUNTING TYPEI (Unlimited)MOTSTURE SENSITIVITY LEVEL (MSL)I (Unlimited)MECHANICAL LIFE- 6LEAD FREE STATUS / ROHS STATUSEdd free / ROHS CompliantILUUMINATION VOLTAGE (NOMINAL)- 6ILUUMINATION VOLTAGE (NOMINAL)- 6ILUUMINATION VOLTAGE (NOMINAL)- 6ECETRICAL LIFEBoyo Sealed TerminalsELECTRICAL LIFE- 6000 CyclesDETAILED DESCRIPTION- 6A(AC/DC) 120V Panel Mount, Snap-InCURRENT RATING- 6A(AC/DC) 120V Panel Mount, Snap-In </td <td></td> <td></td>		
PACKAGINGBukOPERATING TEMPERATURESOC 85°CMOUNTING TYPEPanel Mount, Snap-InMOISTURE SENSITIVT LEVEL (MSL)I (Unimited)MECHANICAL LIFEI (Unimited)ILEAD FREE STATUS / ROHS STATUSIcad free / ROHS CompliantILUMIINATION VOLTAGE (NOMINAL)-ILUMINATION VPFE, COLOR-IECTRICAL LIFEMoo Cyclead TerminalsILUMINATION TYPE, COLOR-ILEAT RESMoo Cyclead TerminalsILUMINATION TYPE, COLOR-ILUMINATION TYPE, COLOR-ICTRICAL LIFEMoo Cyclead TerminalsILUMINATION TYPE, COLOR-ICURRENT RATING-COLOR - ACTUATOR/CAPBickCUCRENT RATING-CUCRENT RATING-COLOR - ACTUATOR/CAPBickCIRCUIT-AND-AND-CIRCUIT-CIRCUIT-CIRCUIT-CIRCUIT-CIRCUIT RATING-CIRCUIT RATING-CIRCUIT-CIRCUIT-CIRCUIT-CIRCUIT-CIRCUIT-CIRCUIT-CIRCUIT-CIRCUIT-CIRCUIT-CIRCUIT-CIRCUIT-CIRCUIT-CIRCUIT-CIRCUIT-CIRCUIT-CIRCUIT-CIRCUIT-CIRCUIT- <tr< td=""><td></td><td></td></tr<>		
OPERATING TEMPERATURE-0°C ~ 85°CMOUNTING TYPEPanel Mount, Snap-InMOISTURE SENSITIVT LEVEL (MSL)(Ulmined)MCHANICAL LIFE-LEAD FREE STATUS / ROHS STATUSEdd free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLORFOX Seled TerminalsELECTRICAL LIFE4,000 CyclesDETATLED DESCRIPTIONACKODEL SACKODEL JACKODEL JACKODE		
MOUNTING TYPEPanel Mount, Snap-InMOUNTING TYPE1 (UnlimedyMOSTURE SENSITIVITY LEVEL (MSL)1 (UnlimedyMECHANICAL LIFE-LEAD FREE STATUS / ROHS STATUSEdd free / ROHS CompliantINGRESS PROTECTION-ILUMINATION VOLTAGE (NOMINAL)-ILUMINATION TYPE, COLORFOX Seld TerminalsELECTRICAL LIFEMOUO CyclesDETAILED DESCRIPTIONRoker Switch 3PDT SA (AC/DC) 120V Panel Mount, Snap-InCURRENT RATINGBickCURRENT RATINGBickCURRENT RATINGBickCURRENT RATINGBickCURRENT RATINGBickCHARLAT LYPECocker Cancer ObjectCURRENT RATINGDETAILED DESCRIPTIONCURRENT RATINGBickCURRENT RATINGBickCURRENT RATINGDETAILED DESCRIPTIONCURRENT RATINGDETAILED DESCRIPTIONCURRENT RATINGBickCURRENT RATINGDETAILED DESCRIPTIONCURRENT RATINGDESCRIPTIONCURRENT R		
MOISTURE SENSITIVITY LEVEL (MSL)i (Unimited)MCHANICAL LIFE-LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantLINGRESS PROTECTION-ILUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESFoxy Sealed TerminalsELECTRICAL LIFEA(000 Cycles)DETAILED DESCRIPTIONSoker Switch 3PDT 5A (AC/DC) 120V Panel Mount, Snap-InCURRENT RATINGBlackCURRENT RATINGBJDTCURRENT RATINGSPDTCURCUTSPDTACUATOR TYPESPDT		
MECHANICAL LIFE-LEAD FREE STATUS / ROHS STATUSEad free / RoHS CompliantLIGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESBoy Sealed TerminalsELECTRICAL LIFE4,000 CyclesDETAILED DESCRIPTIONRoker Switch 3PDT 5A (A/CDC) 120V Panel Mount, Snap-InCURRENT RATINGBackCIGLOR - ACTUATOR/CAPBackCIRCUTTSpTACTUATOR TYPEConse (Standard)		
LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESFoxy Sealed TerminalsELECTRICAL LIFE4,000 CyclesDETAILED DESCRIPTIONRocker Switch 3PDT 5A (AC/DC) 120V Panel Mount, Snap-InCURRENT RATINGBiakCICOLGR - ACTUATOR/CAPBiakCIRCUTTSpTACTUATOR TYPEConserved Suitement		
INGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESExposed TerminalsELECTRICAL LIFE4000 CyclesDETAILED DESCRIPTIONRoker Switch 3PDT 5A (AC/DC) 120V Panel Mount, Snap-InCURRENT RATING5A (AC/DC)COLOR - ACTUATOR/CAPBiakCIRCUIT3PDTACTUATOR TYPEConsey (Standard V)		Lead free / RoHS Compliant
ILLUMINATION VOLTAGE (NOMINAL) - ILLUMINATION TYPE, COLOR - FEATURES Fpoy Sealed Terminals ELECTRICAL LIFE 0,000 Cycles DETAILED DESCRIPTION Rocker Switch 3PDT 5A (AC/DC) 120V Panel Mount, Snap-In CURRENT RATING 5A (AC/DC) COLOR - ACTUATOR/CAP Black CIRCUIT 3PDT ACTUATOR TYPE Consequency (Standard)		
ILLUMINATION TYPE, COLOR-FEATURESEpox Sealed TerminalsELECTRICAL LIFE40,000 CyclesDETAILED DESCRIPTIONRocker Switch 3PDT 5A (AC/DC) 120V Panel Mount, Snap-InCURRENT RATINGA (AC/DC)COLOR - ACTUATOR/CAPBlackCIRCUIT3PDTACTUATOR TYPEConce (Standard U)		-
FEATURESEpoxy Sealed TerminalsELECTRICAL LIFE4,000 CyclesDETAILED DESCRIPTIONRocker Switch 3PDT 5A (AC/DC) 120V Panel Mount, Snap-InCURRENT RATING6, (A/DC)COLOR - ACTUATOR/CAPBlackCIRCUTT3PDTACTUATOR TYPEConce (Standard US)		
ELECTRICAL LIFE40,000 CyclesDETAILED DESCRIPTIONRocker Switch 3PDT 5A (AC/DC) 120V Panel Mount, Snap-InCURRENT RATING5A (AC/DC)COLOR - ACTUATOR/CAPBlackCIRCUIT3PDTACTUATOR TYPEConcey (Standard V)		Enoxy Sealed Terminals
DETAILED DESCRIPTIONRocker Switch 3PDT 5A (AC/DC) 120V Panel Mount, Snap-InCURRENT RATING5A (AC/DC)COLOR - ACTUATOR/CAPBlackCIRCUIT3PDTACTUATOR TYPEConcave (Standard V)		
CURRENT RATING5A (AC/DC)COLOR - ACTUATOR/CAPBlackCIRCUIT3PDTACTUATOR TYPEConcave (Standard V)		
COLOR - ACTUATOR/CAP Black CIRCUIT 3PDT ACTUATOR TYPE Concave (Standard V)		
CIRCUIT 3PDT ACTUATOR TYPE Concave (Standard V)		
ACTUATOR TYPE Concave (Standard V)		


Related Tags

E-Switch 3003P1R6BLKM1QEBLK	3003P1R6BLKM1QEBLK Distributor	3003P1R6BLKM1QEBLK Supplier
3003P1R6BLKM1QEBLK Price	3003P1R6BLKM1QEBLK Pictures	3003P1R6BLKM1QEBLK Image
3003P1R6BLKM1QEBLK PDF Datasheet	3003P1R6BLKM1QEBLK Download Datasheet	3003P1R6BLKM1QEBLK Datasheet
3003P1R6BLKM1QEBLK Stock	Buy 3003P1R6BLKM1QEBLK	Buy E-Switch 3003P1R6BLKM1QEBLK
E-Switch 3003P1R6BLKM1QEBLK	E-Switch Supplier	E-Switch Distributor
E-Switch 3003P1R6BLKM1QEBLK		

Related Products

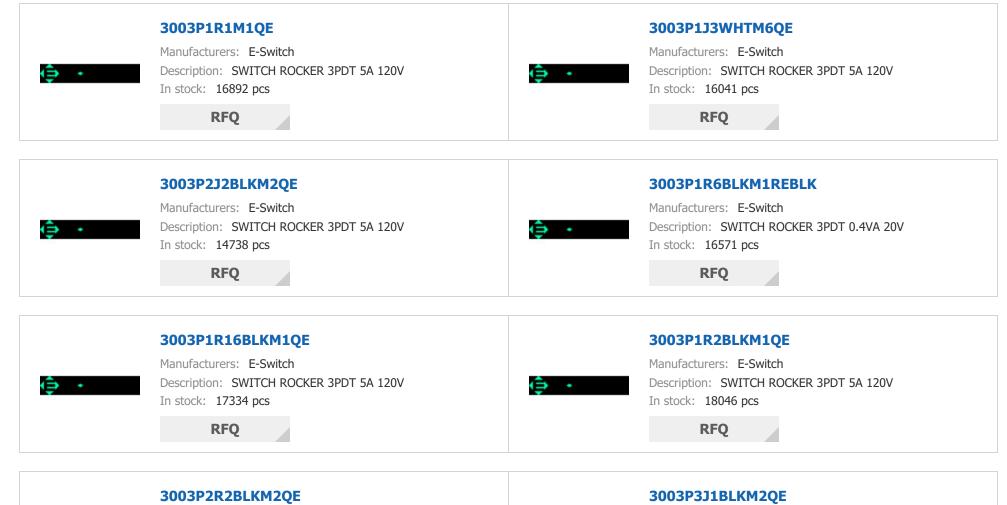

Manufacturers: E-Switch

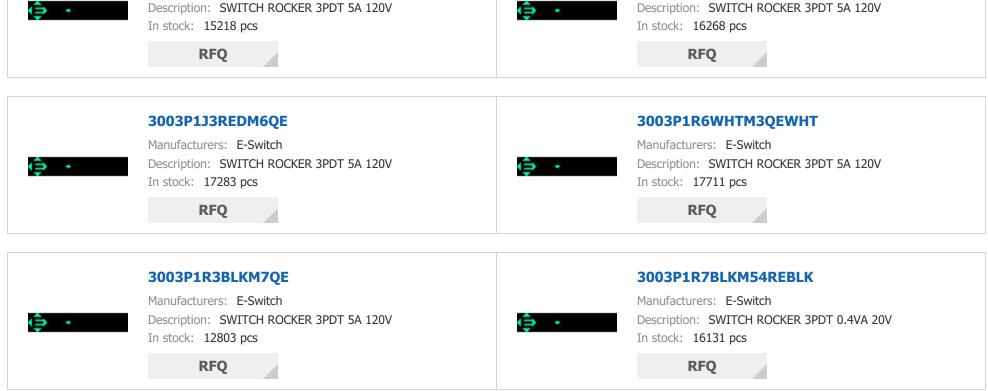

Copyright © 2020 Reliable Distributor of Electronic Components

E-mail: Info@infinity-electronic.com

Address: 17F, Gaylord Commercial Building, 114-118 Lockhart Road, Wan Chai, Hong Kong



Manufacturers: E-Switch