

TDA08H0SB1R

Part Number:
Manufacturer/Brand:
Product description
Datasheets:
RoHs Status
Stock Condition
Ship From
Shipment Way

TDA08H0SB1R

Hong Kong

DHL/Fedex/TNT/UPS/EMS

C&K SWITCH SLIDE DIP SPST 25MA 24V TDA08H0SB1R.pdf Lead free / RoHS Compliant 28029 pcs stock

REQUEST FOR QUOTATION

Image may be representation. See specifications for product details.


Specifications of TDA08H0SB1R

DESCRIPTIONSUTCH SLIDE DIP SPST 29M 24VLEAD FREE STATUS / ROHS STATUSLed fre / ROHS CompliantQUANTITY AVAILABLE2803 psDATA SHEETTO NOHHOBBUR, pdWASHABLEVSVOLTAGE RATING24VCSERIESTOAPTCH0.050° (1.27m), HalfPTCH0.050° (1.27m), HalfPACKAGINGVG TOAOTHER NAMES0.050° (1.27m), HalfOTHER NAMES0.050° (1.27m), HalfPTCH0.050° (1.27m), HalfPACKAGING0.050° (1.27m), HalfPACKAGING0.050° (1.27m), HalfOTHER NAMES0.050° (1.27m), HalfNUMER OF POSITIONS0.050° (1.27m), HalfMIDER OF POSITIONS0.050° (1.27m), HalfNUMER OF POSITIONS0.060° (1.27m), HalfLEINTER ALL OF POSITIONS0.000° (1.27m), Half <th></th> <th></th>		
DESCRIPTIONSUTCH SLOE DIP SPST 28M 24VLEAD FREE STATUS / ROHS STATUSLed fre/ / ROHS CompliantQUANTITY AVAILABLE2803 p.sDATA SHEETTO NOBHOSBIR.pdWASHABLEVSVOLTAGE RATING2400CTERMINATION STYLEGIM UINGSERIESTAPTCH0.50° (1.27m), HalfPACKAGINGCut Tape (TO)OTHER MARESCut Tape (TO)ONTAGE RATING60° (2.4	PART NUMBER	TDA08H0SB1R
LEAD FREE STATUS (RONE STATUSLead free / RoHSComplientQUANTTY AVALABLE3029 psDATA SHEETTOA06HOSEIR.pdWASHABLEVSVILTAGE RATING4040CSTERISTOAPTCH0.500° (1.27mm). HalfPTCH0.500° (1.27mm). HalfPACKAGING40°C ~ 85°COTHER NAMES60°C ~ 85°CNUMER OF POSITIONS8MOUTING TYPE0.900° (vgcsLINGTH1.000° (vgcsLINGTH0.900° (vgcsLINGTH0.900° (vgcsLINGTH0.900° (vgcsLINGTH0.900° (vgcsELENTHS0.901° (3.000m)FERTURES FORTUTS LEVEL (MSL)0.901° (3.000m)LINGTH0.901° (3.000m)LINGTH0.901° (3.000m)LINGTH0.901° (3.000m)LINGTH0.901° (3.000m)FERTURES FORTUTS LEVEL (MSL)0.901° (3.000m)LINGTH0.901° (3.000m)LINGTH0.900 (9.900m)LINGTH0.900 (9.900m)LINGTH<	MANUFACTURER	C&K
QUANITY AVAILABLE8020 psDATA SHEETImp ToX88H058IR.pdfWASHABLEYGVICTAGE RATINGVOCSTERISDAMPTCH0.050° (1.27mm). HalfPTCH0.050° (1.27mm). HalfPACKAGINGCM Tape (T)PAREADTANAMESSOTHER NAMESCM Tape (T)OTHER NAMESSC SSC SSC SSC SSC SSC SSC SSC SSC SSC	DESCRIPTION	SWITCH SLIDE DIP SPST 25MA 24V
DATA SHEETImport DADBABBIR.pdfWASHABLEYesVOLTAGE RATINGAUVCTERVINATION STYLEGUI WigSERIESTAPACKAGINGCTAGPC(TA)CHARLPACKAGINGCTAGPC(TA)CHARLOPERATING TEMPERATUREA0°C AS°CNUMBER OF POSITIONSA1°CA SMORTMUNTING TYPEJOROYAGENANDMOUTING TYPEJOROYAGENANDMUNTING TYPEJOROYAGENANDLEIGHT ABOVE BOARDA1°CA SACCADELICIENCIENCIENCIENCIENCIENCIENCIENCIENCIE	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
WSHABLEYesVOTAGE RATING2M2CTERILINATION STYLEGIU MigSERIESTAPTCH050° (127m) HalfPACKAGINGCM2000 (2000) (2000	QUANTITY AVAILABLE	28029 pcs
VOLTAGE RATING24VDCTERMINATION STYLEGul WigSERIESTAAPITCH0.50° (1.27m), HalfPACAGINGCut arg (CT)PACAGINGCut arg (CT)or TER NAMESCNASSING SUR	DATA SHEET	TDA08H0SB1R.pdf
TERMINATION STYLEGal WagSERIESTOAPITCH050° (1.27mm, HalfPACAGINGCMCQCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC	WASHABLE	Yes
SRIESDAPITCH0.50°(1.27m), HalfPACAGINGCut Pac (CT)PACAGINGCut Pac (CT)other NAMESCut Pac (CT)other NAMES- 0°C ~ 8°CNUMER OF POSITIONS4°C ~ 0°CMURDER OF POSITIONSSaMOUNTING TYPEVal GandaMOSTURE SENSITIVITY LEVEL (MSL)101/mitedLEGHAH0.00 QvdsLENGTH0.01 QvdsLENGTH0.01 QvdsLENGTH0.01 QvdsLENGTA DEVE DARD0.01 QvdsLENGTA DEVE DARD0.01 QvdsLENGTA DEVE DARD0.01 QvdsLENGTA DARD0.01 QvdsLENGTA DARD0.01 QvdsLENGTA DARD0.01 QvdsLENGTA DARDDiston StarturgDI CALL DESCRIPTIONDiston Starturg Actu Dard DARDCUTAT MATERIALDiston Starturg Conduct Job StarturgCUTAT MATERIALGibrall Conduct Job StarturgCUTAT FINISHGibrall Conduct Job StarturgCUTAT TAINSSpatCUTAT TAINS <td>VOLTAGE RATING</td> <td>24VDC</td>	VOLTAGE RATING	24VDC
PITCH0.50° (1.27m), HalfPACKAGINGCM Tape (CT)PACKAGINGCM Tape (CT)orther NAMESSM SOBSIR NDorther NAMES- MOS SOBSIR NDOPERATING TEMPERATURE- MOC ~ S°CNUMBER OF POSITIONS8MOUNTING TYPESuface MountMOSTURE SENSITIVITY LEVEL (MSL)I (Unimed)LENGTHI (MOL QUE)LENGTHI (MIRE CT)LENGTHI (MIRE CT)LENGTHARDI (MIRE CT) <td< td=""><td>TERMINATION STYLE</td><td>Gull Wing</td></td<>	TERMINATION STYLE	Gull Wing
PACKAGINGCut Tape (CT)orther NAMESTDAOBHOSBIR NDAOBHOSBIR-NDOFERATING TEMPERATURE-00°C * 8°CNUMBER OF POSITIONS8MOUNTING TYPESuface MountMOSTURE SENSITIVITY LEVEL (MSL)(10/Inited)MCHANICAL LIFE.000 (Qdes)LENGTH.044* (11.28m)HEIGHT ABOVE BOARD.001 (Qdes)ELEGTRICAL LIFE.001 (Qdes)CUTALTING.002 (Qdes)CUTALTING.	SERIES	TDA
TransmissionoTHER NAMESoTHER NAMESoTHER NAMESother NAMESoperating temperature40° < 85°	PITCH	0.050" (1.27mm), Half
OTHER NAMESCNSSHGSTRADOPERATING TEMPERATURE40°C AS°CNUMBER OF POSITIONS8MOUNTING TYPESuface MontaMODATING TYPE(Julimited)MECHANICAL LIFE0100 (Qale)LINGTH044°C (Jale)LEAD FREE STATUS / ROHS STATUS0101 (Qale)HEGHT ABOVE BOARD0101 (Qale)FLATURES0101 (Qale)LECTRICAL LIFE0101 (Qale)LECTRICAL LIFE0100 (Qale)CINTACT MATERIAL1000 (Qale)CINTACT MATERIAL0100 (Qale)CINTACT MATERIAL0100 (Qale)CONTACT MATERIAL0100 (Qale)CONTACT FINISH0100 (Qale)CONTACT FINISH0100 (Qale)CONTACT FINISH0100 (Qale)CONTACT FINISH0100 (Qale)CONTACT MATERIAL0100 (Qale)CONTACT FINISH0100 (Qale)CONTACT FINISH0100 (Qale)CONTACT MATERIAL0100 (Qale)CONTACT MAT	PACKAGING	Cut Tape (CT)
NUMBER OF POSITIONS8MOUNTING TYPEGrafe AdoutMOISTURE SENSITIVITY LEVEL (MSL)I/UnitedaMCHANICA LIFEJ00 (QdeaLENGTHGrafe Adout (Manual)LENGTHGrafe Adout (Manual)LENGTH ABOVE BOARDGolf (Manual)FATURESJ00 (QdeaFATURESJ00 (QdeaLECTRICAL LIFEJ00 (QdeaLECTRICAL LIFEJ00 (QdeaCINTACT MATERIALSMON (Manual)CINTACT MATERIALGrafe Adout (Manual)CINTACT MATERIALGna (Manual)CINTACT MATERIALGrafe Adout (Manual)CINTACT MATERIALSMON (Manual)CINTACT MATERIALGrafe Adout (Manual)CINTACT MATERIALSMON (Manual)CINTACT MATERIALSMON (Manual)CINTACT MATERIALGrafe Adout (Manual)CINTACT MATERIALSMON (Manual)	OTHER NAMES	CKN9504CT
MOUNTING TYPESurface MountMOUNTING TYPE(ulnimedyMOISTURE SENSITIVITY LEVEL (MSL)(ulnimedyMECHANICAL LIFE.000 CyclesLENGTH0.444" (1.28mm)LEAD FREE STATUS / ROHS STATUS.eda free / ROHS CompliantHEIGHT ABOVE BOARD.001" (2.30mm)FEATURES.000 CyclesELCETRICAL LIFE.000 CyclesDETAILED DESCRIPTION.000 CyclesCURRENT RATING.000 CyclesCONTACT MATERIAL.000 CyclesCONTACT FINISH.000 CyclesCO	OPERATING TEMPERATURE	-40°C ~ 85°C
MOISTURE SENSITIVIT LEVEL (MSL)i (Ulimitad)MCHANICAL LIFE1,00 CyclesLENGTH0.44* (1.128mm)LEAD FREE STATUS / ROHS STATUS6ad free / RoHS CompliantHEIGHT ABOVE BOARD0.91* (2.30mm)FEATURES1,00 CyclesELCTRICAL LIFE0.90* (2.30mf)DETAILED DESCRIPTIONDiswich SPAT Bosition Surface Mount Slide (Standard) Actuator 25mA 24VDCCURRENT RATINGCopre AllonCONTACT FINISHGoleCUNTACT FINISHSBTCURTACTSPT	NUMBER OF POSITIONS	8
MECHANICAL LIFEi,000 QielaLENGTH0.444* (1.128mm)LEAD FLEE STATUS / ROHS STATUSEdd Flee / ROHS CompliantHEIGH ABOVE BOARD0.91* (2.30mm)FATURESTape SalFLECTRICAL LIFE0.900 QielaDETALED DESCRIPTIONDis Wich SPST A Position Surface Mount Slide (Standard) Actuator 25mA 24VDCCURRENT RATINGDisper AllongCONTACT FINISHGielaCONTACT FINISHSingCURTURSingSingSingSingSing<	MOUNTING TYPE	Surface Mount
Lend0.444" (1.28mm)LEAD FREE STATUS / ROHS STATUSKed free / ROHS CompliantHEIGHT ABOVE BOARD0.91" (.30mm)FEATURESTape SealELECTRICAL LIFE.000 CyclesDETAILED DESCRIPTIONSim (Statistica Statistica Statisti	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
LAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGH ABOVE BOARD0.091°(2.30mm)FATURESTape SealELECTRICAL LIFE0.000 (Sec)DETAILED DESCRIPTIONDis Wich SPST 8 Position Surface Mount Slide (Standard) Actuator 25mA 24VDCCURRENT RATINGSomaCONTACT MATERIALCoper AlloyCONTACT FINISHGoldCIRCUITState State	MECHANICAL LIFE	1,000 Cycles
HEIGHT ABOVE BOARD.091" (2.30mm)FEATURESTape SealELECTRICAL LIFE.000 CyclesDETAILED DESCRIPTIONDis Witch SPS 16 Motion Sufface Mount Slide (Standard) Actuator 25mA 24VDCCURRENT RATING.000 CyclesCONTACT MATERIAL.000 CyclesCONTACT FINISH.001 CyclesCURCUIT.001 CyclesBIR.001 CyclesCURRENT RATING.001 CyclesC	LENGTH	0.444" (11.28mm)
FEATURESTape SealELECTRICAL LIFE.000 CyclesDETAILED DESCRIPTIONDis Wich SPSt B Ostiface Mount Slide (Standard) Actuator 25mA 24VDCCURRENT RATING.000 CyclesCONTACT MATERIAL.000 CyclesCONTACT FINISH.000 CyclesCIRCUIT.000 Cycles	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ELECTRICAL LIFE1,000 CyclesDETAILED DESCRIPTIONDip Switch SPST 8 Position Surface Mount Slide (Standard) Actuator 25mA 24VDCCURRENT RATING25mACONTACT MATERIALCoper AlloyCONTACT FINISHGoldCIRCUITSPST	HEIGHT ABOVE BOARD	0.091" (2.30mm)
DETAILED DESCRIPTIONDip Switch SPST 8 Position Surface Mount Slide (Standard) Actuator 25mA 24VDCCURRENT RATING25mACONTACT MATERIALCoper AlloyaCONTACT FINISHGoldCRCUITSPST	FEATURES	Tape Seal
CURRENT RATING 25mA CONTACT MATERIAL Coper Alloy CONTACT FINISH Gold CIRCUIT SPE	ELECTRICAL LIFE	1,000 Cycles
CONTACT MATERIAL Copper Alloy CONTACT FINISH Gold CIRCUIT SPST	DETAILED DESCRIPTION	Dip Switch SPST 8 Position Surface Mount Slide (Standard) Actuator 25mA 24VDC
CONTACT FINISH Gold CIRCUIT SPST	CURRENT RATING	25mA
CIRCUIT SPST	CONTACT MATERIAL	Copper Alloy
	CONTACT FINISH	Gold
	CIRCUIT	SPST
BODY MATERIAL Polyphenylene Sulfide (PPS)	BODY MATERIAL	Polyphenylene Sulfide (PPS)
ACTUATOR TYPE Slide (Standard)	ACTUATOR TYPE	Slide (Standard)
ACTUATOR LEVEL Flush, Recessed	ACTUATOR LEVEL	Flush, Recessed

Related Tags

C&K TDA08H0SB1R	TDA08H0SB1R Distributor	TDA08H0SB1R Supplier
TDA08H0SB1R Price	TDA08H0SB1R Pictures	TDA08H0SB1R Image
TDA08H0SB1R PDF Datasheet	TDA08H0SB1R Download Datasheet	TDA08H0SB1R Datasheet
TDA08H0SB1R Stock	Buy TDA08H0SB1R	Buy C&K TDA08H0SB1R
C&K TDA08H0SB1R	C&K Supplier	C&K Distributor
C&K TDA08H0SB1R	C&K Components TDA08H0SB1R	

Related Products

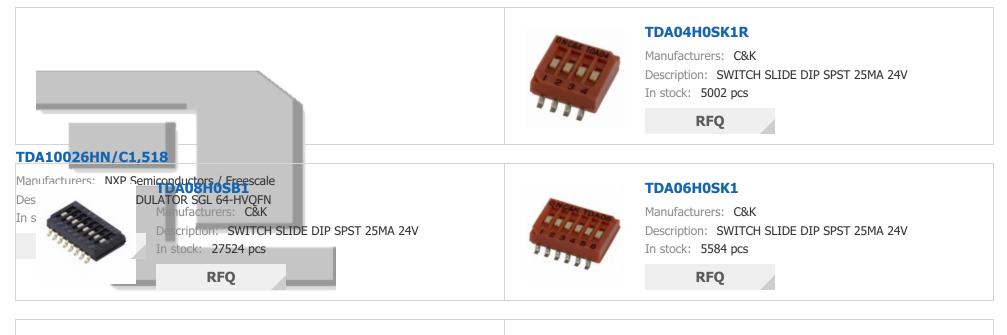



TDA08H0SK1R

Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: 5583 pcs

RFQ

TDA10025HN/C1,518



TDA08H0SK1

Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: 5777 pcs

RFQ



Copyright © 2020 Reliable Distributor of Electronic Components

E-mail: Info@infinity-electronic.com

Address: 17F, Gaylord Commercial Building, 114-118 Lockhart Road, Wan Chai, Hong Kong



