

### **Current Transducer LA 55-TP/SP27**

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic separation between the primary circuit and the secondary circuit.




E	ectr	icai	data	

	Primary nominal rms	s current	50		А
	Primary current, measuring range		0 ±	0 ± 100	
$R_{M}$	Measuring resistance @ 85 °C				
IVI			$R_{\rm M  min}$	$R_{_{Mmax}}$	
	with ± 12 V	$@\pm 50 A_{max}$	0	210	Ω
		@ ± 100 A <sub>max</sub>	0	30	Ω
	with ± 15 V	$@ \pm 50 A_{max}$	30	320	Ω
		@ ± 100 A <sub>max</sub>	30	90	Ω
$I_{\rm SN}$	Secondary nominal		25		mΑ
I <sub>sn</sub> K <sub>n</sub>	Conversion ratio		1 : 20	00	
U <sub>c</sub>	Supply voltage (± 5	%)	± 12 .	. 15	V
I <sub>c</sub>	Current consumption	า	10 (@	$\pm$ 15 V) + $I_{\rm S}$	mΑ
Ac	Accuracy - Dynamic performance data				

X	Accuracy @ $I_{PN}$ , $T_{A}$ = 25 °C @	± 15 V (± 5 %)	± 0.65	5	%
	@	± 12 15 V (± 5 %)	± 0.90	)	%
ε	Linearity error		< 0.15	5	%
-			Тур	Max	
$I_{\rm o}$	Offset current @ $I_{\rm P}$ = 0, $T_{\rm A}$ = 25	5 °C		± 0.1	mA
I <sub>OM</sub>	Magnetic offset current <sup>1)</sup> @ I <sub>P</sub>	= 0 and specified $R_{M}$ ,			
0.11	after	an overload of 3 × $I_{_{\rm PN}}^{_{\rm m}}$		± 0.2	mA
$I_{OT}$	Temperature variation of $I_{ m o}$	- 25 °C + 85 °C	± 0.1	± 0.3	mA
0,	u u u u u u u u u u u u u u u u u u u	- 40 °C 25 °C	± 0.2	± 0.5	mA
t <sub>ra</sub>	Reaction time		< 500		ns
t,	Step response time <sup>2)</sup> to 90 %	of I <sub>PN</sub>	< 1		μs
di/dt	di/dt accurately followed		> 200		A/µs
BW	Frequency bandwidth (- 1 dB)		DC :	200	kHz
G	eneral data				

TA	Ambient operating temperature	- 40 + 85
Ts	Ambient storage temperature	- 50 + 90
Ř	Resistance of secondary winding @ $T_{A}$ = 85 °C	150
m	Mass	35
	Standards	EN 50155: 1995
		UL 508: 2010

## *I*<sub>PN</sub> = 50 A



#### **Features**

- Closed loop (compensated) current transducer using the Hall effect
- Insulating plastic case recognized according to UL 94-V0.

#### **Special features**

- I<sub>PM</sub> = 0 .. ± 100 A
- K<sub>N</sub> = 1 : 2000
- U<sub>d</sub> = 3.6 kV (to see page 2)
- $T_{A}^{-}$  = 40 °C .. + 85 °C
- Potted.

°C

°C Ω

g

#### **Advantages**

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

#### **Applications**

- Single or three phases inverters
- Propulsion and braking choppers
- Propulsion converters
- Auxiliart converters •
- Battery chargers.

#### **Application domain**

• Traction.

Notes: 1) Result of the coercive field of the magnetic circuit

<sup>2)</sup> With a d*i*/d*t* of 100 A/µs.



#### Current Transducer LA 55-TP/SP27

In	Insulation coordination				
U <sub>d</sub>	Rms voltage for AC insulation test, 50 Hz, 1 min	3.6	kV		
$\hat{U_w}$	Impulse withstand voltage 1.2/50 µs	7.5	kV		
		Min			
d <sub>cn</sub>	Creepage distance <sup>1)</sup>	8.3	mm		
d <sub>Cp</sub> d <sub>CI</sub>	Clearance <sup>2)</sup>	8.3	mm		
CTI	Comparative tracking index (group I)	600			

Notes: <sup>1)</sup> Distance between hole busbar and winding

<sup>2)</sup> Direct distance between hole busbar and winding.

#### Safety



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).

Ignoring this warning can lead to injury and/or cause serious damage.


This transducer is a build-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.



#### Dimensions LA 55-TP/SP27 (in mm)

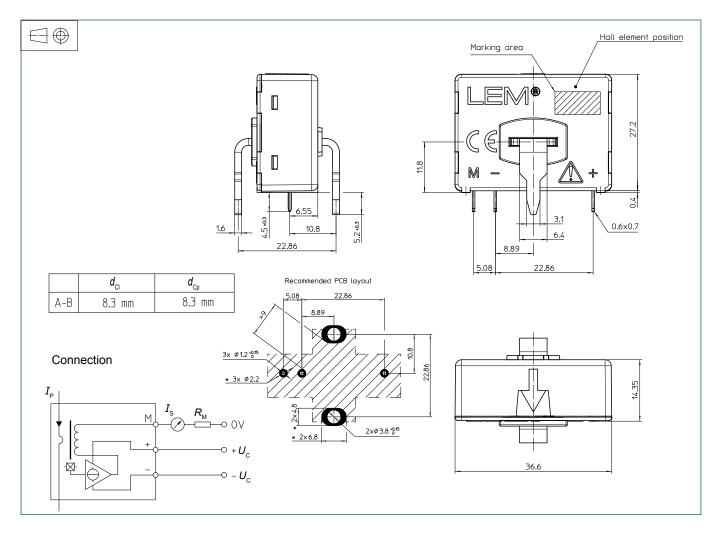

#### **Mechanical characteristics**

Recommended PCB hole

# General tolerance ± 0.2 mm Fastening & connection of primary Bus bar 6.4 × 1.6 mm Recommended PCB hole 3.8 mm Fastening & connection of secondary 3 pins

3.8 mm 3 pins 0.6 × 0.7 mm ø 1.2 mm

#### Remarks

- $I_{\rm S}$  is positive when  $I_{\rm P}$  flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 90 °C.
- Installation of the transducer must be done unless otherwise specified on the datasheet, according to LEM Transducer Generic Mounting Rules. Please refer to LEM document N°ANE120504 available on our Web site: Products/Product Documentation.