


## Part Number: XZRNI45S

### 3.5x2.8mm PHOTOTRANSISTOR

### Features

- Long life and robust package
- Standard Package: 2000pcs/ Reel
- MSL (Moisture Sensitivity Level): 3
- $\bullet$  RoHS compliant



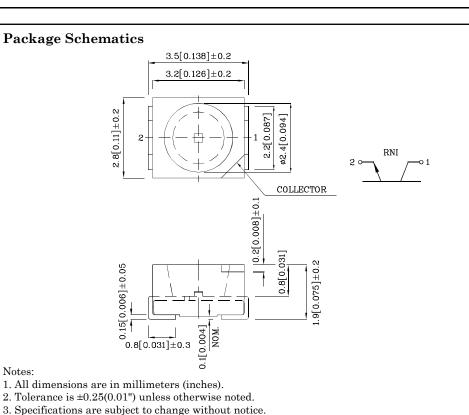

### Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Min.	Тур.	Max.	Unit	Test Condiction
VBR CEO	Collector-to-Emitter Breakdown Voltage	30			V	Ic=100µA Ee=0mW/cm <sup>2</sup>
VBR ECO	Emitter-to-Collector Breakdown Voltage	5			V	IE=100µA Ee=0mW/cm <sup>2</sup>
VCE(SAT)	Collector-to-Emitter Saturation Voltage			0.8	V	IC=2mA Ee=20mW/cm <sup>2</sup>
Iceo	Collector Dark Current			100	nA	VCE=10V Ee=0mW/cm <sup>2</sup>
TR	Rise Time (10% to 90%)		15		μs	Vce=5V Ic=1mA Rl=1KΩ
$\mathrm{T}\mathrm{F}$	Fall Time (90% to 10%)		15		μs	
I(ON)	On State Collector Current	0.2	0.4		mA	$\begin{array}{c} V{\rm CE}{=}5V\\ {\rm Ee}{=}1mW/cm^2\\ \lambda{=}940nm \end{array}$

## Absolute Maximum Ratings at TA=25°C

Parameter	Maximum Ratings		
Collector-to-Emitter Voltage	30V		
Emitter-to-Collector Voltage	5V		
Power Dissipation at (or below) 25°C Free Air Temperature	100mW		
Operating / Storage Temperature Range	-40°C To +85°C		


A Relative Humidity between 40% and 60% is recommended in ESD-protected work areas to reduce static build up during assembly process (Reference JEDEC/JESD625-A and JEDEC/J-STD-033)




### **Handling Precautions**


Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.

1. Handle the component along the side surfaces by using forceps or appropriate tools.




2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.

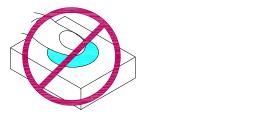




3. Do not stack together assembled PCBs containing exposed LEDs. Impact may scratch the silicone lens or damage the internal circuitry.





4.1. The inner diameter of the SMD pickup nozzle should not exceed the size of the LED to prevent air leaks.4.2. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.4.3. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.





5. As silicone encapsulation is permeable to gases, some corrosive substances such as  $H_2S$  might corrode silver plating of leadframe. Special care should be taken if an LED with silicone encapsulation is to be used near such substances.




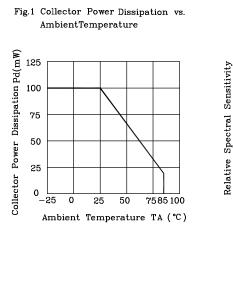


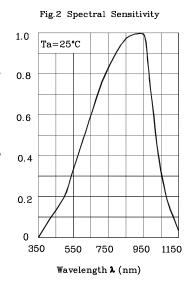
















Typical Electro-Optical Characteristics Curves






Load Resistance RL(k**Q**)

# **\*** LED is recommended for reflow soldering and soldering profile is shown below.


Reflow Soldering Profile for SMD Products (Pb-Free Components)

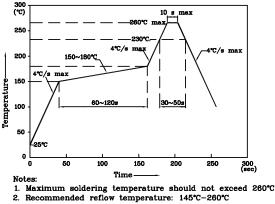


3. Do not put stress to the epoxy resin during


high temperatures conditions

### Tape Specification (Units : mm)




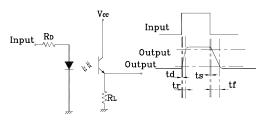


✤ The device has a single mounting surface. The device must be mounted according to the specifications.




### Recommended Soldering Pattern (Units : mm; Tolerance: ± 0.1)



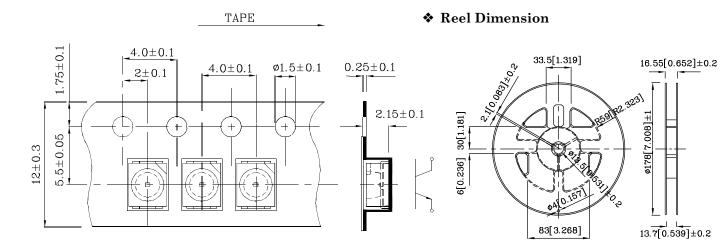



## PACKING & LABEL SPECIFICATIONS

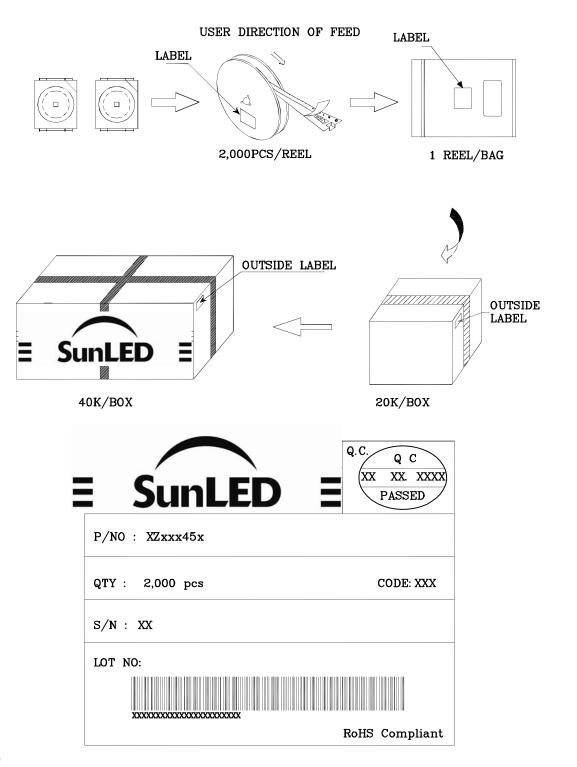

#### TERMS OF USE

- 1. Data presented in this document reflect statistical figures and should be treated as technical reference only.
- 2. Contents within this document are subject to improvement and enhancement changes without notice.
- 3. The product(s) in this document are designed to be operated within the electrical and environmental specifications indicated on the datasheet. User accepts full risk and responsibility when operating the product(s) beyond their intended specifications.
- 4. The product(s) described in this document are intended for electronic applications in which a person's life is not reliant upon the LED. Please consult with a SunLED representative for special applications where the LED may have a direct impact on a person's life.
- 5. The contents within this document may not be altered without prior consent by SunLED.
- 6. Additional technical notes are available at http://www.SunLEDusa.com/TechnicalNotes.asp

Oct 12, 2016