


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0603 NPO 6pF 50V (0603N6R0D500CT)

1. Dimension

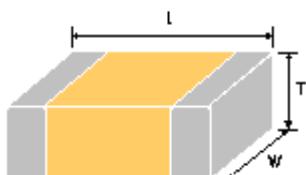

Size Inch (mm)	L (mm)	W (mm)	T (mm)
0603 (1608)	1.60±0.10	0.80±0.10	0.80±0.07


2. Cap, DF, IR @25°C

(Cap, DF @1MHz, 1Vrms ; IR @50V, 120sec)

Item	Spec
Cap [pF]	6 (± 0.5 pF)
DF	$\leq 0.19\%$
IR [G-ohm]	>10

3. Impedance/ESR-Frequency

(Equipment: 4287A+ENA5071C)

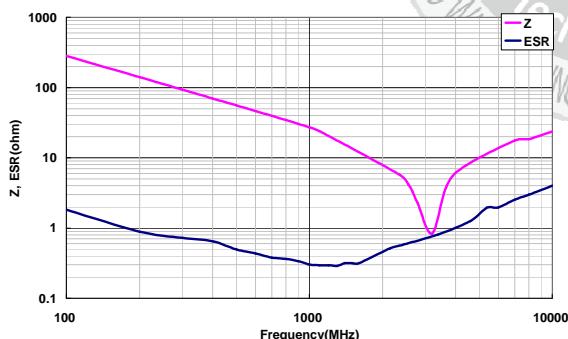

4. Capacitance – Temperature Characteristics


(Equipment: 4284A)

≤ 10 pF , The TCC measurement is unstable and high deviation

5. Capacitance – DC Voltage Characteristics

(Equipment: 4284A; DC charge 60±5sec)

25V :0% ; 50V :0%

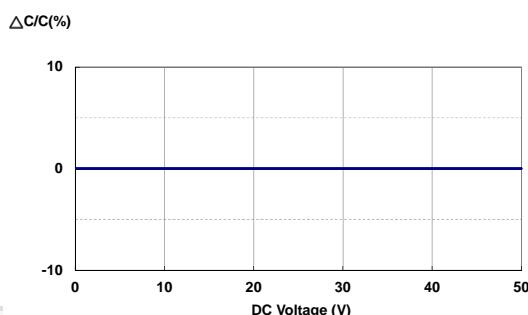

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

